DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase

Product code : 17230020

Frame	: 143/5TC
Output	: 2 HP (1.5 kW)
Poles	: 4
Frequency	: 60 Hz
Rated voltage	: 230/460 V
Rated current	: 5.72/2.86 A
L. R. Amperes	: 47.5/23.7 A
LRC	: 8.3x(Code L)
No load current	: 3.46/1.73 A
Rated speed	: 1750 rpm
Slip	: 2.78 %
Rated torque	: 0.829 kgfm
Locked rotor torque	: 280 %
Breakdown torque	: 350 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.0066 kgm²
Design	: B

Locked rotor time	: 18s (cold) 10s (hot)
Temperature rise	: 80 K
Duty cycle	: Cont.(S1)
Ambient temperature	: -20°C to +40°C
Altitude	: 1000 m.a.s.l.
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: F-1
Rotation[1]	: Both (CW and CCW)
Noise level[2]	: 51.0 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 23.0 kg

Output	50%	75%	100%
Efficiency (%)	85.0	86.0	86.5
Power Factor	0.55	0.68	0.76

Foundation loads

Max. traction	: 68 kgf
Max. compression	: 97 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
16.9	13.4	12.0	12.1	8.7	7.9	5.9

		Drive end	Non drive end
Bearing type	:	6205 ZZ	6204 ZZ
Sealing	:	V'Ring	Lip Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/08/2026		1 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Brake information

Voltage: 440-480 V
Brake Torque: 1.63 kgfm

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/08/2026		2 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase

Product code : 17230020

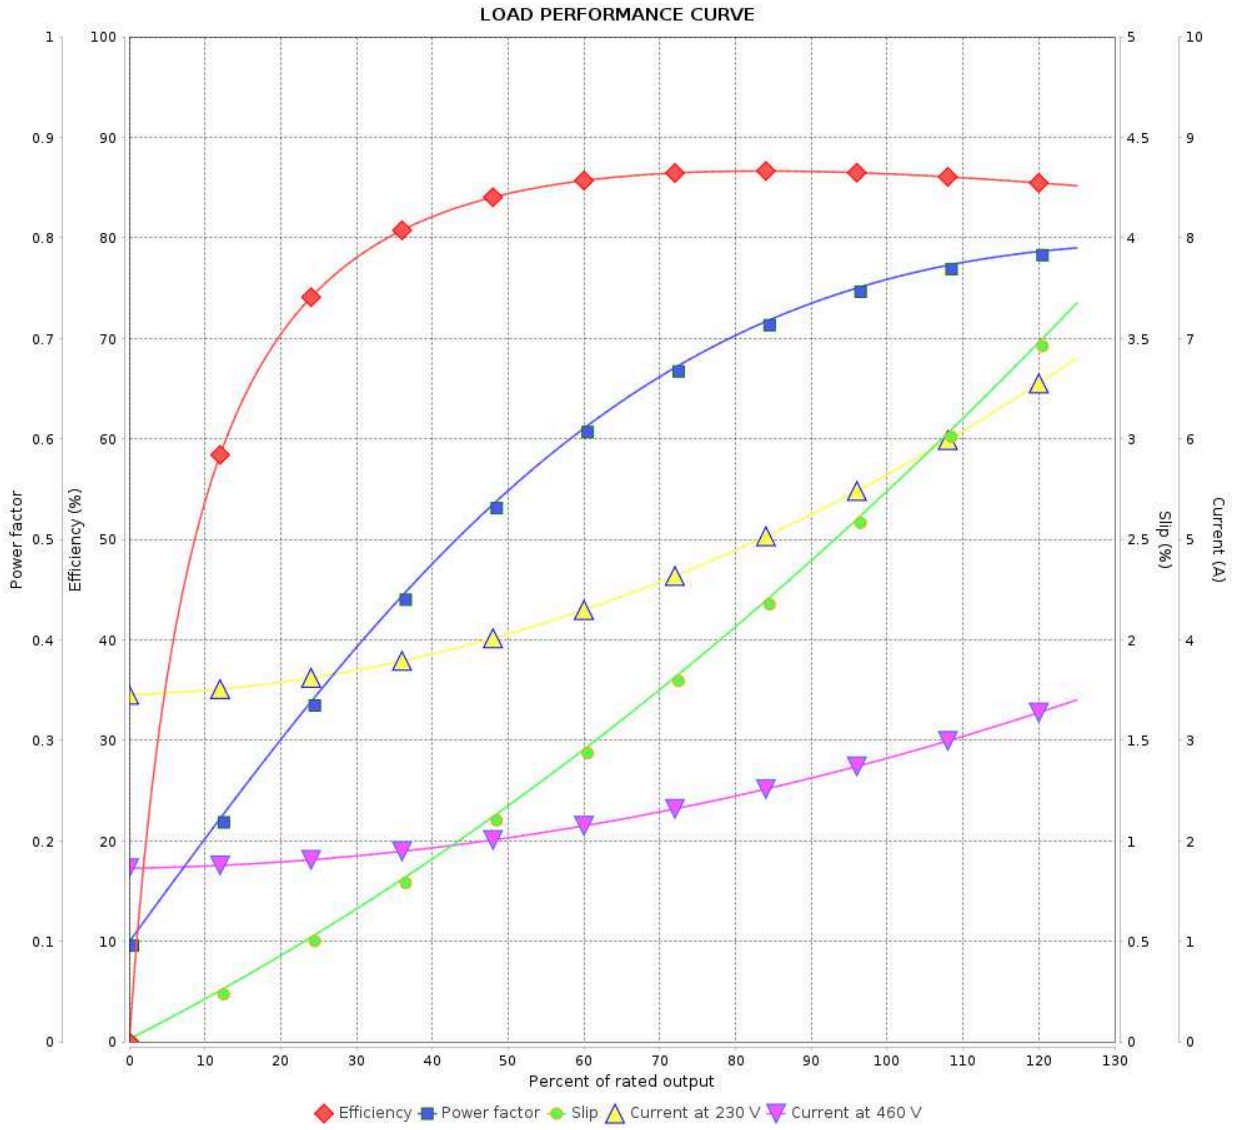


Performance	: 230/460 V 60 Hz 4P		
Rated current	: 5.72/2.86 A	Moment of inertia (J)	: 0.0066 kgm²
LRC	: 8.3	Duty cycle	: Cont.(S1)
Rated torque	: 0.829 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.25
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1750 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	14/08/2026		3 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

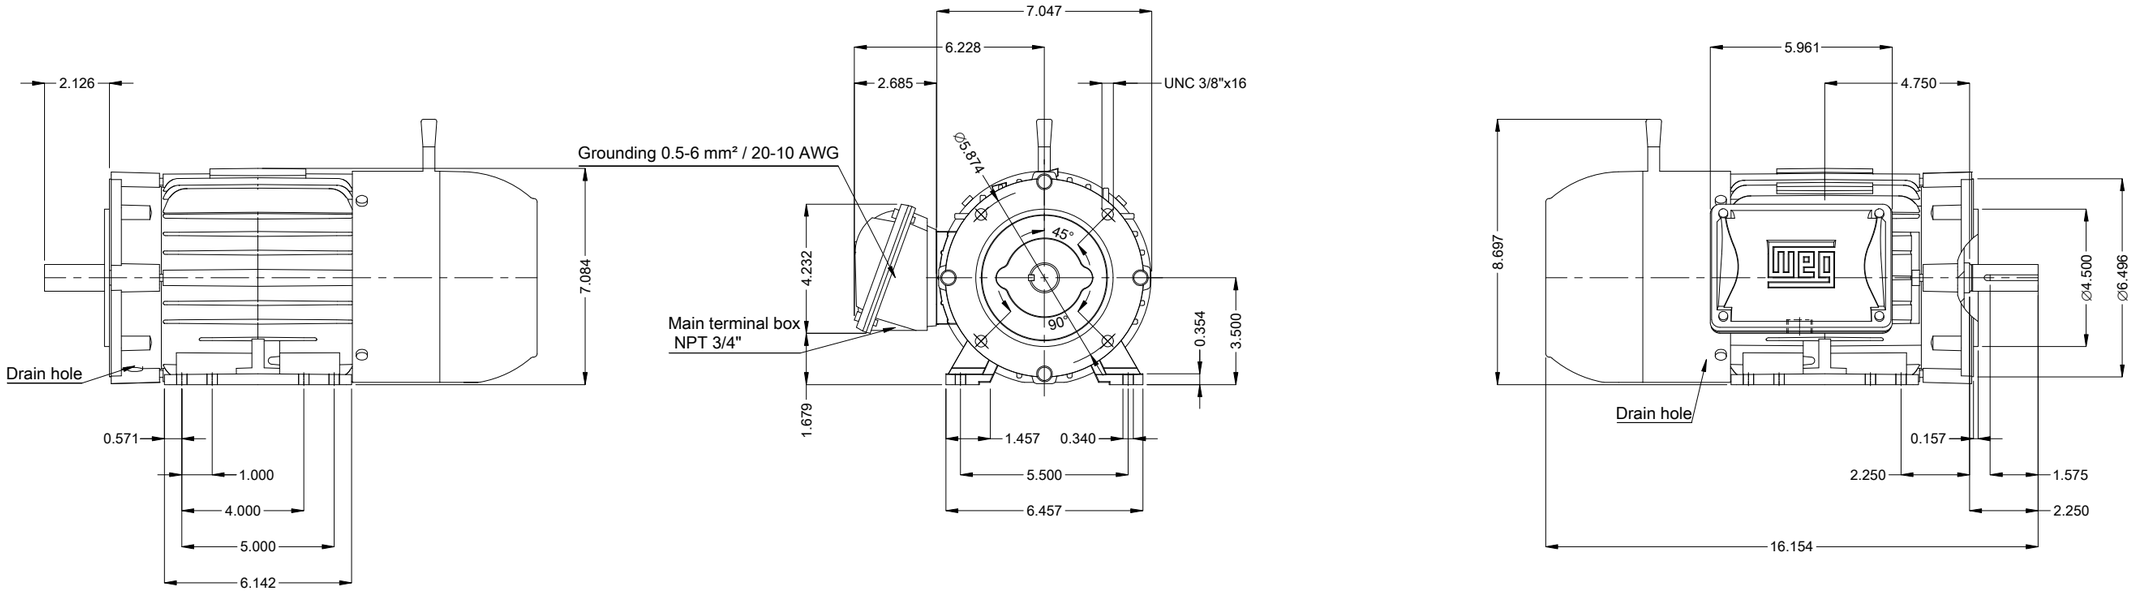

With brake 10 (16 Nm)
Brake voltage 440-480 V
Color RAL 5009
Painting plan 207A
Mounting NEMA F-1
Mounting B34D

DE Shaft End



2 HP 04 Poles 60 Hz

A

Scale 1 : 5

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W22 BRAKE MOTOR NEMA PREM. EFF.
FRAME 143/5TC IP55 TEFC

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.