

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 15145898		
Frame : W56C	Insulation class : F	Cooling method : IC01 - ODP	Mounting : F-1	
Duty cycle : Cont.(S1)	Ambient temperature : -20°C to +40°C	Rotation ¹ : Both (CW and CCW)	Starting method : Direct On Line	
Altitude : 1000 m.a.s.l.	Design : N	Approx. weight ³ : 10.0 kg	Moment of inertia (J) : 0.0011 kgm ²	
Output [HP]	0.5			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	4.80/2.65-2.40			
L. R. Amperes [A]	42.2/23.3-21.1			
LRC [A]	8.8x(Code L)			
No load current [A]	1.60/0.690-0.800			
Rated speed [RPM]	3510			
Slip [%]	2.50			
Rated torque [kgfm]	0.103			
Locked rotor torque [%]	270			
Breakdown torque [%]	300			
Service factor				
Temperature rise	80 K			
Locked rotor time	16s (cold) 9s (hot)			
Noise level ²	56.0 dB(A)			
Efficiency (%)	25%			
	50%	60.0		
	75%	68.0		
	100%	72.4		
Power Factor	25%			
	50%	0.90		
	75%	0.93		
	100%	0.94		
Bearing type : 6203 ZZ	Drive end	Non drive end	Foundation loads	
Sealing : Without			Max. traction : 5 kgf	
	Bearing Seal	Bearing Seal	Max. compression : 15 kgf	
Lubrication interval : -	-	-		
Lubricant amount : -	-	-		
Lubricant type : Mobil Polyrex EM				
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by				
Date	17/05/2022		Page	Revision
			1 / 2	

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 15145898


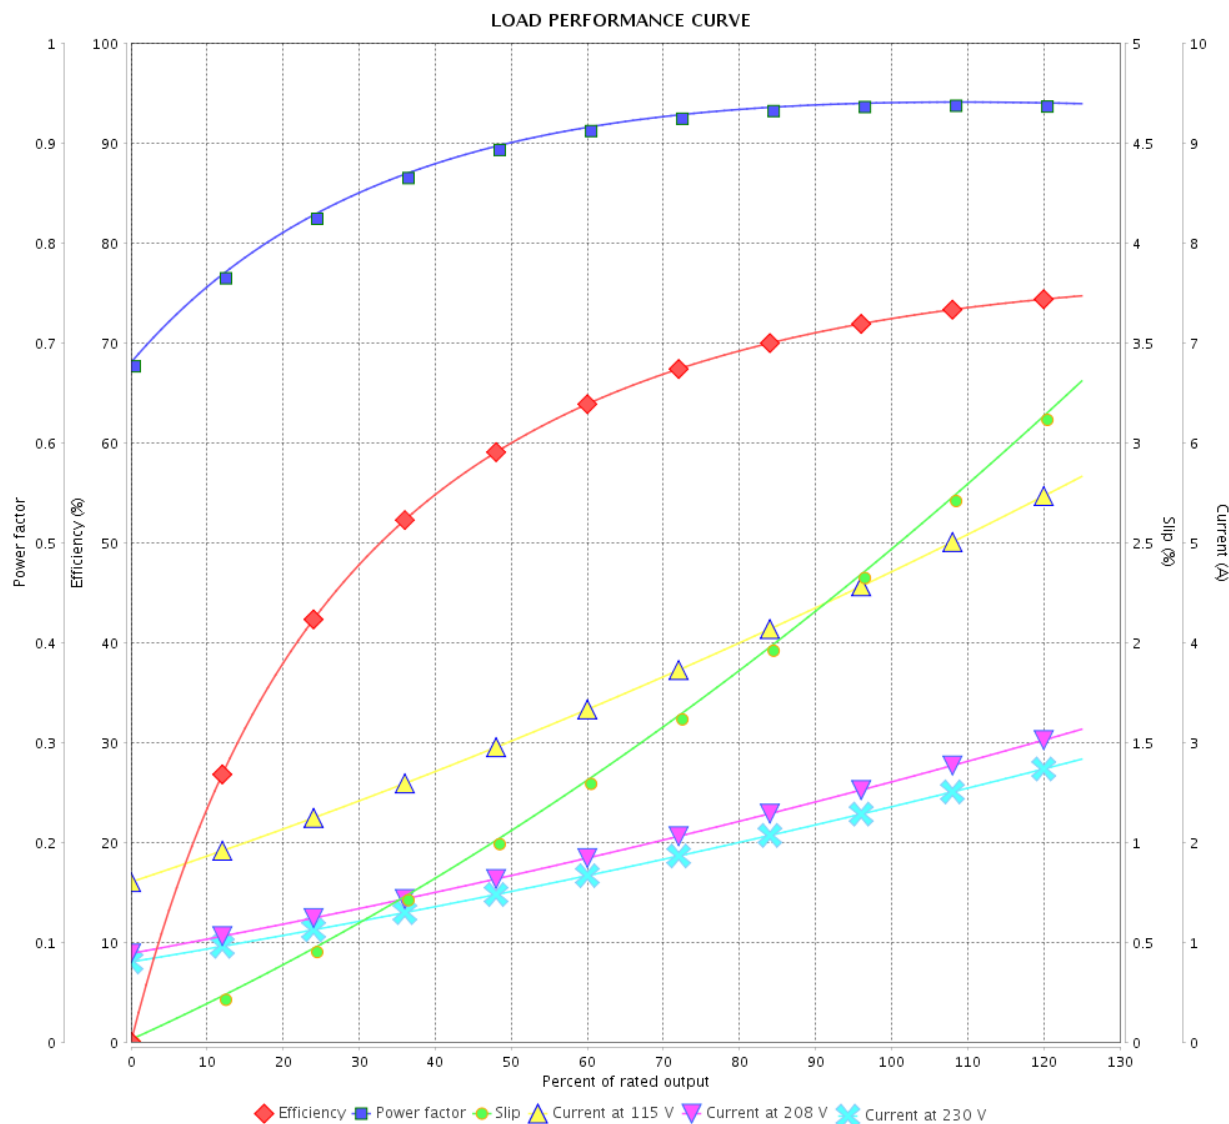


Performance : 115/208-230 V 60 Hz 2P

Rated current : 4.80/2.65-2.40 A
 LRC : 8.8
 Rated torque : 0.103 kgfm
 Locked rotor torque : 270 %
 Breakdown torque : 300 %
 Rated speed : 3510 rpm

Moment of inertia (J) : 0.0011 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date					
	17/05/2022				

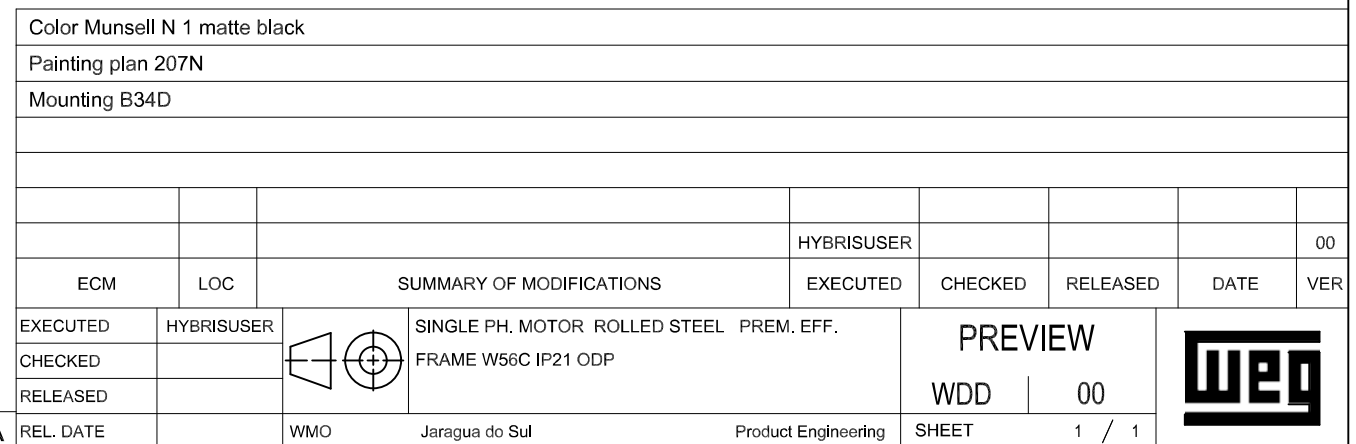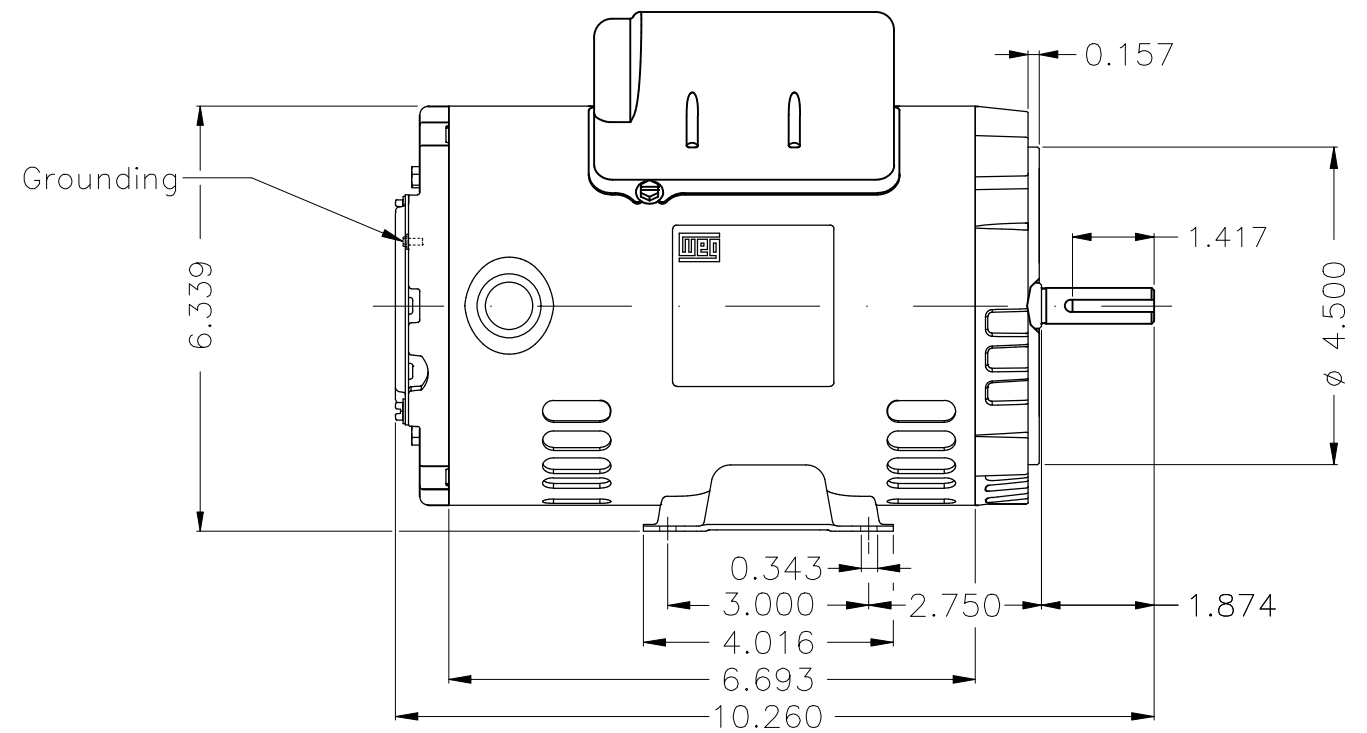

WEG's property. Forbidden reproduction without previous authorization.