

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 14733578		
Frame : 56H	Insulation class : F	Cooling method : IC01 - ODP	Mounting : F-1	
Duty cycle : Cont.(S1)	Ambient temperature : -20°C to +40°C	Rotation ¹ : Both (CW and CCW)	Starting method : Direct On Line	
Altitude : 1000 m.a.s.l.	Design : L	Approx. weight ³ : 21.8 kg	Moment of inertia (J) : 0.0057 kgm ²	
Output [HP]	1.5			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	13.0/7.52-6.49			
L. R. Amperes [A]	105/60.9-52.6			
LRC [A]	8.1x(Code K)			
No load current [A]	4.60/1.98-2.30			
Rated speed [RPM]	1740			
Slip [%]	3.33			
Rated torque [kgfm]	0.626			
Locked rotor torque [%]	320			
Breakdown torque [%]	229			
Service factor				
Temperature rise	80 K			
Locked rotor time	39s (cold) 22s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%			
	50%	80.5		
	75%	83.0		
	100%	83.8		
Power Factor	25%			
	50%	0.78		
	75%	0.85		
	100%	0.88		
Bearing type : 6204 ZZ	Drive end	Non drive end	Foundation loads	
Sealing : Without			Max. traction : 35 kgf	
	Bearing Seal	Bearing Seal	Max. compression : 57 kgf	
Lubrication interval : -	-	-		
Lubricant amount : -	-	-		
Lubricant type : Mobil Polyrex EM				
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 14733578

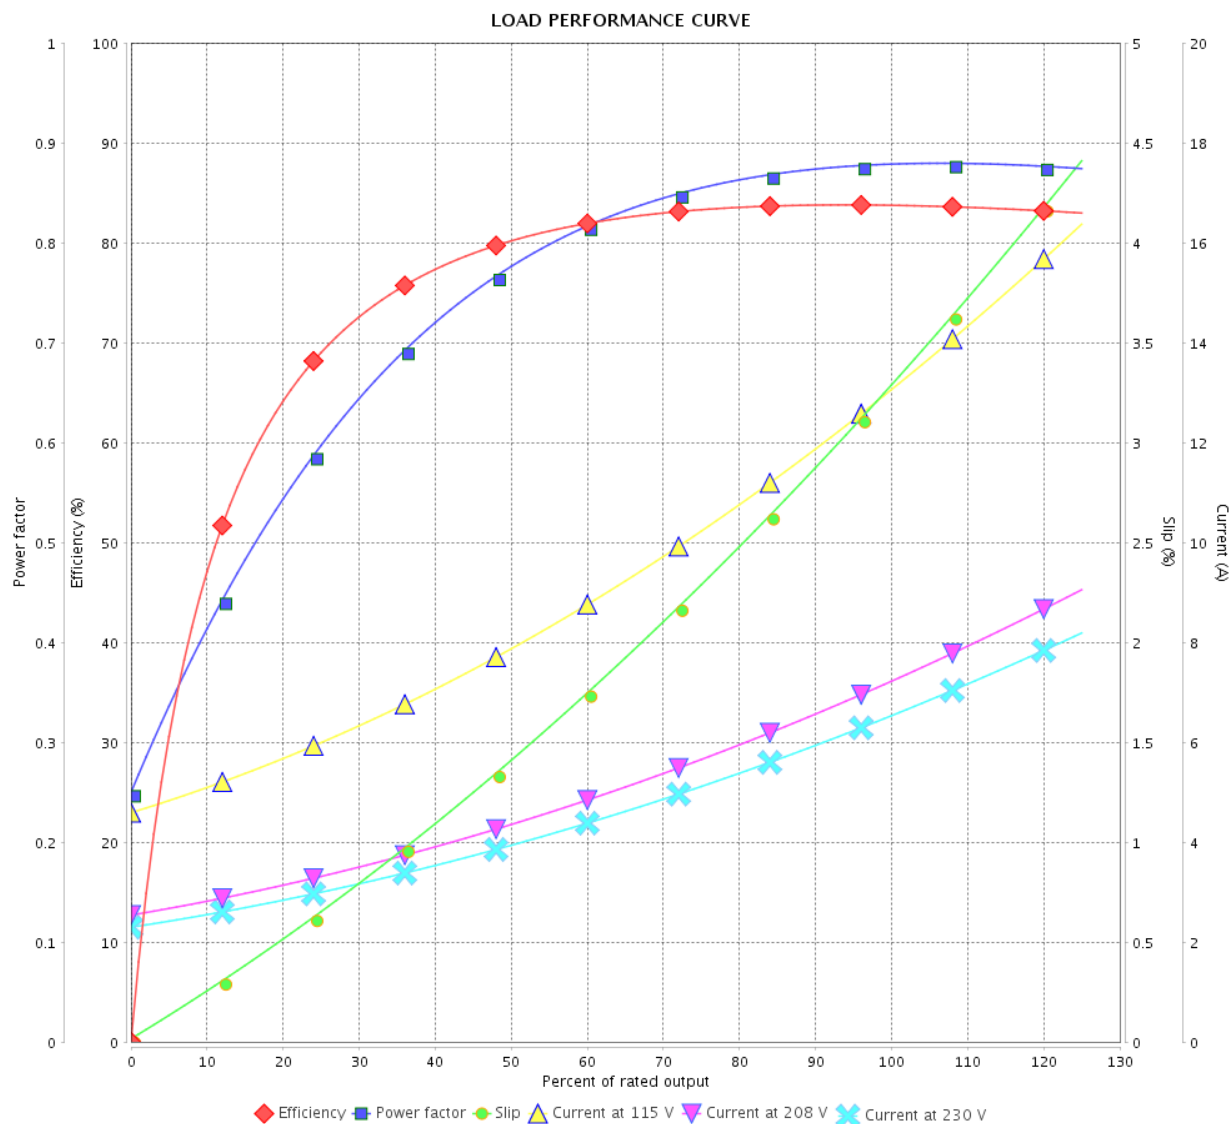

Performance : 115/208-230 V 60 Hz 4P

Rated current : 13.0/7.52-6.49 A
 LRC : 8.1
 Rated torque : 0.626 kgfm
 Locked rotor torque : 320 %
 Breakdown torque : 229 %
 Rated speed : 1740 rpm

Moment of inertia (J) : 0.0057 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : L

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

