

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



|                                                                                                                                                                                                                                                                                        |                                             |                                 |                           |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------|---------------------------|----------|
| Customer :                                                                                                                                                                                                                                                                             |                                             |                                 |                           |          |
| Product line                                                                                                                                                                                                                                                                           |                                             | : Jet Pump - C type Three-Phase | Product code :            | 14813761 |
| Frame                                                                                                                                                                                                                                                                                  | : 56C                                       | Cooling method                  | : IC01 - ODP              |          |
| Insulation class                                                                                                                                                                                                                                                                       | : F                                         | Mounting                        | : F-1                     |          |
| Duty cycle                                                                                                                                                                                                                                                                             | : Cont.(S1)                                 | Rotation <sup>1</sup>           | : CCW                     |          |
| Ambient temperature                                                                                                                                                                                                                                                                    | : -20°C to +40°C                            | Starting method                 | : Direct On Line          |          |
| Altitude                                                                                                                                                                                                                                                                               | : 1000 m.a.s.l.                             | Approx. weight <sup>3</sup>     | : 16.5 kg                 |          |
| Design                                                                                                                                                                                                                                                                                 | : A                                         | Moment of inertia (J)           | : 0.0049 kgm <sup>2</sup> |          |
| Output [HP]                                                                                                                                                                                                                                                                            | 2                                           |                                 |                           |          |
| Poles                                                                                                                                                                                                                                                                                  | 2                                           |                                 |                           |          |
| Frequency [Hz]                                                                                                                                                                                                                                                                         | 60                                          |                                 |                           |          |
| Rated voltage [V]                                                                                                                                                                                                                                                                      | 575                                         |                                 |                           |          |
| Rated current [A]                                                                                                                                                                                                                                                                      | 1.94                                        |                                 |                           |          |
| L. R. Amperes [A]                                                                                                                                                                                                                                                                      | 17.2                                        |                                 |                           |          |
| LRC [A]                                                                                                                                                                                                                                                                                | 8.9x(Code K)                                |                                 |                           |          |
| No load current [A]                                                                                                                                                                                                                                                                    | 0.734                                       |                                 |                           |          |
| Rated speed [RPM]                                                                                                                                                                                                                                                                      | 3510                                        |                                 |                           |          |
| Slip [%]                                                                                                                                                                                                                                                                               | 2.50                                        |                                 |                           |          |
| Rated torque [kgfm]                                                                                                                                                                                                                                                                    | 0.414                                       |                                 |                           |          |
| Locked rotor torque [%]                                                                                                                                                                                                                                                                | 220                                         |                                 |                           |          |
| Breakdown torque [%]                                                                                                                                                                                                                                                                   | 330                                         |                                 |                           |          |
| Service factor                                                                                                                                                                                                                                                                         | 1.20                                        |                                 |                           |          |
| Temperature rise                                                                                                                                                                                                                                                                       | 80 K                                        |                                 |                           |          |
| Locked rotor time                                                                                                                                                                                                                                                                      | 25s (cold) 14s (hot)                        |                                 |                           |          |
| Noise level <sup>2</sup>                                                                                                                                                                                                                                                               | 62.0 dB(A)                                  |                                 |                           |          |
| Efficiency (%)                                                                                                                                                                                                                                                                         | 25%                                         |                                 |                           |          |
|                                                                                                                                                                                                                                                                                        | 50%                                         | 84.0                            |                           |          |
|                                                                                                                                                                                                                                                                                        | 75%                                         | 85.5                            |                           |          |
|                                                                                                                                                                                                                                                                                        | 100%                                        | 85.5                            |                           |          |
| Power Factor                                                                                                                                                                                                                                                                           | 25%                                         |                                 |                           |          |
|                                                                                                                                                                                                                                                                                        | 50%                                         | 0.77                            |                           |          |
|                                                                                                                                                                                                                                                                                        | 75%                                         | 0.86                            |                           |          |
|                                                                                                                                                                                                                                                                                        | 100%                                        | 0.91                            |                           |          |
| Bearing type                                                                                                                                                                                                                                                                           | : Drive end 6203 2RS Non drive end 6202 2RS | Foundation loads                |                           |          |
| Sealing                                                                                                                                                                                                                                                                                | : Without Bearing Seal Without Bearing Seal | Max. traction : 35 kgf          |                           |          |
|                                                                                                                                                                                                                                                                                        |                                             | Max. compression : 52 kgf       |                           |          |
| Lubrication interval                                                                                                                                                                                                                                                                   | : -                                         |                                 |                           |          |
| Lubricant amount                                                                                                                                                                                                                                                                       | : -                                         |                                 |                           |          |
| Lubricant type                                                                                                                                                                                                                                                                         | : Mobil Polyrex EM                          |                                 |                           |          |
| Notes                                                                                                                                                                                                                                                                                  |                                             |                                 |                           |          |
| This revision replaces and cancel the previous one, which must be eliminated.<br>(1) Looking the motor from the shaft end.<br>(2) Measured at 1m and with tolerance of +3dB(A).<br>(3) Approximate weight subject to changes after manufacturing process.<br>(4) At 100% of full load. |                                             |                                 |                           |          |
| These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.                                                                                                                                                               |                                             |                                 |                           |          |
| Rev.                                                                                                                                                                                                                                                                                   | Changes Summary                             |                                 | Performed                 | Checked  |
|                                                                                                                                                                                                                                                                                        |                                             |                                 |                           |          |
| Performed by                                                                                                                                                                                                                                                                           |                                             |                                 | Page<br>1 / 2             | Revision |
| Checked by                                                                                                                                                                                                                                                                             |                                             |                                 |                           |          |
| Date                                                                                                                                                                                                                                                                                   | 17/05/2022                                  |                                 |                           |          |

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 14813761


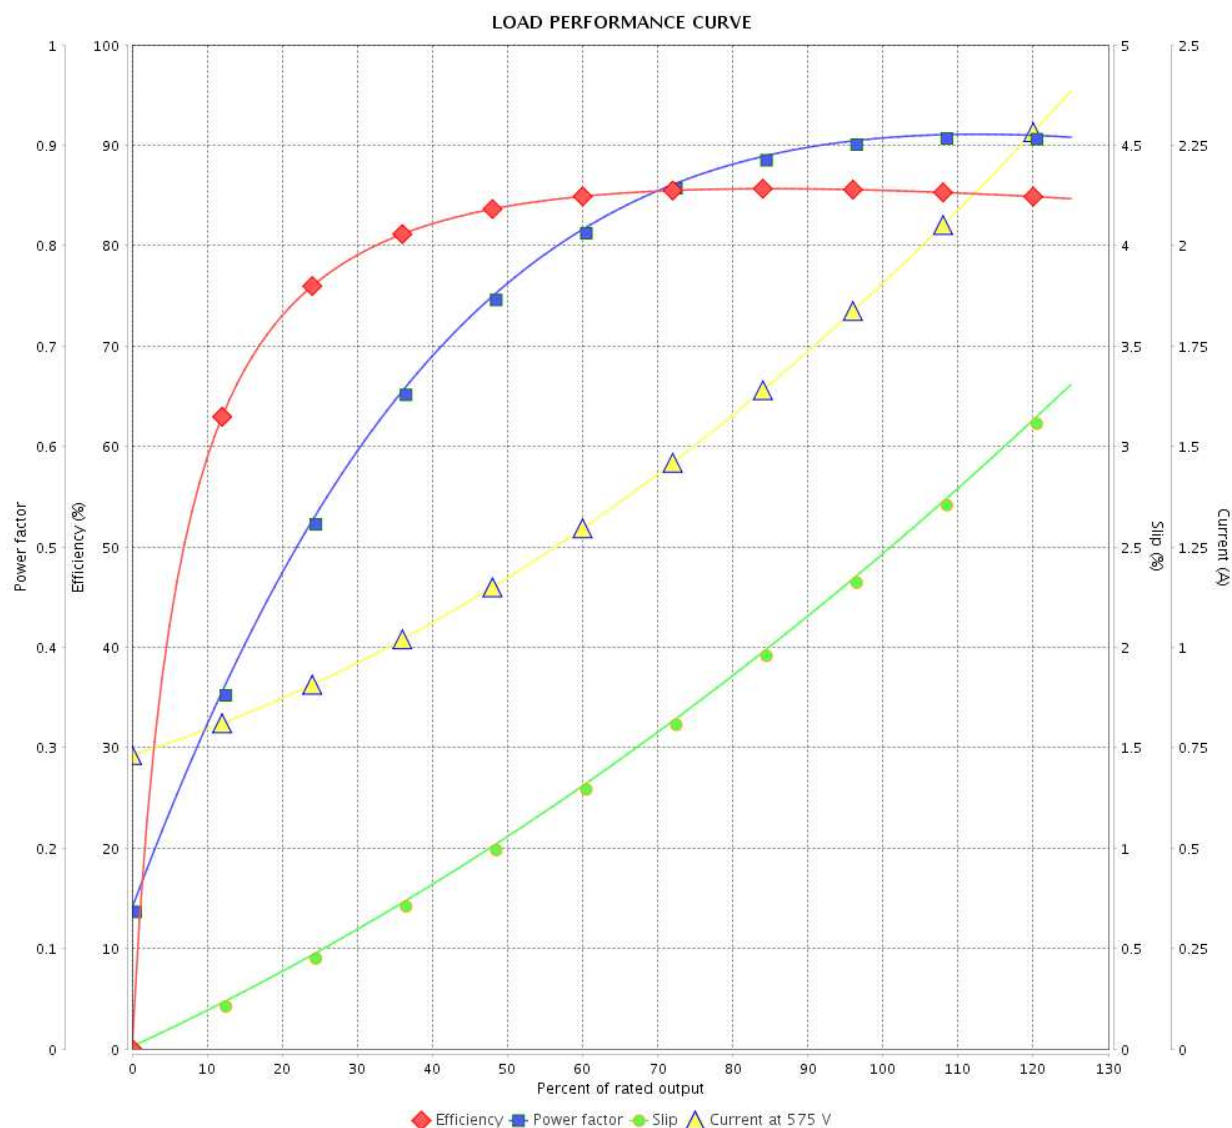


Performance : 575 V 60 Hz 2P

Rated current : 1.94 A  
 LRC : 8.9  
 Rated torque : 0.414 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 330 %  
 Rated speed : 3510 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.20  
 Temperature rise : 80 K  
 Design : A

| Rev.         | Changes Summary |  | Performed | Checked       | Date     |
|--------------|-----------------|--|-----------|---------------|----------|
|              |                 |  |           |               |          |
| Performed by |                 |  |           | Page<br>2 / 2 | Revision |
| Checked by   |                 |  |           |               |          |
| Date         | 17/05/2022      |  |           |               |          |

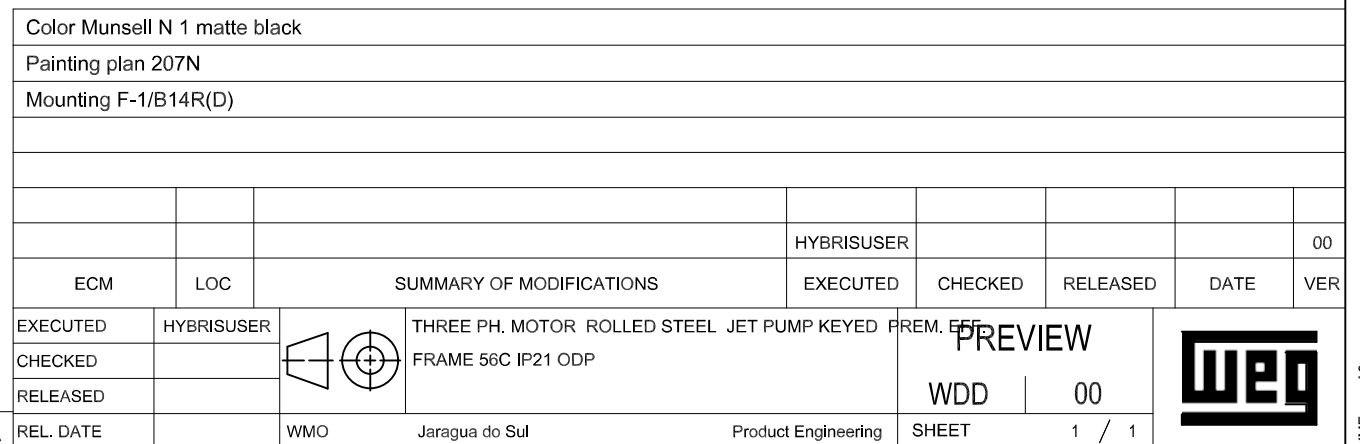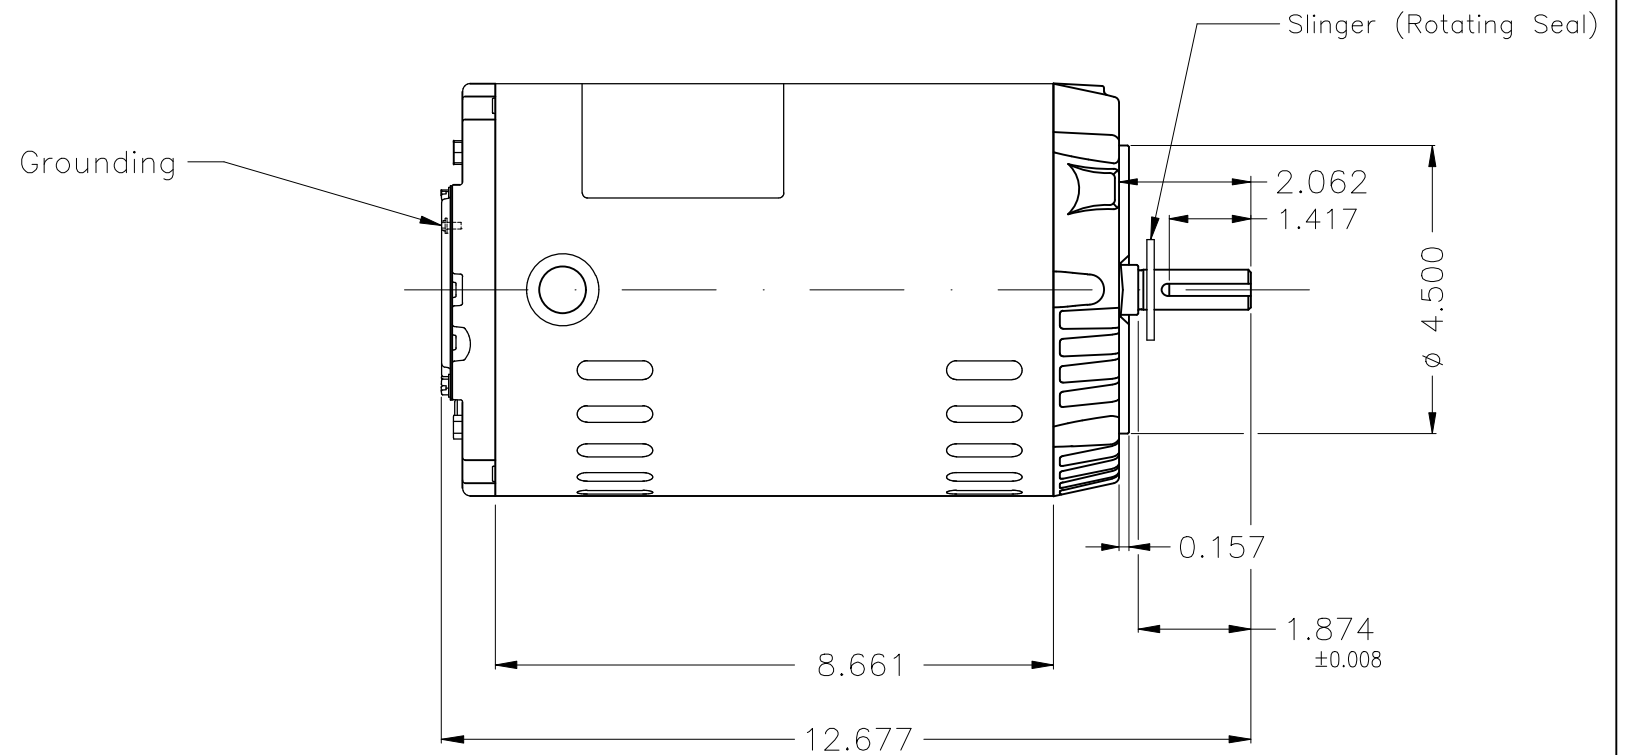

WEG's property. Forbidden reproduction without previous authorization.