

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - Ventilação Premium Efficiency (DOE) Product code : 19074591

Frame	: 56	Locked rotor time	: 20 s (hot) 36 s (cold)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 115/208-230 V	Altitude	: 3280 ft
Rated current	: 6.80/3.76-3.40 A	Protection degree	: IP21
L. R. Amperes	: 54.4/30.1-27.2 A	Cooling method	: IC01 - ODP
LRC	: 8.0	Mounting	: F-1/B3R(D)
No load current	: 2.96/1.28-1.48 A	Rotation ¹	: Both
Rated speed	: 1750 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 2.78 %	Vibration class	: A
Rated torque	: 2.22 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 260 %	Approx. weight ³	: 30.9 lb
Pull up torque	: 220 %	Color	: PRIMER ONLY
Breakdown torque	: 250 %	Design	: N
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0973 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	74.0	79.0	81.8
Power Factor	0.74	0.82	0.86

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type	6204-ZZ	6202-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: -
Max. compression	: -

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1848000013	
Checked by	AUTOMATICO			Page	Rev.
Date	13/05/2026			1 / 2	0

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - Ventilação Premium Efficiency (DOE) Product code : 19074591





Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1848000013	
Checked by	AUTOMATICO			Page	Rev.
Date	13/05/2026			2 / 2	0

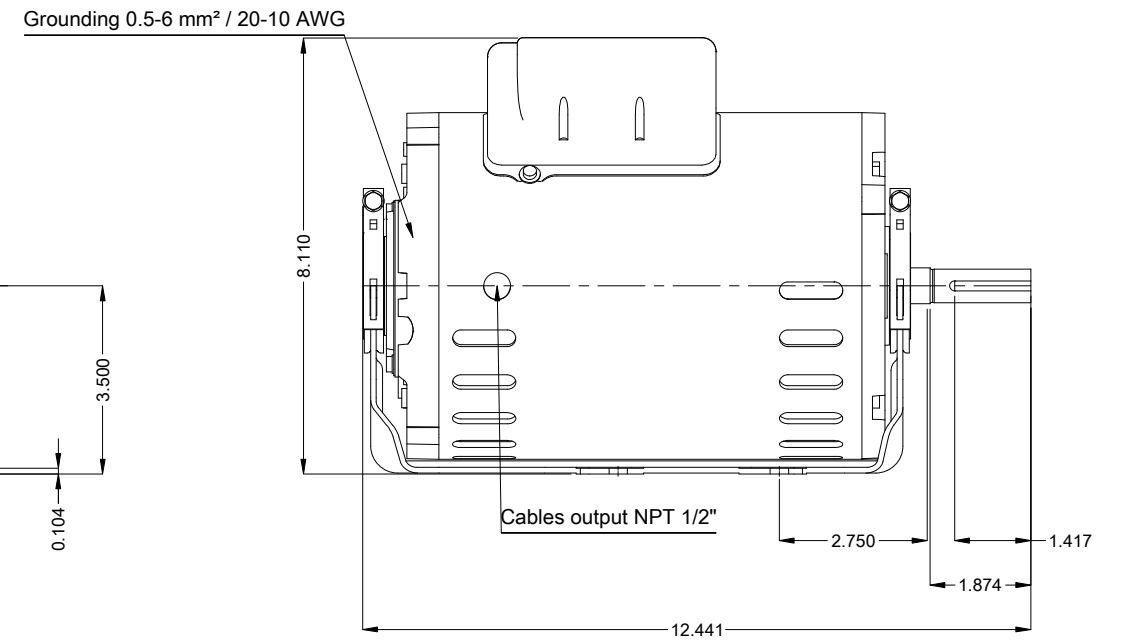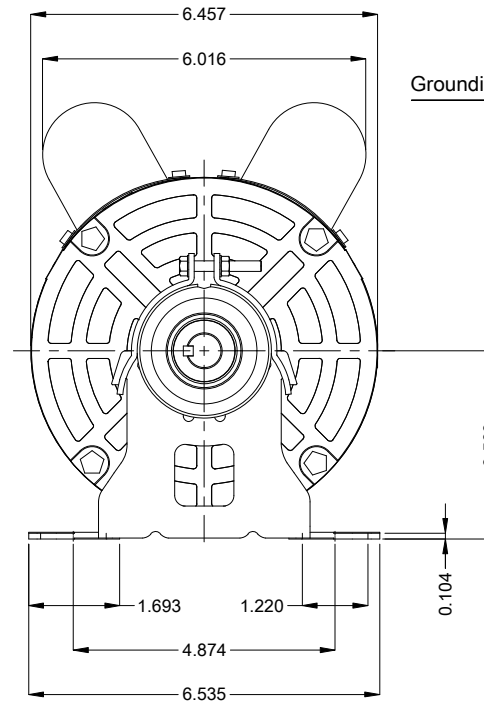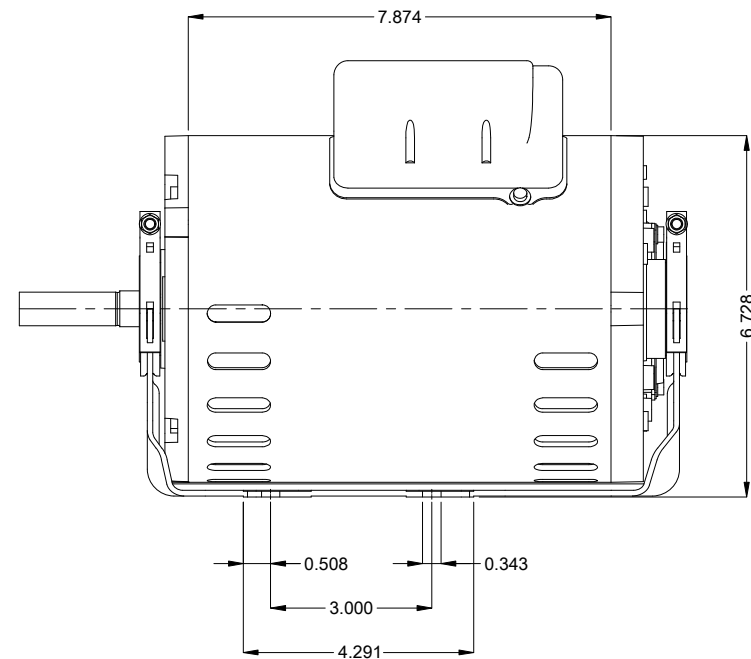

Reinforce the foot with 2 mig welding spots
Phenolic thermal protector - automatic
Mounting MARKET F-1/B3R(D)
Mounting F-1/B3R(D)

0.75 HP 04 Poles 60 Hz										A
V.J. PAMENSKY CANADA INC.										
						Scale			2 : 7	
						PIRWBUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	
EXECUTED	PIRWBUSER		SINGLE PH. MOTOR ROLLED STEEL FAN / EXHAUST PREM. EFF. FRAME 56 IP21 ODP			PREVIEW WDD 00				
CHECKED										
RELEASED										
REL. DATE										