

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Jet Pump - J type Premium Efficiency Three-Phase		Product code : 15366042
Frame : W56J		Cooling method : IC01 - ODP		
Insulation class : F		Mounting : F-1		
Duty cycle : Cont.(S1)		Rotation ¹ : CCW		
Ambient temperature : -20°C to +40°C		Starting method : Direct On Line		
Altitude : 1000 m.a.s.l.		Approx. weight ³ : 6.5 kg		
		Moment of inertia (J) : 0.0006 kgm ²		
Output [HP]		0.5		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		0.703		
L. R. Amperes [A]		5.13		
LRC [A]		7.3x(Code M)		
No load current [A]		0.480		
Rated speed [RPM]		3450		
Slip [%]		4.17		
Rated torque [kgfm]		0.105		
Locked rotor torque [%]		370		
Breakdown torque [%]		400		
Service factor		1.60		
Temperature rise		80 K		
Locked rotor time		43s (cold) 24s (hot)		
Noise level ²		62.0 dB(A)		
Efficiency (%)	25%			
	50%	62.0		
	75%	68.0		
	100%	73.4		
Power Factor	25%			
	50%	0.53		
	75%	0.65		
	100%	0.72		
Bearing type : 6203 2RS		Drive end	Non drive end	Foundation loads
Sealing : Without				Max. traction : 10 kgf
		Bearing Seal	Bearing Seal	Max. compression : 16 kgf
Lubrication interval : -		-	-	
Lubricant amount : -		-	-	
Lubricant type : Mobil Polyrex EM				
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by			Page 1 / 2	Revision
Checked by				
Date	17/05/2022			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Premium
Efficiency Three-Phase

Product code : 15366042

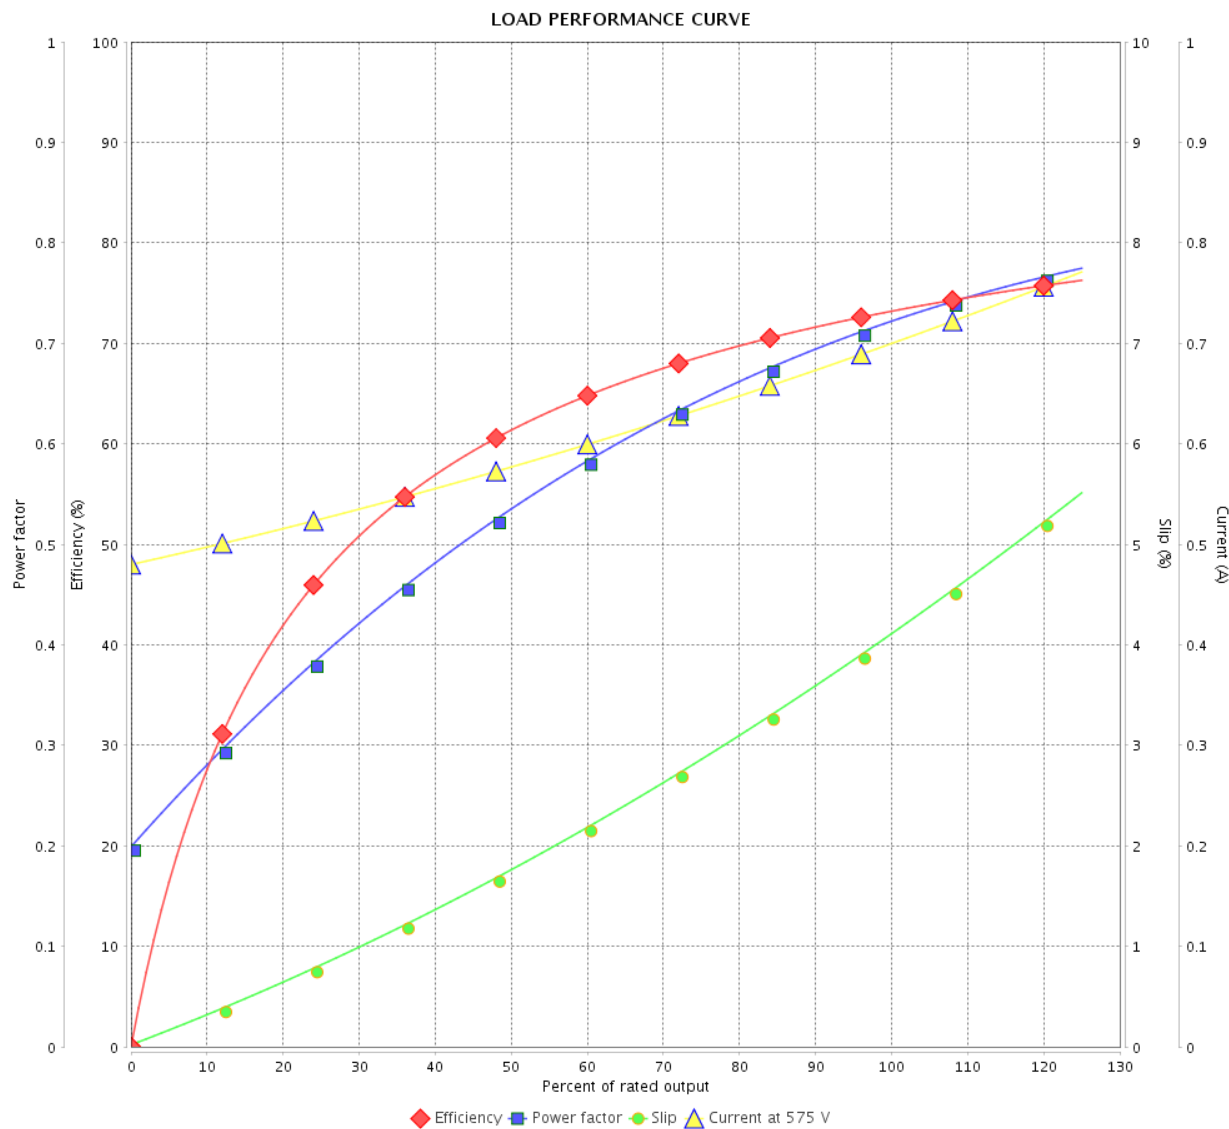

Performance : 575 V 60 Hz 2P

Rated current : 0.703 A
LRC : 7.3
Rated torque : 0.105 kgfm
Locked rotor torque : 370 %
Breakdown torque : 400 %
Rated speed : 3450 rpm

Moment of inertia (J) : 0.0006 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.60
Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					
	17/05/2022				

