

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JP Pump High Efficiency Three-Phase Product code : 19165936

Frame	: 284/6JP	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 40 HP (30 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208 V	Altitude	: 1000 m.a.s.l.
Rated current	: 104 A	Protection degree	: IP23
L. R. Amperes	: 645 A	Cooling method	: IC01 - ODP
LRC	: 6.2x(Code G)	Mounting	: W-6
No load current	: 31.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3545 rpm	Noise level ²	: 73.0 dB(A)
Slip	: 1.53 %	Starting method	: Direct On Line
Rated torque	: 8.19 kgfm	Approx. weight ³	: 163 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 220 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0803 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	91.0	91.7	91.7	Max. traction	: 0 kgf
Power Factor	0.00	0.77	0.85	0.87	Max. compression	: 0 kgf

	Drive end	Non drive end
Bearing type	: 6311 Z C3	6211 Z C3
Sealing	: Without Bearing Seal	Without Bearing Seal
Lubrication interval	: 11517 h	14226 h
Lubricant amount	: 18 g	11 g
Lubricant type	Mobil Polyrex EM	

Notes

Apto a operar a 1000 m de altitude, 40°C de temperatura ambiente, conjugado da carga de 8.08 kgfm e fator de serviço de 1.15.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	14/07/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JP Pump High Efficiency
Three-Phase

Product code : 19165936


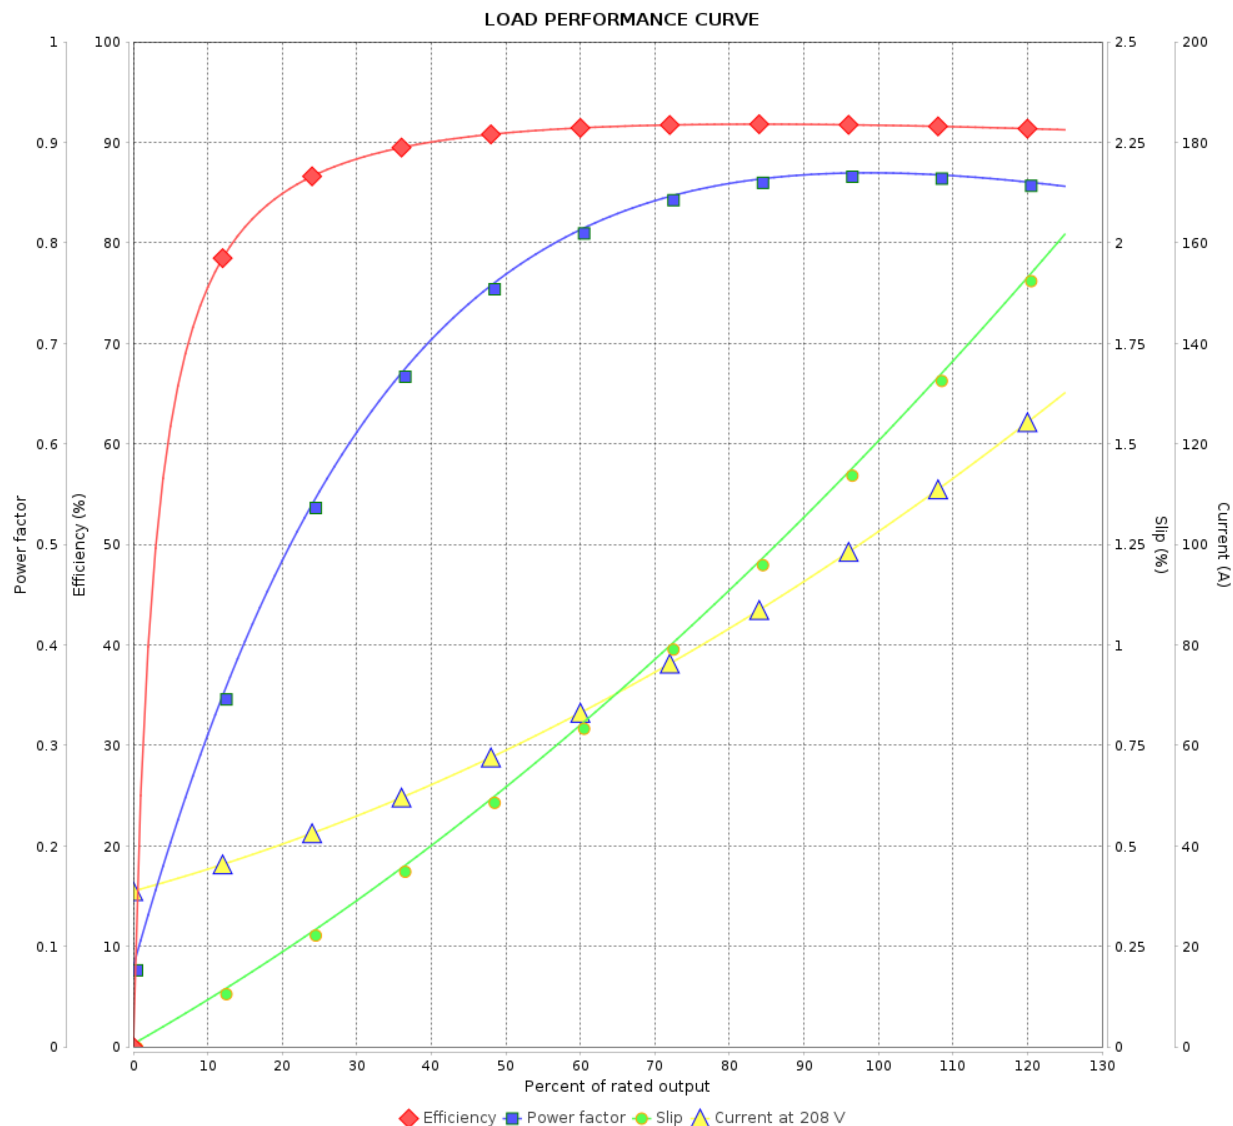


Performance : 208 V 60 Hz 2P

Rated current : 104 A
LRC : 6.2
Rated torque : 8.19 kgfm
Locked rotor torque : 220 %
Breakdown torque : 220 %
Rated speed : 3545 rpm

Moment of inertia (J) : 0.0803 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

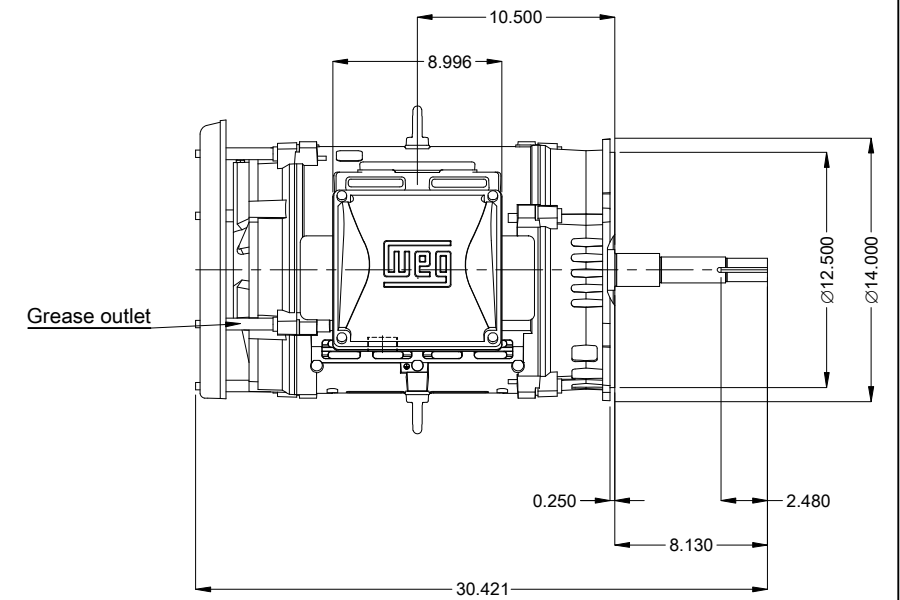

40 HP 02 Poles 60 Hz										A	
						Scale				1 : 10	
						HYBRISUSER				00	
ECM		LOC		SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W40 PUMP JP HIGH EFF. FRAME 284/6JP IP23 ODP				PREVIEW WDD 00				
CHECKED											
RELEASED											
REL. DATE											
						SHEET		1 / 1			