DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line	: W40 JP Pump High Efficiency Three-Phase	Product code :	19165936

Frame	: 284/6JP	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 40 HP (30 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208 V	Altitude	: 1000 m.a.s.l.
Rated current	: 104 A	Protection degree	: IP23
L. R. Amperes	: 645 A	Cooling method	: IC01 - ODP
LRC	: 6.2x(Code G)	Mounting	: W-6
No load current	: 31.0 A	Rotation[1]	: Both (CW and CCW)
Rated speed	: 3545 rpm	Noise level[2]	: 73.0 dB(A)
Slip	: 1.53 %	Starting method	: Direct On Line
Rated torque	: 8.19 kgfm	Approx. weight[3]	: 163 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 220 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0803 kgm²		
Design	: B		

Output	25%	50%	75%	100%
Efficiency (%)	0.000	91.0	91.7	91.7
Power Factor	0.00	0.77	0.85	0.87

Foundation loads

Max. traction	: 0 kgf
Max. compression	: 0 kgf

		Drive end	Non drive end
Bearing type	:	6311 Z C3	6211 Z C3
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	11517 h	14226 h
Lubricant amount	:	18 g	11 g
Lubricant type	:	Mobil Polyrex EM	

Notes
Apto a operar a 1000 m de altitude, 40°C de temperatura ambiente, conjugado da carga de 8.08 kgfm e fator de serviço de 1.15.

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/07/2026		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump High Efficiency Three-Phase

Product code : 19165936

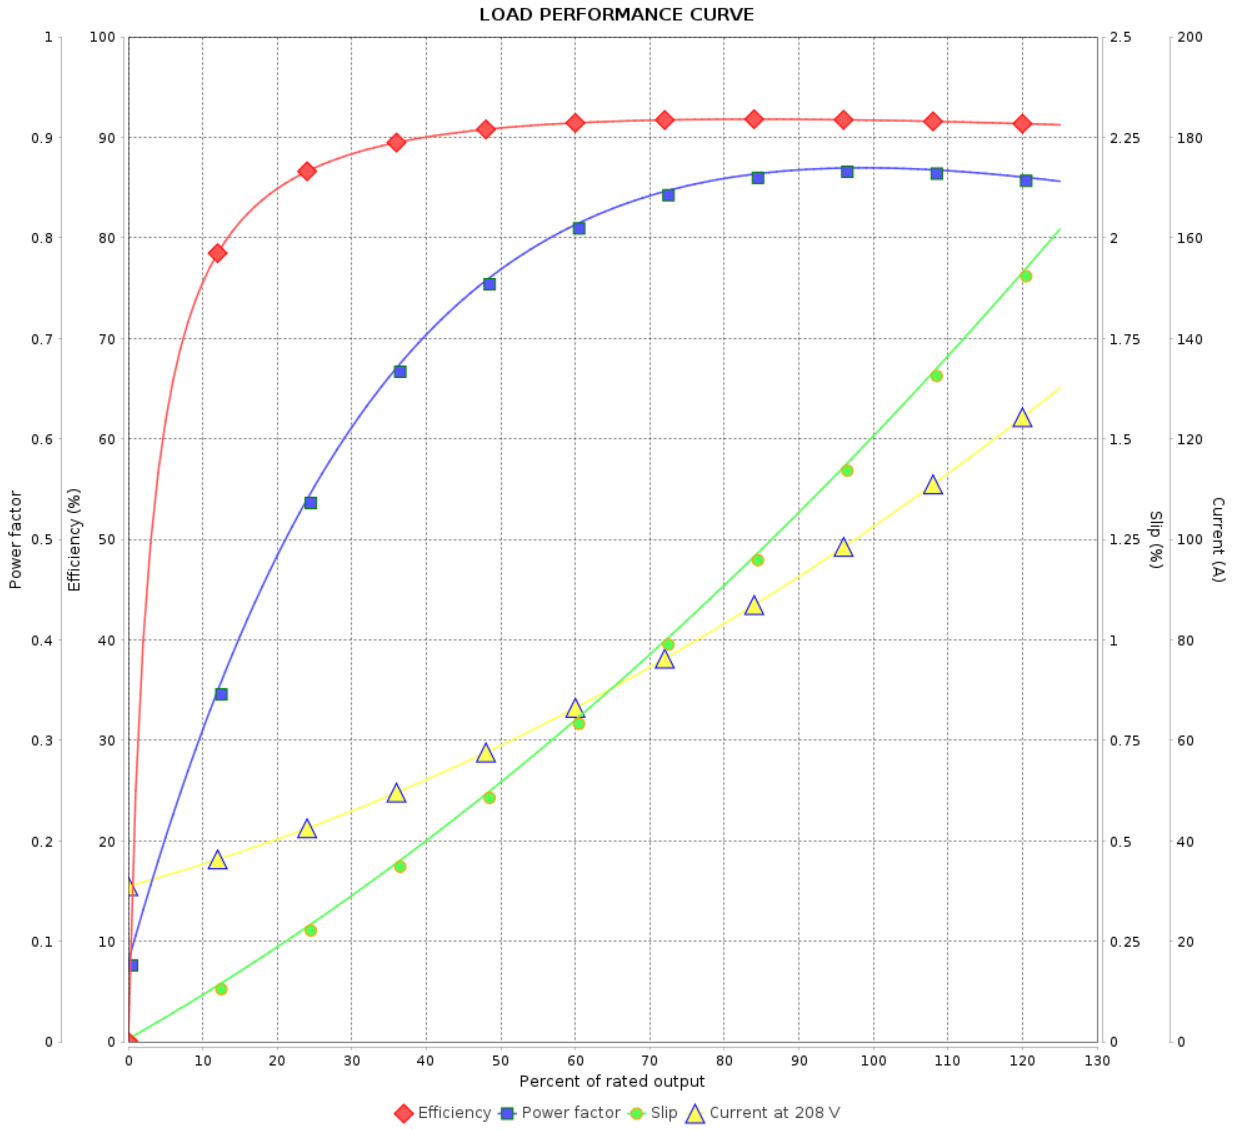


Performance	: 208 V 60 Hz 2P


Rated current	: 104 A	Moment of inertia (J)	: 0.0803 kgm²
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 8.19 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.15
Breakdown torque	: 220 %	Temperature rise	: 80 K
Rated speed	: 3545 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	14/07/2026		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

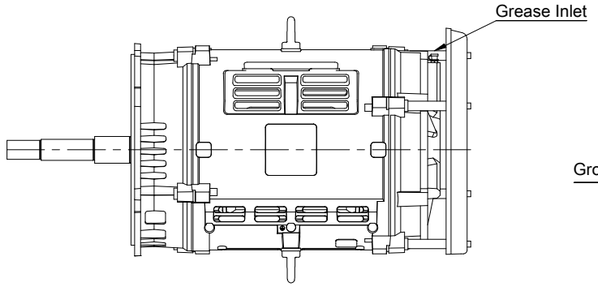


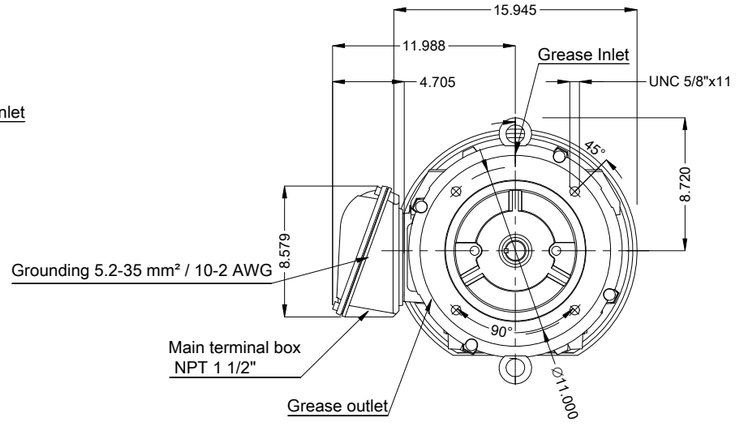

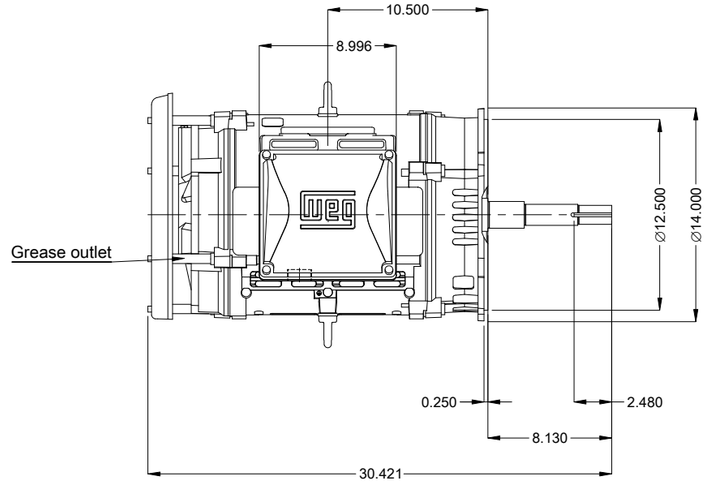

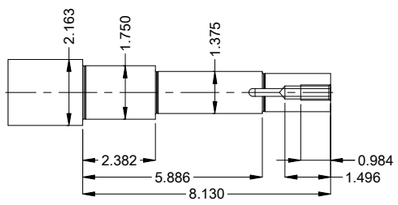

DE Shaft End



EUNC 1/2"-13 WEG WPR-7309

With drip cover
Color RAL 3002
Painting plan 203A
Mounting NEMA W-6
Mounting V18

40 HP 02 Poles 60 Hz — A

Scale 1 : 10

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W40 PUMP JP HIGH EFF.
FRAME 284/6JP IP23 ODP

PREVIEW
WDD 00
SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.