

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 13500626

Frame	: 447/9T	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 300 HP (220 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 460 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 330 A	Protection degree	: IP55
	: 6.5x(Code G)	Cooling method	: IC411 - TEFC
Rated speed	: 1780 rpm	Mounting	: F-1
Rated torque	: 122 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 75.0 dB(A)
Service factor	: 1.15	Starting method	: Direct On Line
Moment of inertia (J)	: 3.77 kgm ²	Approx. weight ³	: 1299 kg
Design	: A		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	95.8	96.2	96.2	Max. traction	: 2025 kgf
Power Factor	0.00	0.77	0.84	0.87	Max. compression	: 3324 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	NU-322 C3	6319 C3
Sealing	:	WSeal	WSeal
Lubrication interval	:	4000 h	8000 h
Lubricant amount	:	60 g	45 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	28/05/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 13500626

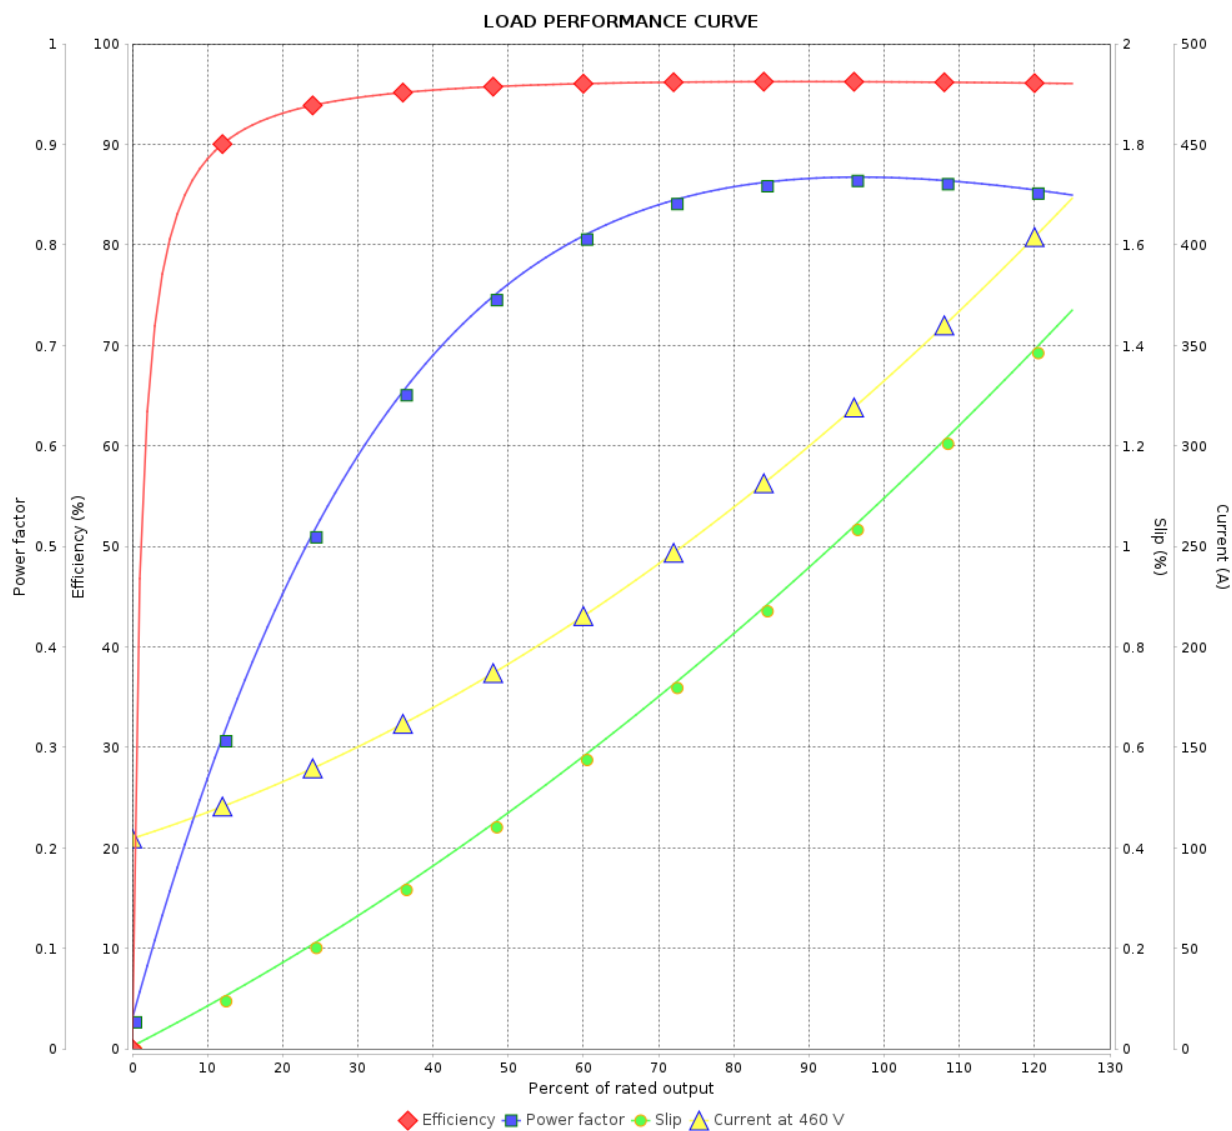

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					
	28/05/2026				

</