

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase Product code : 15860076

Frame	: 364/5JP	Locked rotor time	: 25s (cold) 14s (hot)
Output	: 75 HP (55 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 68.4 A	Protection degree	: IP23
L. R. Amperes	: 465 A	Cooling method	: IC01 - ODP
LRC	: 6.8x(Code G)	Mounting	: F-1
No load current	: 24.4 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1780 rpm	Noise level ²	: 69.0 dB(A)
Slip	: 1.11 %	Starting method	: Direct On Line
Rated torque	: 30.6 kgfm	Approx. weight ³	: 360 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 260 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.7059 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	94.5	95.0	95.0	Max. traction	: 714 kgf
Power Factor	0.73	0.82	0.85	Max. compression	: 1074 kgf

	Drive end	Non drive end
Bearing type	: 6314 C3	: 6212 Z C3
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 27 g	: 13 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	30/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 15860076

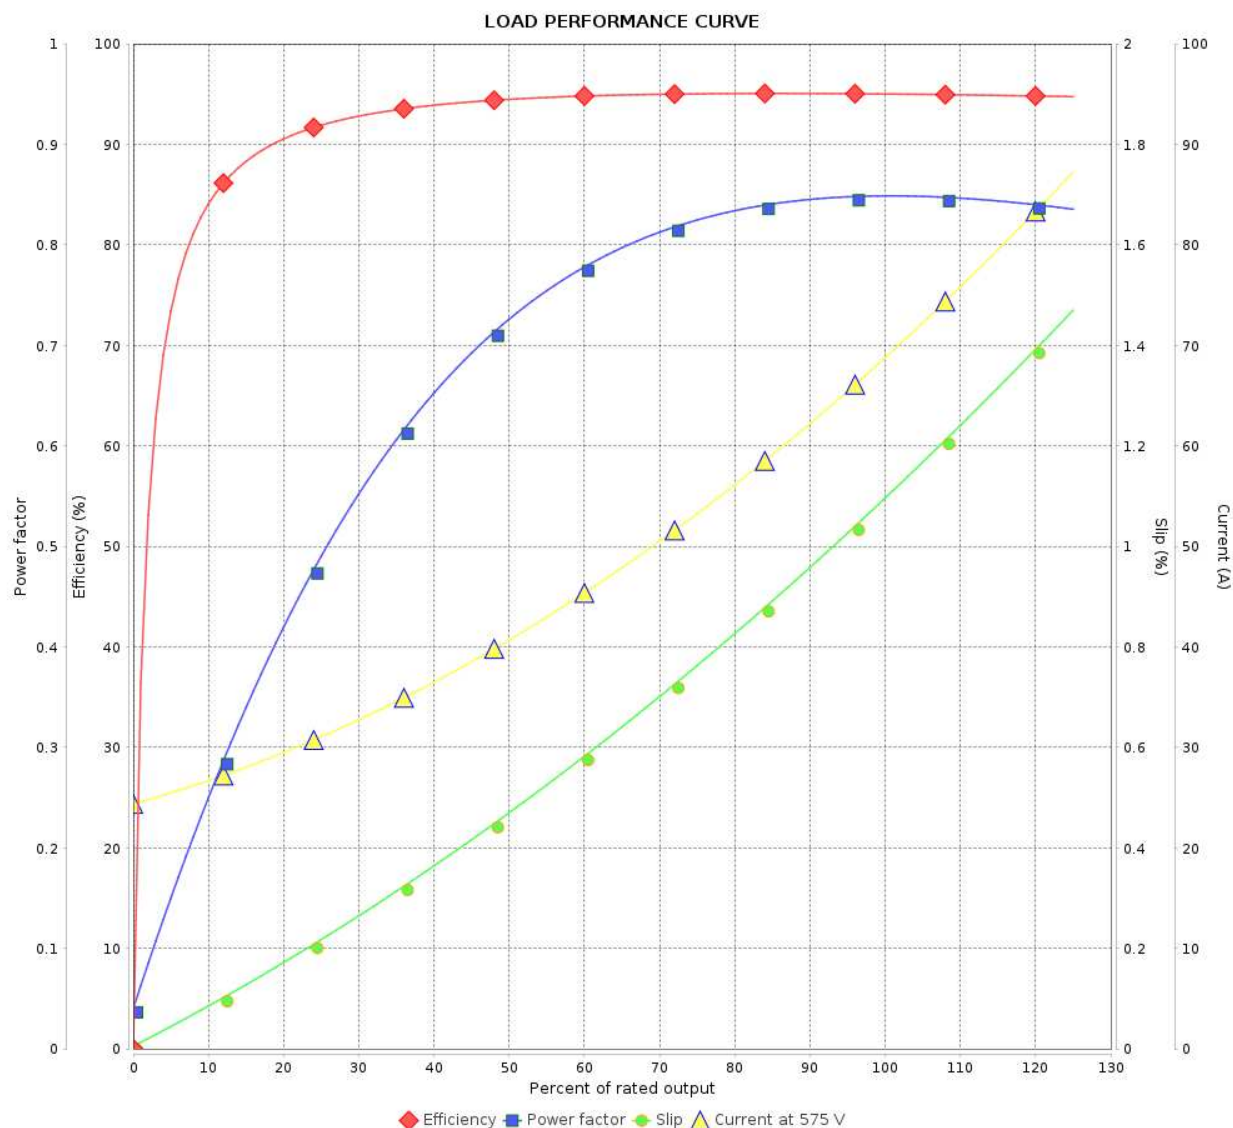


Performance : 575 V 60 Hz 4P

Rated current : 68.4 A
LRC : 6.8
Rated torque : 30.6 kgfm
Locked rotor torque : 220 %
Breakdown torque : 260 %
Rated speed : 1780 rpm

Moment of inertia (J) : 0.7059 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

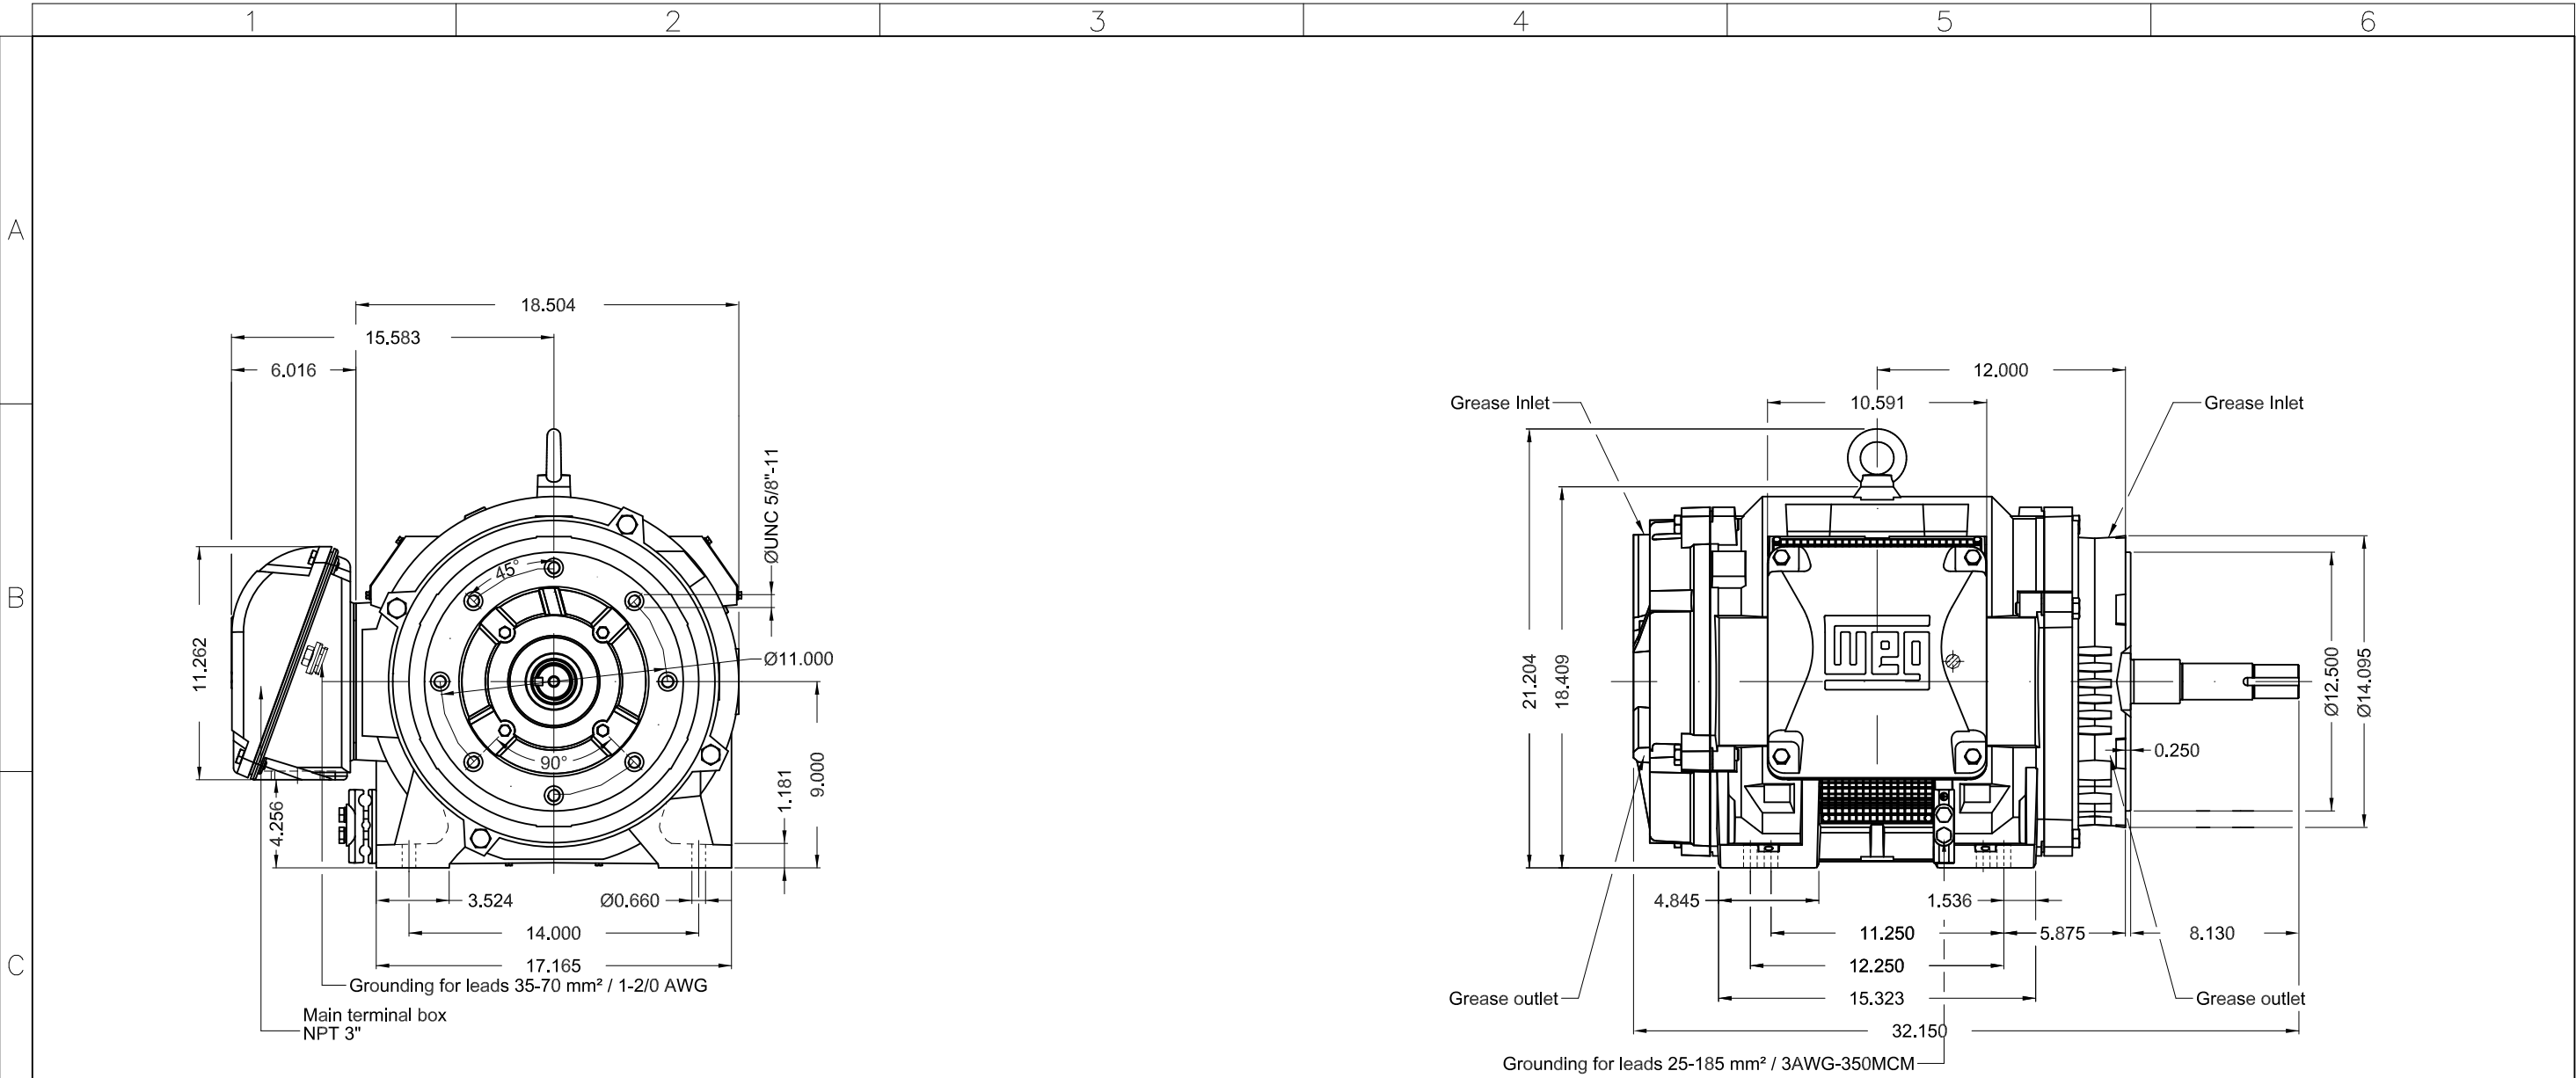

D												
E	75 HP 04 Poles 60 Hz A											
	1:8											
	HYBRISUSER 00											
	ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER	
	EXECUTED	HYBRISUSER					THREE PH. MOTOR W40 CLOSE COUPLED PUMP JP TYPE NEMA 3P/4P/5P FRAME 364/5JP IP23 ODP				PREVIEW WDD 00 WEG	
	CHECKED											
	RELEASED											
	REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1					
	Color RAL 5009											
	Painting plan 203A											
Mounting NEMA F-1												
Mounting B34R(D)												