

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel 00022 Single-Phase Product code : 18463442

Frame	: 56	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 115/230 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 10.6/5.30 A	Protection degree	: IP55
	: 6.4x(Code M)	Cooling method	: IC411 - TEFC
Rated speed	: 1745 rpm	Mounting	: F-1
Rated torque	: 0.312 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 54.0 dB(A)
Service factor	: 1.15	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0033 kgm ²	Approx. weight ³	: 14.3 kg
Design	: N		

Output	50%	75%	100%	Foundation loads
Efficiency (%)	57.0	65.0	68.5	Max. traction
Power Factor	0.47	0.58	0.67	Max. compression

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	V'Ring	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	11/05/2026			


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage





Customer : _____

Product line : Rolled Steel 00022 Single-Phase Product code : 18463442

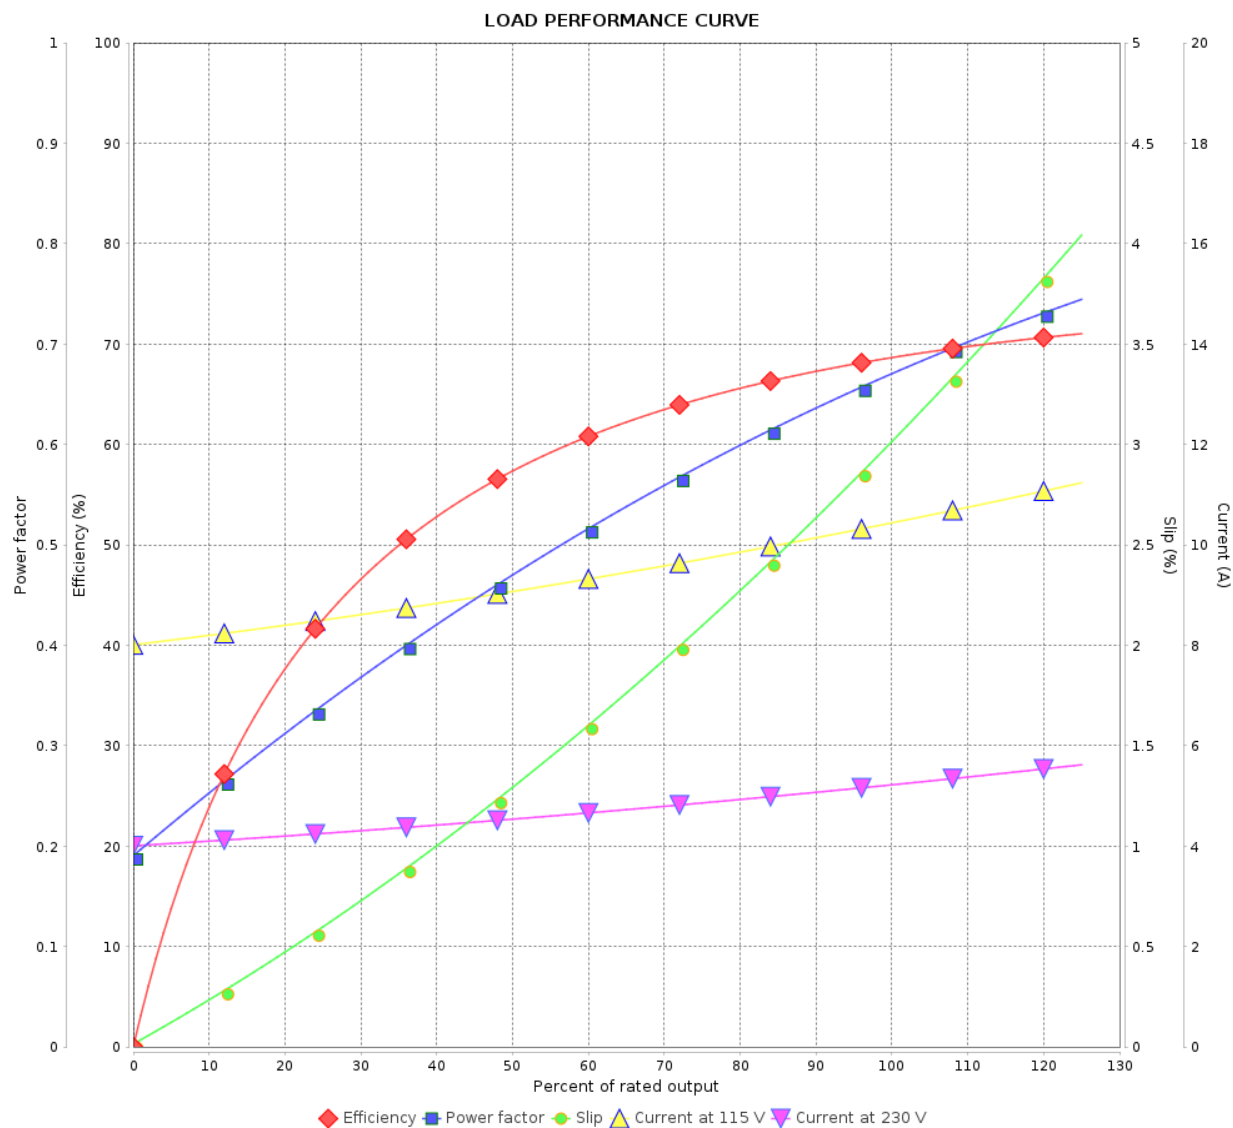

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	11/05/2026				
			Page 2 / 2	Revision	

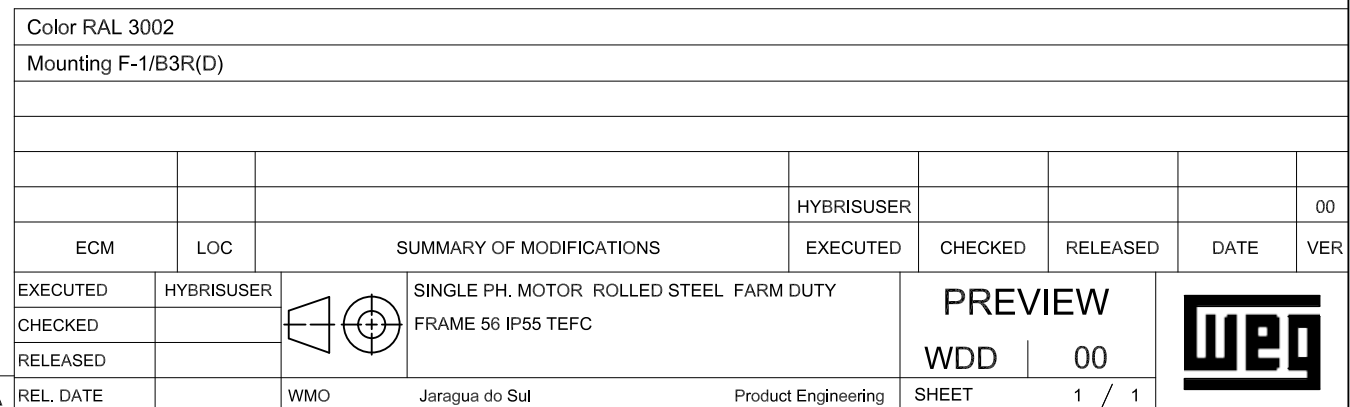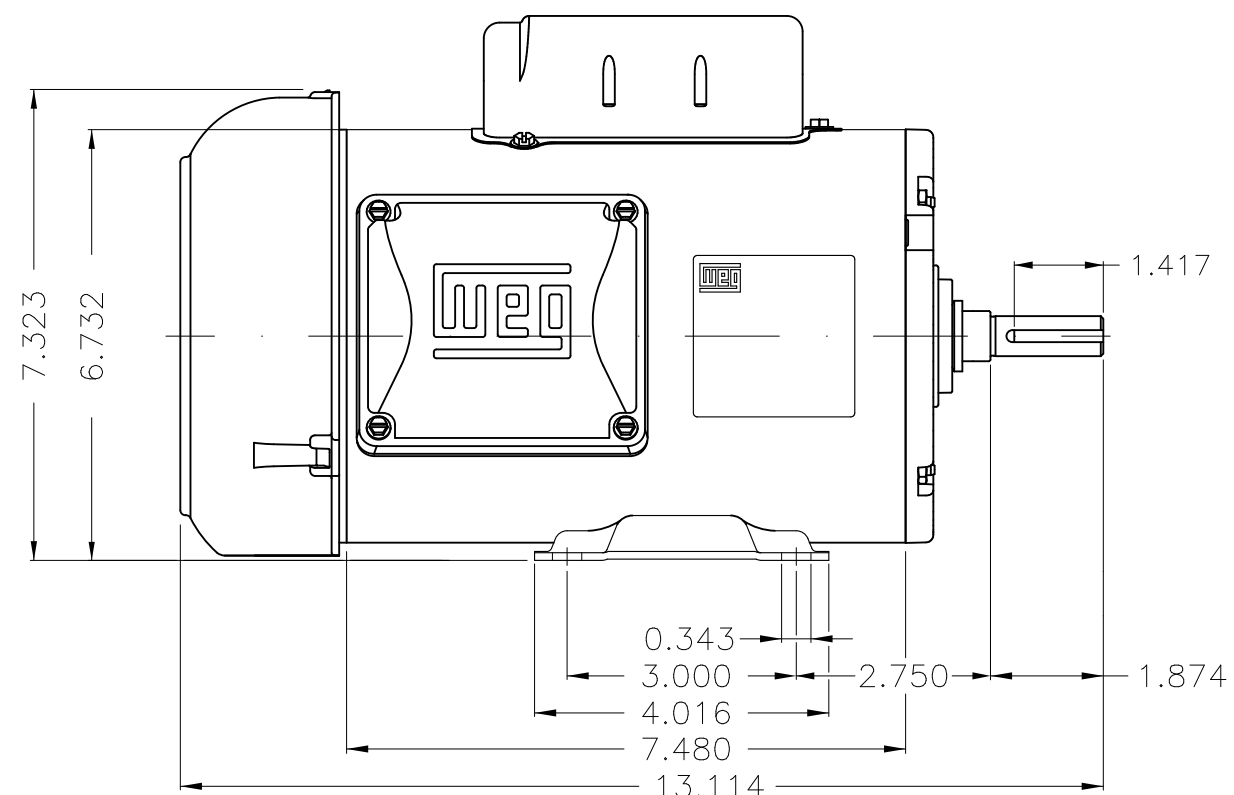

0.75 HP 04 Poles 60 Hz

	A
--	---

	WMO
--	-----

Jaragua do Sul

Product Engineering

	SHEET
--	-------

1 / 1



Dimensions in inches

AME	A3
-----	----