

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: NEMA Premium Efficiency Three-Phase	Product code : 12682575	
Frame		: 143/5T	Cooling method : IC01 - ODP	
Insulation class		: F	Mounting : F-1	
Duty cycle		: Cont.(S1)	Rotation ¹ : Both (CW and CCW)	
Ambient temperature		: -20°C to +40°C	Starting method : Direct On Line	
Altitude		: 1000 m.a.s.l.	Approx. weight ³ : 18.0 kg	
Design		: B	Moment of inertia (J) : 0.0049 kgm ²	
Output [HP]		2		
Poles		4		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		2.15		
L. R. Amperes [A]		16.6		
LRC [A]		7.7x(Code K)		
No load current [A]		1.10		
Rated speed [RPM]		1740		
Slip [%]		3.33		
Rated torque [kgfm]		0.834		
Locked rotor torque [%]		260		
Breakdown torque [%]		320		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		30s (cold) 17s (hot)		
Noise level ²		52.0 dB(A)		
Efficiency (%)	25%	85.2		
	50%	85.5		
	75%	86.5		
	100%	86.5		
Power Factor	25%	0.36		
	50%	0.61		
	75%	0.74		
	100%	0.81		
Bearing type		: Drive end 6205 ZZ Non drive end 6203 ZZ	Foundation loads	
Sealing		: Without Without Bearing Seal Bearing Seal	Max. traction : 67 kgf	
Lubrication interval		: - -	Max. compression : 85 kgf	
Lubricant amount		: - -		
Lubricant type		: Mobil Polyrex EM		
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	13/05/2022		1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 12682575

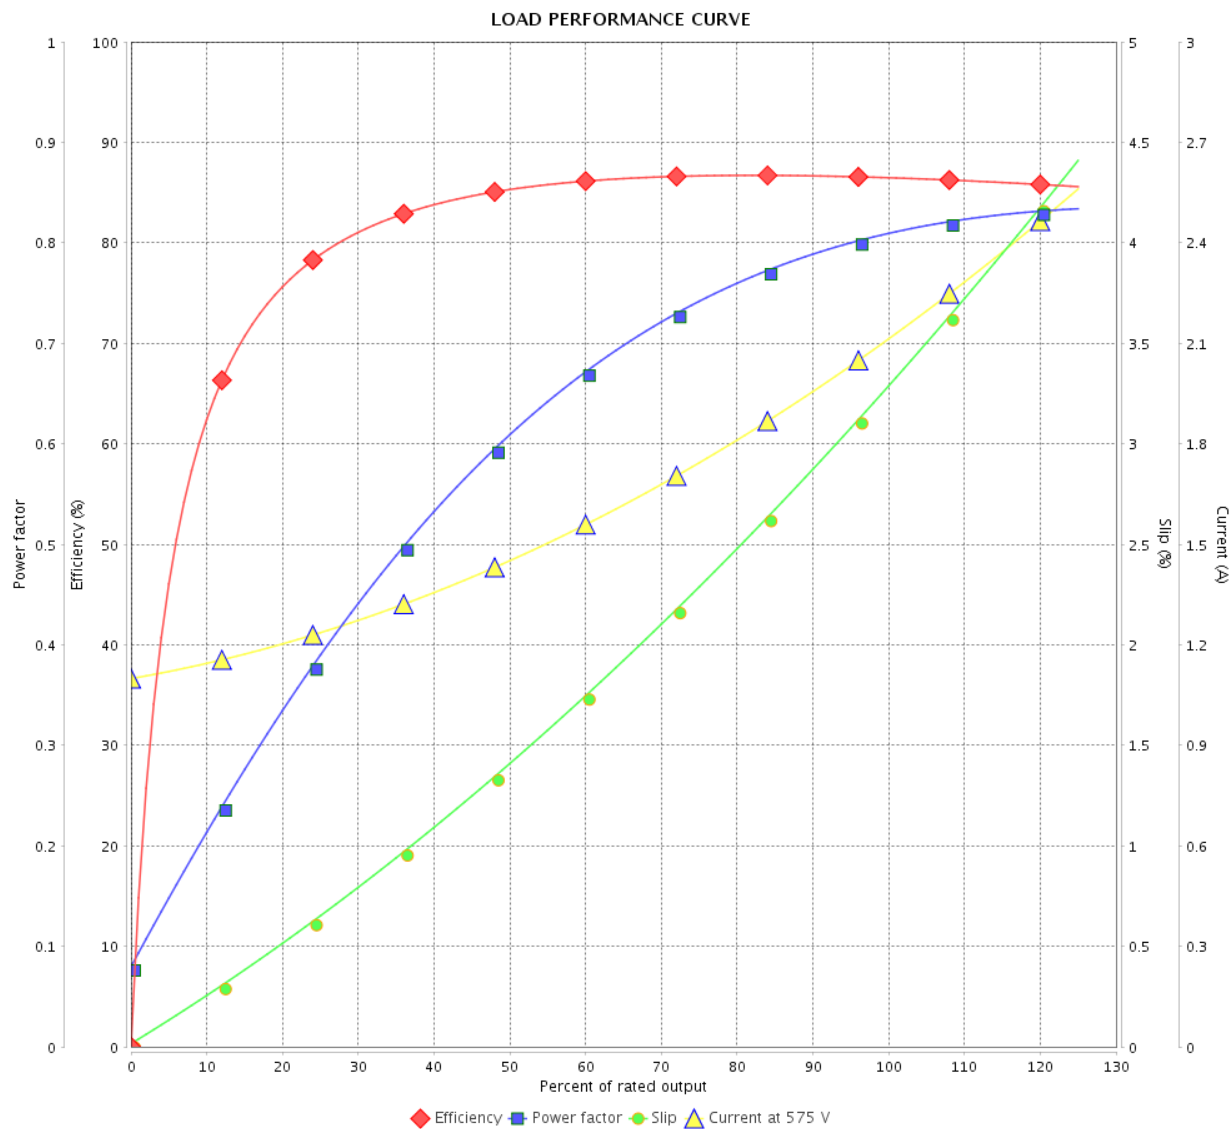

Performance : 575 V 60 Hz 4P

Rated current : 2.15 A
LRC : 7.7
Rated torque : 0.834 kgfm
Locked rotor torque : 260 %
Breakdown torque : 320 %
Rated speed : 1740 rpm

Moment of inertia (J) : 0.0049 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

