DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase

Product code : 14514182

Frame	: 213/5T
Output	: 7.5 HP (5.5 kW)
Poles	: 4
Frequency	: 60 Hz
Rated voltage	: 230/460 V
Rated current	: 18.4/9.18 A
L. R. Amperes	: 130/65.2 A
LRC	: 7.1x(Code H)
No load current	: 7.80/3.90 A
Rated speed	: 1765 rpm
Slip	: 1.94 %
Rated torque	: 3.08 kgfm
Locked rotor torque	: 220 %
Breakdown torque	: 280 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.0566 kgm²
Design	: B

Locked rotor time	: 36s (cold) 20s (hot)
Temperature rise	: 80 K
Duty cycle	: Cont.(S1)
Ambient temperature	: -20°C to +40°C
Altitude	: 1000 m.a.s.l.
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: F-1
Rotation[1]	: Both (CW and CCW)
Noise level[2]	: 58.0 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 70.0 kg

Output	50%	75%	100%
Efficiency (%)	89.5	91.0	91.7
Power Factor	0.66	0.76	0.82

Foundation loads

Max. traction	: 116 kgf
Max. compression	: 203 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
10.2	9.0	8.4	4.8	3.6	2.4	1.7

		Drive end	Non drive end
Bearing type	:	6308 ZZ	6207 ZZ
Sealing	:	V'Ring	Lip Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	00088	

Notes
USABLE @208V 19.9A SF 1.15 SFA 22.9A

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/08/2026		1 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Brake information

Voltage: 440-480 V
Brake Torque: 8.15 kgfm

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/08/2026		2 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase

Product code : 14514182

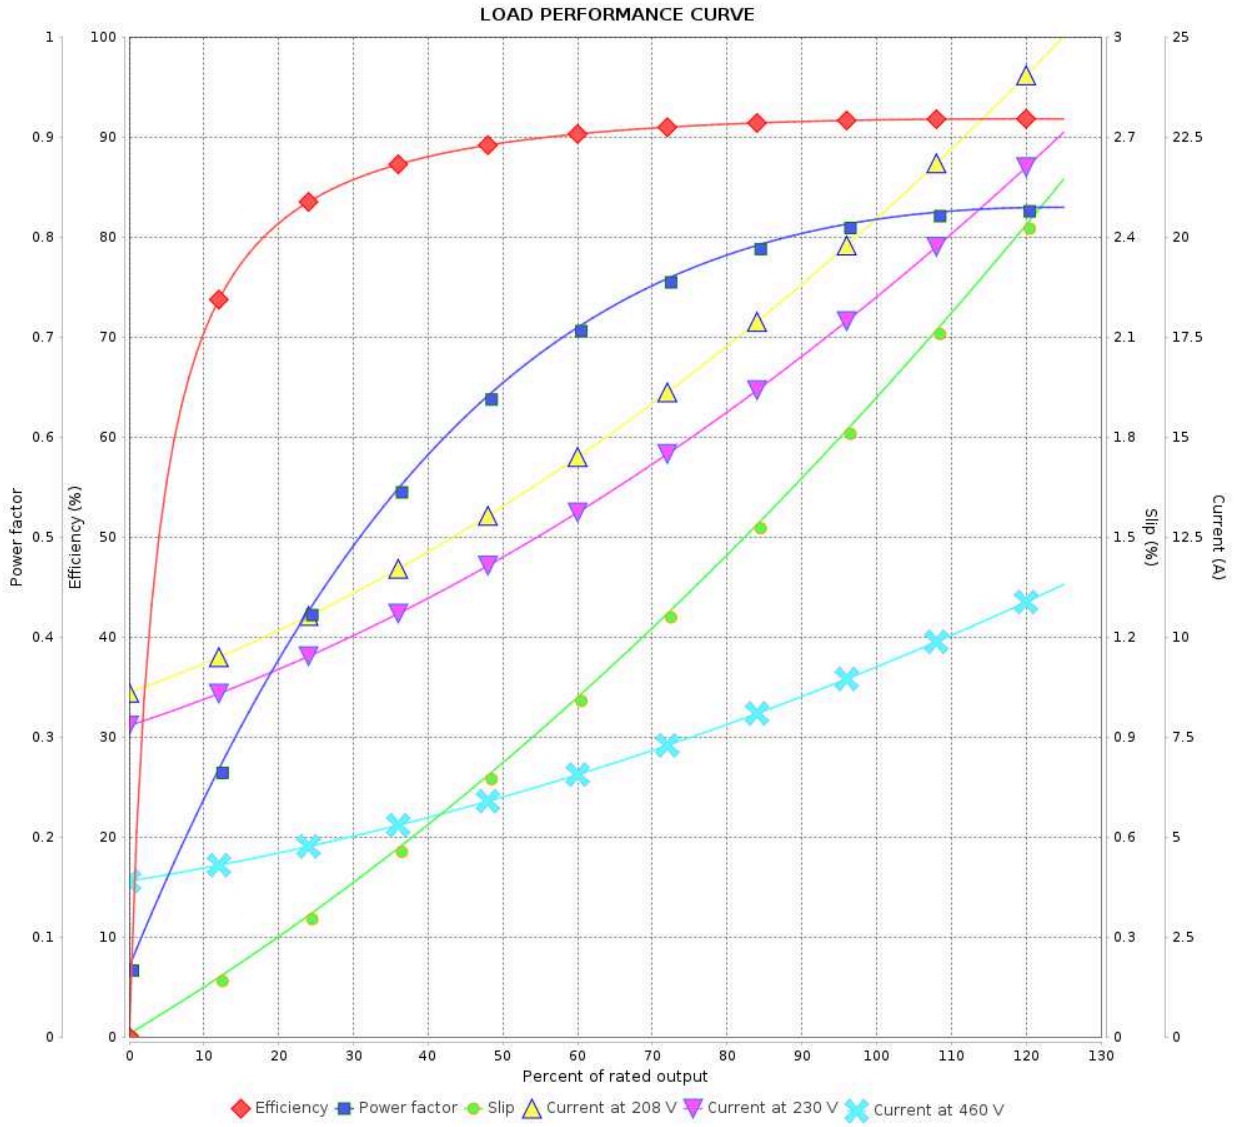


Performance	: 230/460 V 60 Hz 4P		
Rated current	: 18.4/9.18 A	Moment of inertia (J)	: 0.0566 kgm²
LRC	: 7.1	Duty cycle	: Cont.(S1)
Rated torque	: 3.08 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1765 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	14/08/2026		3 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

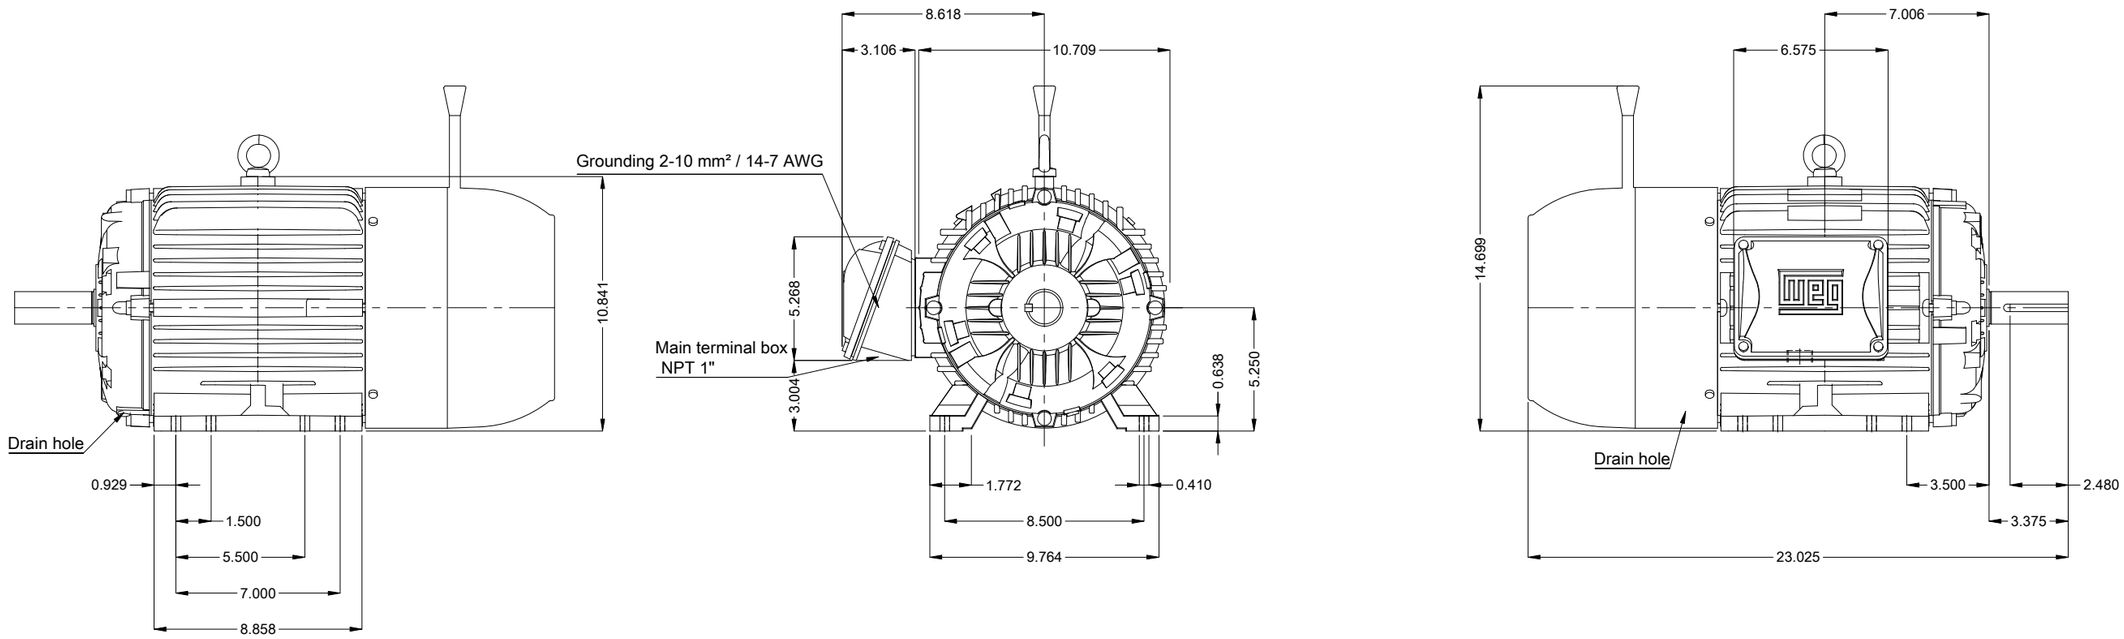

Break size 16 (80 Nm)
Brake voltage 440-480 V
Color RAL 5009
Painting plan 207A
Mounting NEMA F-1
Mounting B3R(D)

DE Shaft End



7.5 HP 04 Poles 60 Hz | A

V.J. PAMENSKY CANADA INC.

Scale 2 : 13

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			PIRWBUSER				00

EXECUTED	PIRWBUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W22 BRAKE MOTOR NEMA PREM. EFF.
FRAME 213/5T IP55 TEFC

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.