

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 High Efficiency Three-Phase Product code : 16825967

Frame	: 444/5T	Locked rotor time	: 36s (cold) 20s (hot)
Output	: 150 HP (110 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 140 A	Protection degree	: IP23
L. R. Amperes	: 854 A	Cooling method	: IC01 - ODP
LRC	: 6.1x(Code G)	Mounting	: F-1
No load current	: 45.6 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1775 rpm	Starting method	: Direct On Line
Slip	: 1.39 %	Approx. weight ³	: 619 kg
Rated torque	: 61.3 kgfm		
Locked rotor torque	: 150 %		
Breakdown torque	: 200 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 1.78 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	94.5	95.0	95.0	Max. traction	: 773 kgf
Power Factor	0.74	0.80	0.83	Max. compression	: 1372 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6319 C3	6212 Z C3
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	45 g	13 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	14/07/2026			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :




Product line : W40 High Efficiency Three-Phase Product code : 16825967

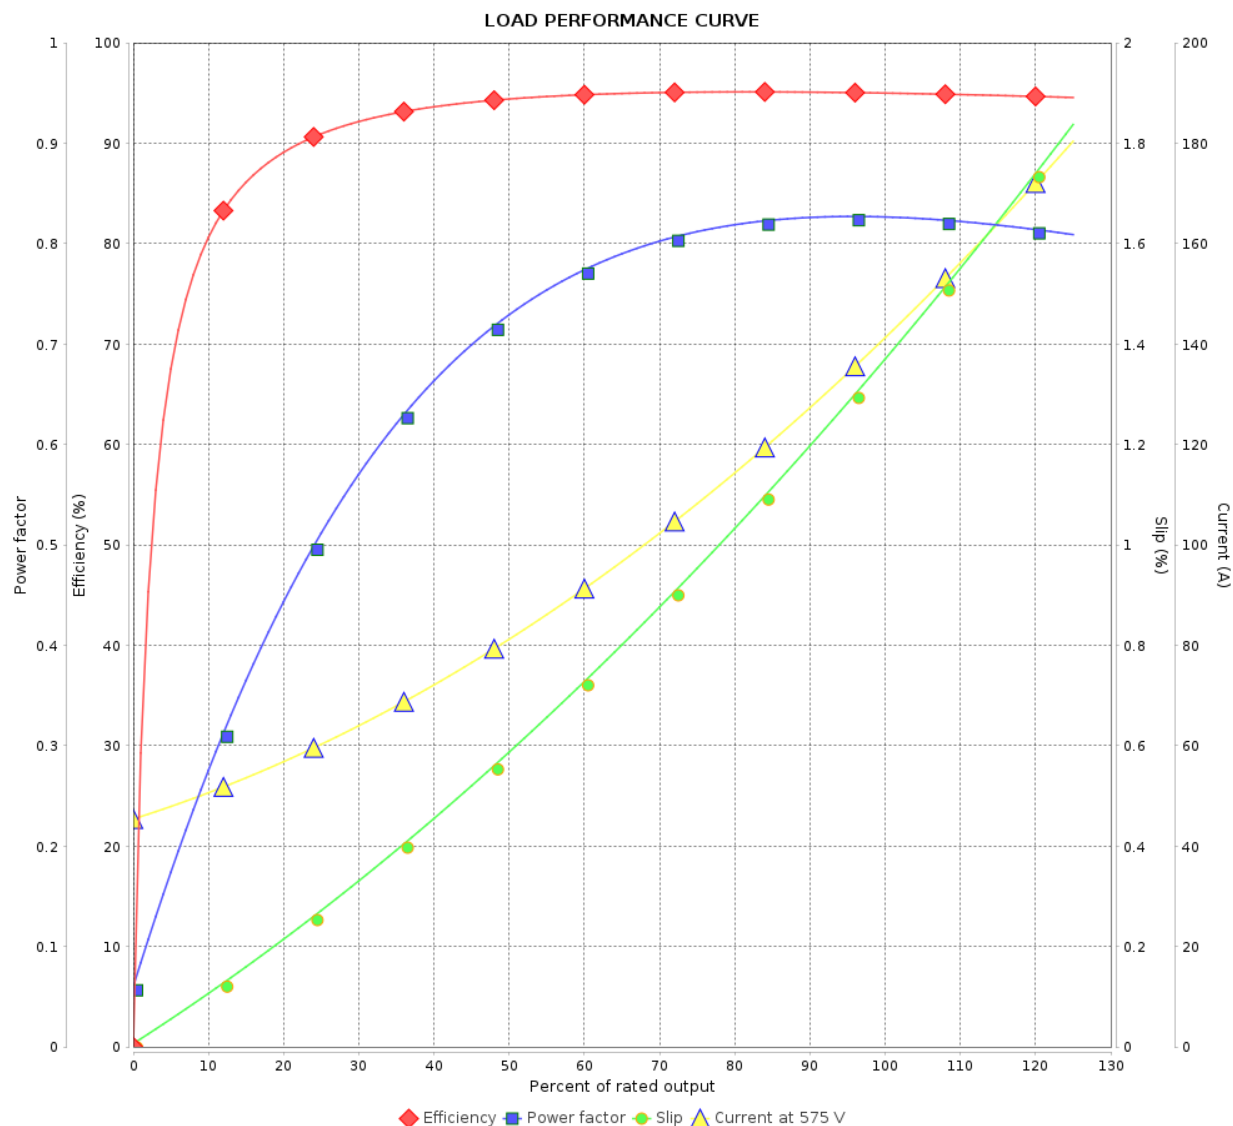


Performance : 575 V 60 Hz 4P

Rated current	: 140 A	Moment of inertia (J)	: 1.78 kgm ²
LRC	: 6.1	Duty cycle	: Cont.(S1)
Rated torque	: 61.3 kgfm	Insulation class	: F
Locked rotor torque	: 150 %	Service factor	: 1.15
Breakdown torque	: 200 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	14/07/2026			

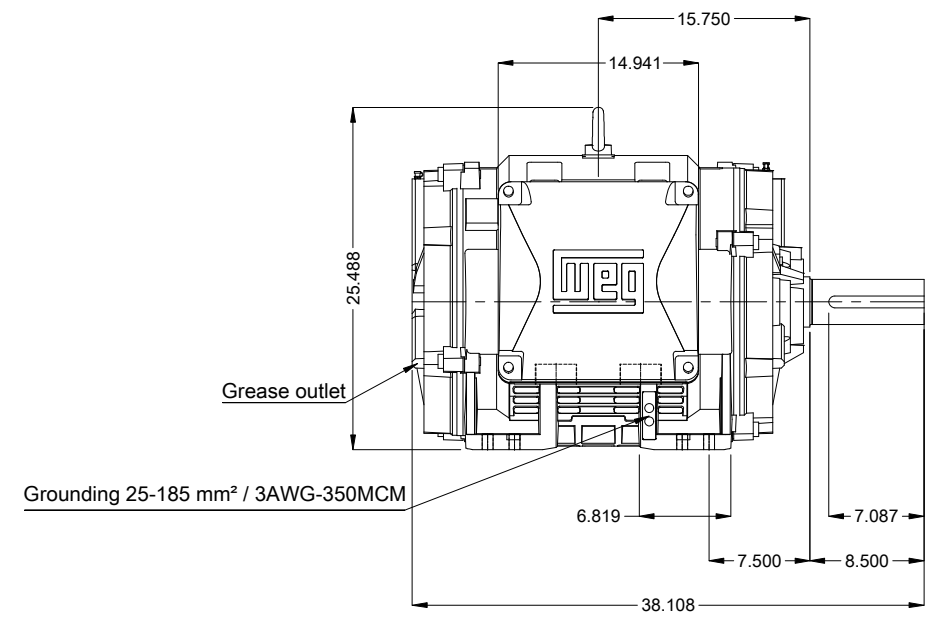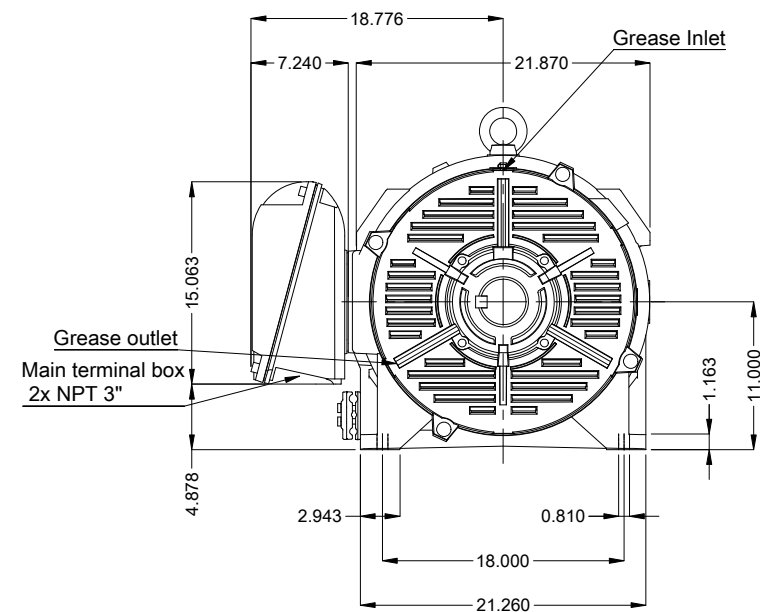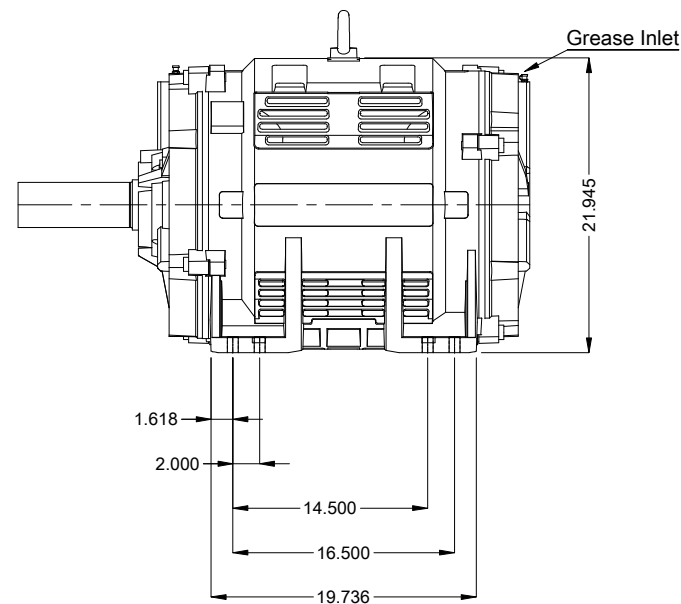

Color RAL 3002
Painting plan 203A
Mounting NEMA F-1
Mounting B3R(D)



150 HP 04 Poles 60 Hz										A
						Scale 1 : 14				
				HYBRISUSER						00
ECM		LOC		SUMMARY OF MODIFICATIONS		EXECUTED		CHECKED		RELEASED
										DATE
EXECUTED		HYBRISUSER		 THREE PH. MOTOR W40 HIGH EFF. FRAME 444/5T IP23 ODP		PREVIEW WDD 00				
CHECKED										
RELEASED										
REL. DATE										
						SHEET		1 / 1		