

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Standard Efficiency Three-Phase	Product code :	12894767
Frame	: 56HC	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 15.1 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0044 kgm ²	
Design	: A			
Output [HP]	1.5			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	1.78			
L. R. Amperes [A]	13.4			
LRC [A]	7.5x(Code K)			
No load current [A]	1.20			
Rated speed [RPM]	1750			
Slip [%]	2.78			
Rated torque [kgfm]	0.622			
Locked rotor torque [%]	250			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	16s (cold) 9s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%	75.4		
	50%	77.0		
	75%	80.0		
	100%	81.5		
Power Factor	25%	0.30		
	50%	0.54		
	75%	0.67		
	100%	0.76		
Bearing type	: Drive end 6204 ZZ	Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring	Without Bearing Seal	Max. traction : 52 kgf	
Lubrication interval	: -	-	Max. compression : 67 kgf	
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by				
Date	13/05/2022		Page 1 / 2	Revision


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 12894767

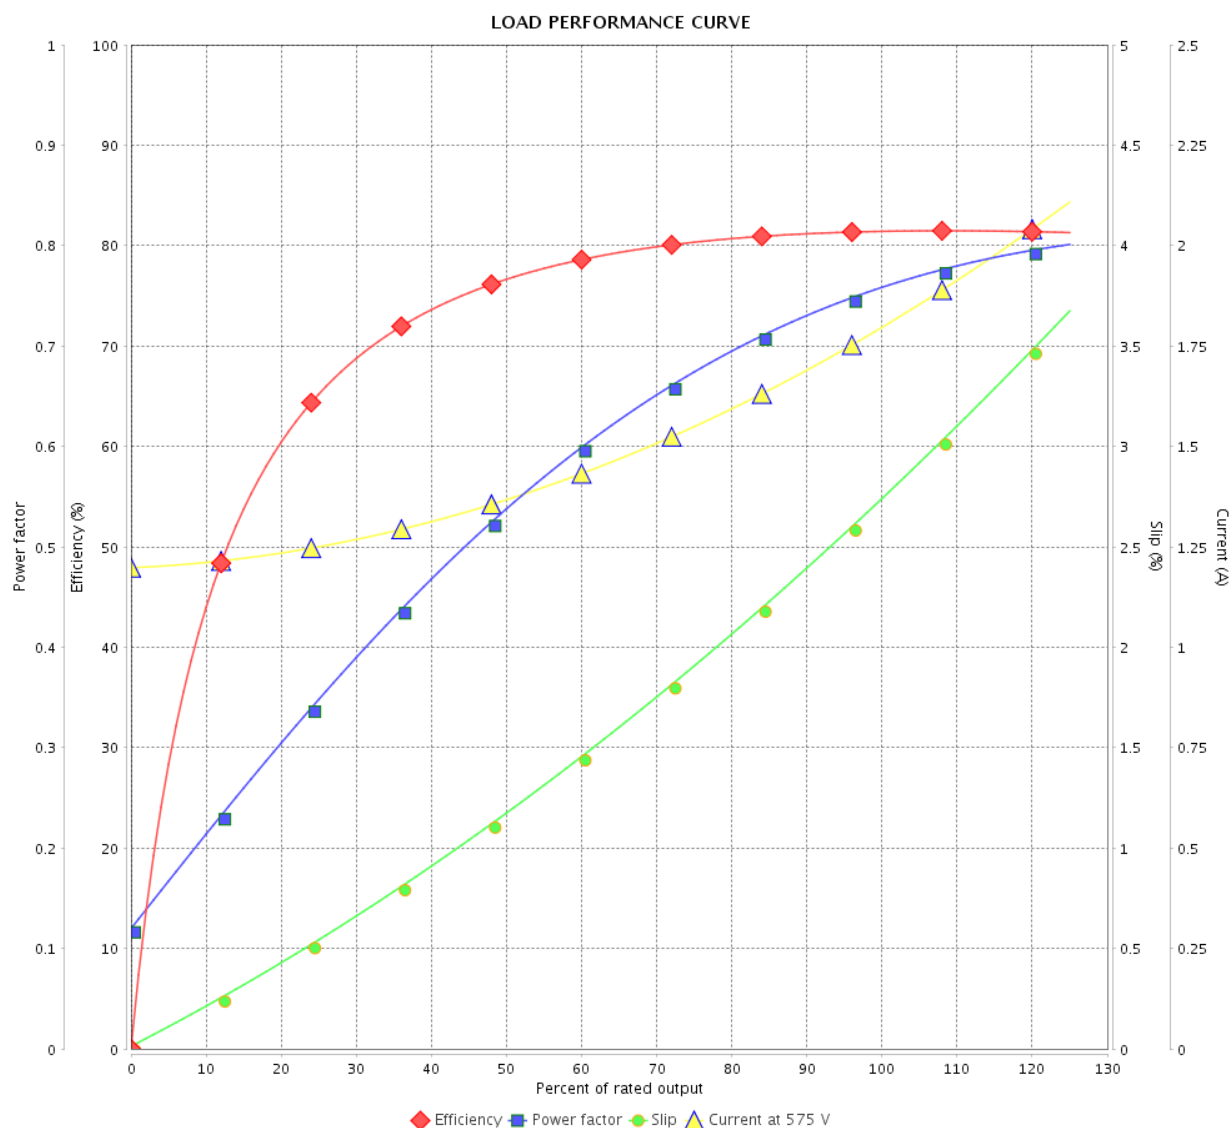



Performance : 575 V 60 Hz 4P

Rated current : 1.78 A
 LRC : 7.5
 Rated torque : 0.622 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 300 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0044 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	13/05/2022				

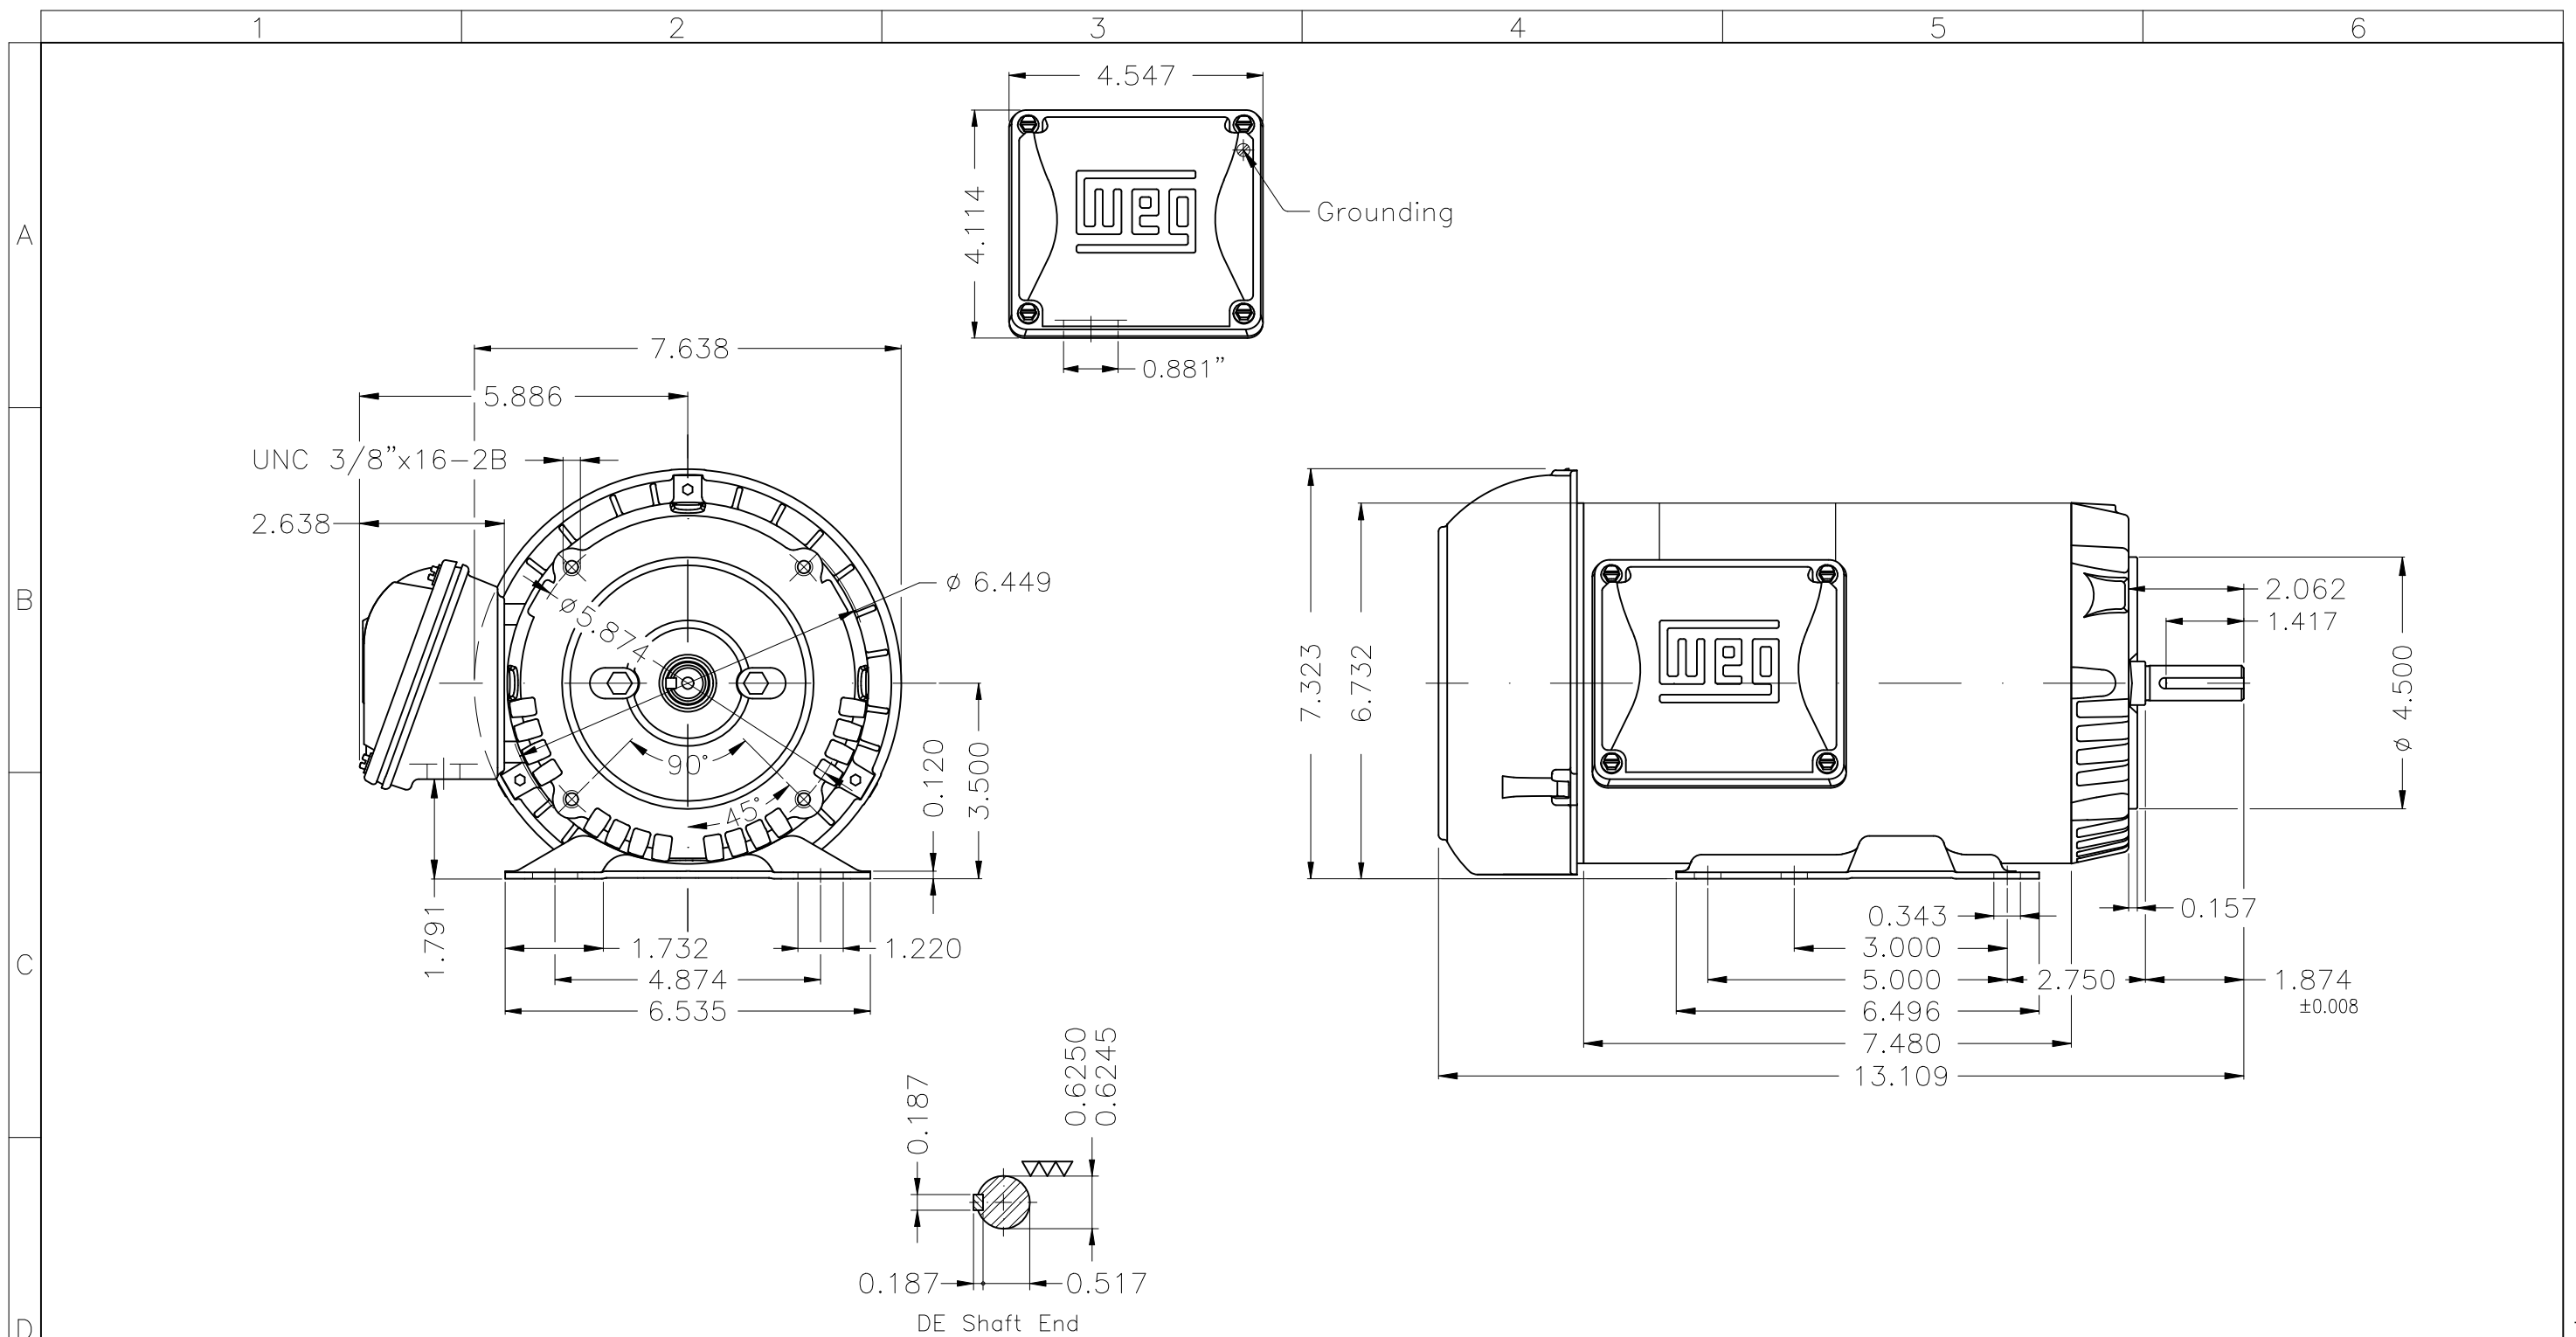

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting B34D									
			HYBRISUSER						00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR ROLLED STEEL FRAME 56HC IP55 TEFC			PREVIEW WDD 00			
CHECKED									
RELEASED									
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			