

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Farm Duty Single-Phase Product code : 12311417

Frame	: D56	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 1 HP (0.75 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 14.0/7.00 A	Protection degree	: IP55
L. R. Amperes	: 91.0/45.5 A	Cooling method	: IC411 - TEFC
LRC	: 6.5x(Code M)	Mounting	: F-1
No load current	: 11.5/5.75 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1750 rpm	Noise level ²	: 55.0 dB(A)
Slip	: 2.78 %	Starting method	: Direct On Line
Rated torque	: 0.415 kgfm	Approx. weight ³	: 15.3 kg
Locked rotor torque	: 320 %		
Breakdown torque	: 270 %		
Insulation class	: B		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0056 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	60.0	67.0	70.3	Max. traction	: 28 kgf
Power Factor	0.45	0.56	0.65	Max. compression	: 43 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6204 ZZ	6202 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	20/10/2024			

LOAD PERFORMANCE CURVE

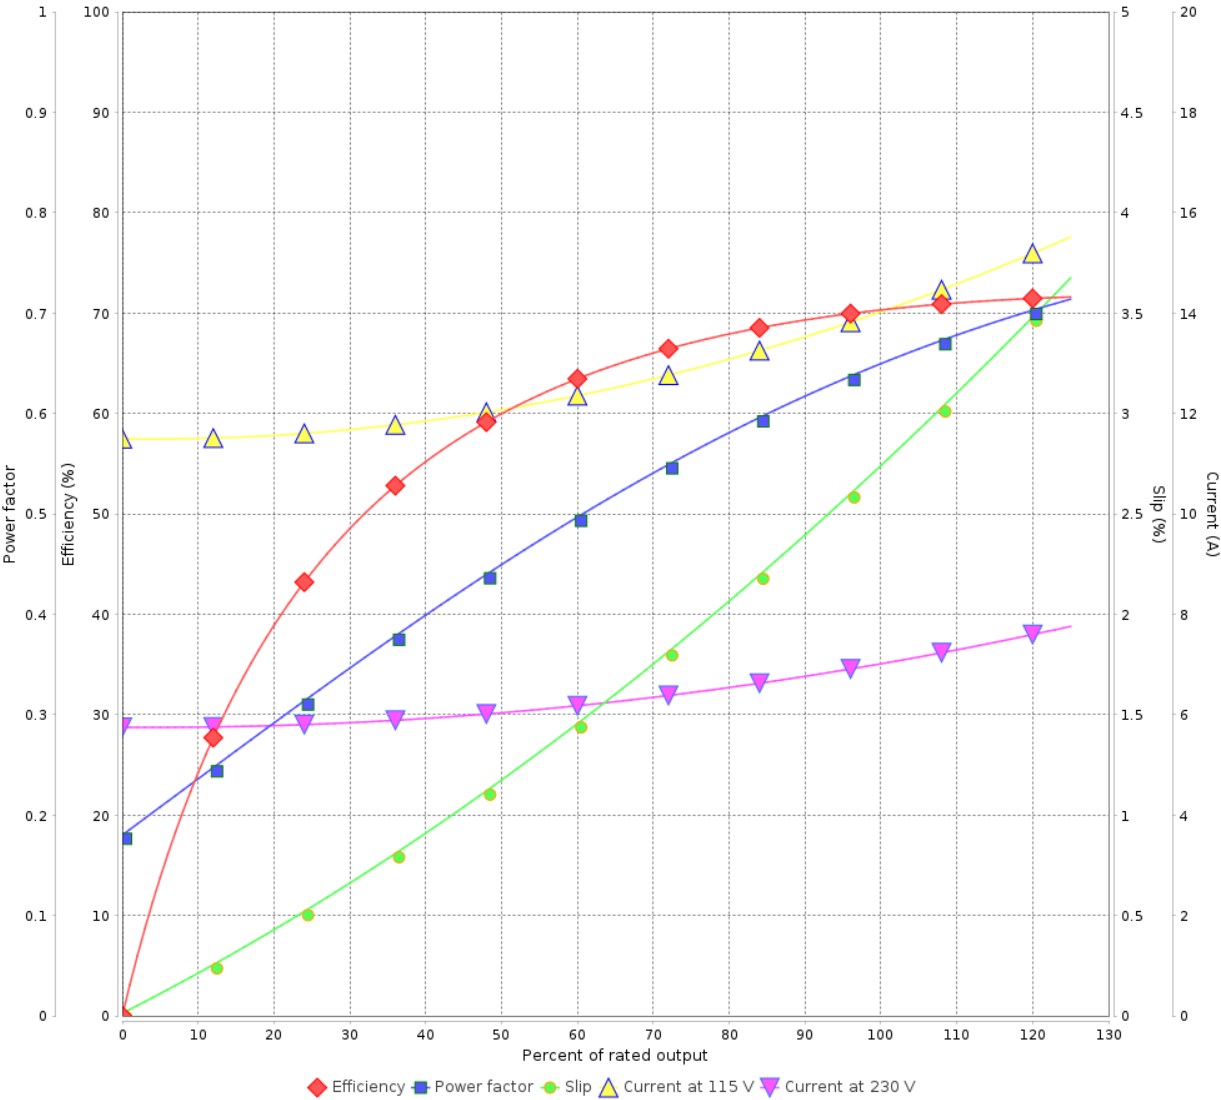
Single Phase Induction Motor - Squirrel Cage



Customer :




Product line : Farm Duty Single-Phase Product code : 12311417

LOAD PERFORMANCE CURVE



Performance : 115/230 V 60 Hz 4P			
Rated current	: 14.0/7.00 A	Moment of inertia (J)	: 0.0056 kgm²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 0.415 kgfm	Insulation class	: B
Locked rotor torque	: 320 %	Service factor	: 1.15
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1750 rpm		

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	20/10/2024				

	1	2	3	4	5	6																																																																
A																																																																						
B																																																																						
C																																																																						
D																																																																						
E																																																																						
1 HP 04 Poles 60 Hz			A	<table><tr><td colspan="7">Mounting B3R(D)</td></tr><tr><td colspan="7"></td></tr><tr><td colspan="7"></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>HYBRISUSER</td><td></td><td></td></tr><tr><td>ECM</td><td>LOC</td><td colspan="2">SUMMARY OF MODIFICATIONS</td><td>EXECUTED</td><td>CHECKED</td><td>RELEASED</td></tr><tr><td>EXECUTED</td><td>HYBRISUSER</td><td colspan="2" rowspan="3"></td><td colspan="2">SINGLE PH. MOTOR FARM DUTY</td><td rowspan="3">PREVIEW</td></tr><tr><td>CHECKED</td><td></td><td colspan="2">FRAME D56 IP55 TEFC</td></tr><tr><td>RELEASED</td><td></td><td colspan="2"></td></tr><tr><td>REL. DATE</td><td></td><td>WMO</td><td>Jaragua do Sul</td><td>Product Engineering</td><td>SHEET</td><td>1 / 1</td></tr></table>			Mounting B3R(D)																																HYBRISUSER			ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	EXECUTED	HYBRISUSER			SINGLE PH. MOTOR FARM DUTY		PREVIEW	CHECKED		FRAME D56 IP55 TEFC		RELEASED				REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1
Mounting B3R(D)																																																																						
				HYBRISUSER																																																																		
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED																																																																
EXECUTED	HYBRISUSER			SINGLE PH. MOTOR FARM DUTY		PREVIEW																																																																
CHECKED				FRAME D56 IP55 TEFC																																																																		
RELEASED																																																																						
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1																																																																

