

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: NEMA Premium Efficiency Three-Phase	Product code :	12682585
Frame	: 143/5T	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 18.4 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0054 kgm ²	
Design	: B			
Output [HP]	2			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	1.98			
L. R. Amperes [A]	19.6			
LRC [A]	9.9x(Code L)			
No load current [A]	0.850			
Rated speed [RPM]	3520			
Slip [%]	2.22			
Rated torque [kgfm]	0.412			
Locked rotor torque [%]	250			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	23s (cold) 13s (hot)			
Noise level ²	68.0 dB(A)			
Efficiency (%)	25%	82.1		
	50%	82.5		
	75%	85.5		
	100%	85.5		
Power Factor	25%	0.45		
	50%	0.73		
	75%	0.83		
	100%	0.89		
Bearing type	: Drive end 6205 ZZ	Non drive end 6203 ZZ	Foundation loads	
Sealing	: V'Ring	Without Bearing Seal	Max. traction : 26 kgf	
Lubrication interval	: -	-	Max. compression : 44 kgf	
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	13/05/2022		1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 12682585

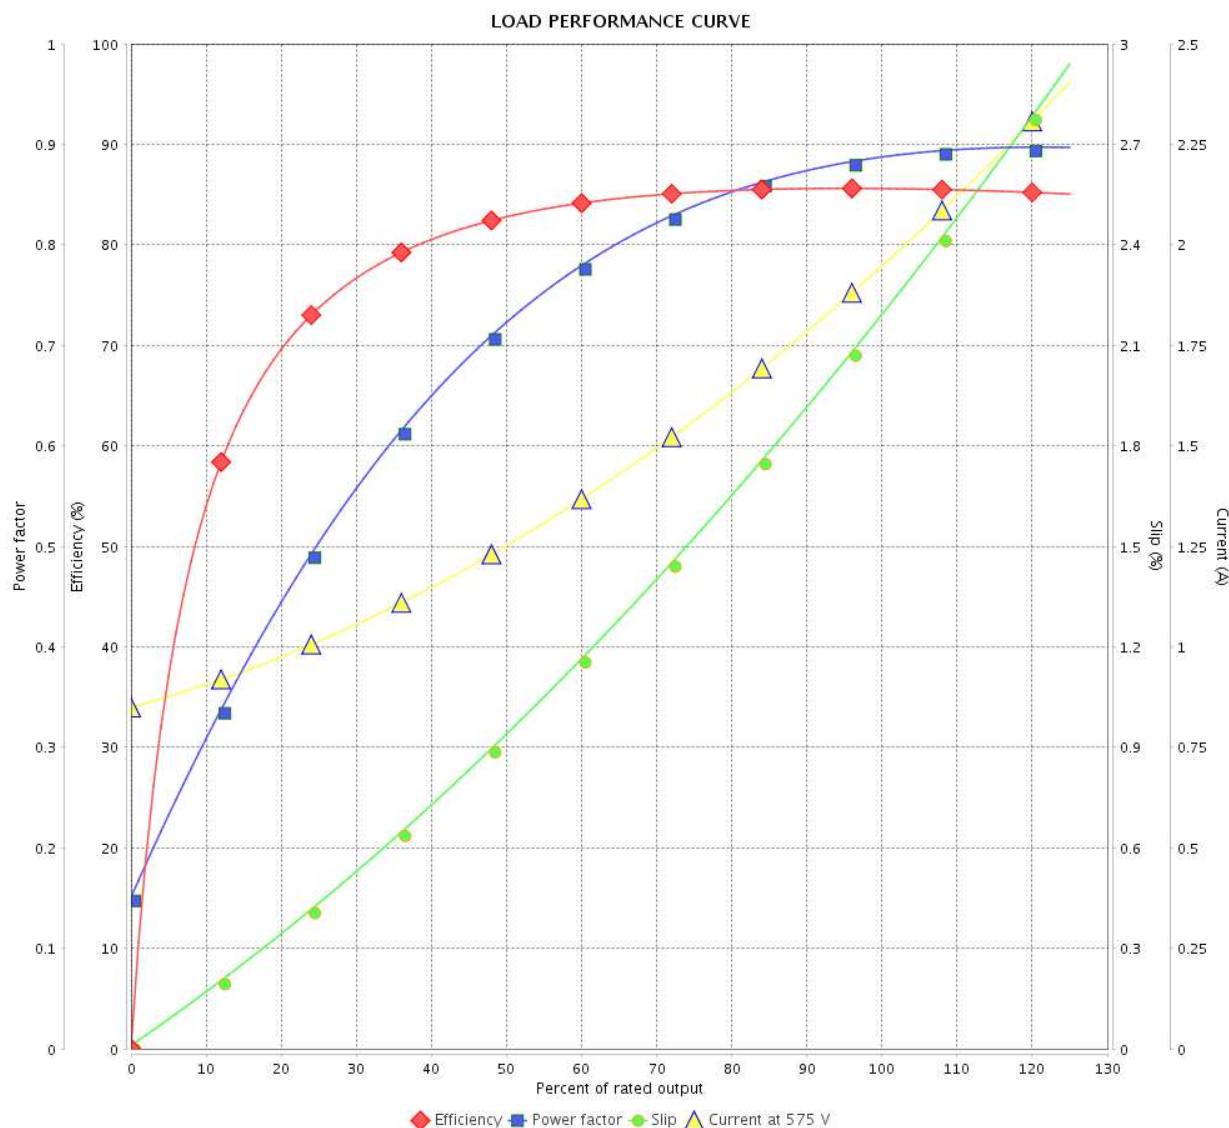

Performance : 575 V 60 Hz 2P

Rated current : 1.98 A
 LRC : 9.9
 Rated torque : 0.412 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2 Revision		
Checked by				
Date	13/05/2022			

