

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-Phase

Product code : 12775267

Frame : 182/4JM	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ² : 42.5 kg
Protection degree : IP55	Moment of inertia (J) : 0.0206 kgm ²
Design : B	

Output [HP]	1.5	1.5	1.5	1.5
Poles	6	6	6	6
Frequency [Hz]	60	50	50	50
Rated voltage [V]	230/460	380	400	415
Rated current [A]	5.08/2.54	2.68	2.62	2.64
L. R. Amperes [A]	39.6/19.8	16.9	18.1	19.5
LRC [A]	7.8x(Code M)	6.3x(Code J)	6.9x(Code K)	7.4x(Code L)
No load current [A]	3.25/1.63	1.60	1.71	1.80
Rated speed [RPM]	1170	955	960	965
Slip [%]	2.50	4.50	4.00	3.50
Rated torque [kgfm]	0.930	1.14	1.13	1.13
Locked rotor torque [%]	320	250	300	330
Breakdown torque [%]	400	290	330	370
Service factor	1.25	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K
Locked rotor time	28s (cold) 16s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%			
	50%	84.0	85.5	84.5
	75%	86.5	86.5	86.5
	100%	87.5	85.5	86.5
Power Factor	25%			
	50%	0.45	0.52	0.48
	75%	0.54	0.63	0.60
	100%	0.62	0.73	0.70

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	13.4	13.4	13.4	13.4
	P2 (0,5;1,0)	10.3	10.3	10.3	10.3
	P3 (0,25;1,0)	9.3	9.3	9.3	9.3
	P4 (0,9;0,5)	8.8	8.8	8.8	8.8
	P5 (0,5;0,5)	5.8	5.8	5.8	5.8
	P6 (0,5;0,25)	4.8	4.8	4.8	4.8
	P7 (0,25;0,25)	3.5	3.5	3.5	3.5

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type :	6307 ZZ	6206 ZZ	Max. traction : 66 kgf
Sealing :	V'Ring	V'Ring	Max. compression : 108 kgf
Lubrication interval :	-	-	
Lubricant amount :	-	-	
Lubricant type :	Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

(2) Measured at 1m and with tolerance of +3dB(A).

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	23/10/2024		Page 1 / 6	Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 5.62A SF 1.15 SFA 6.46A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 6		Revision
Checked by					
Date	23/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-Phase

Product code : 12775267

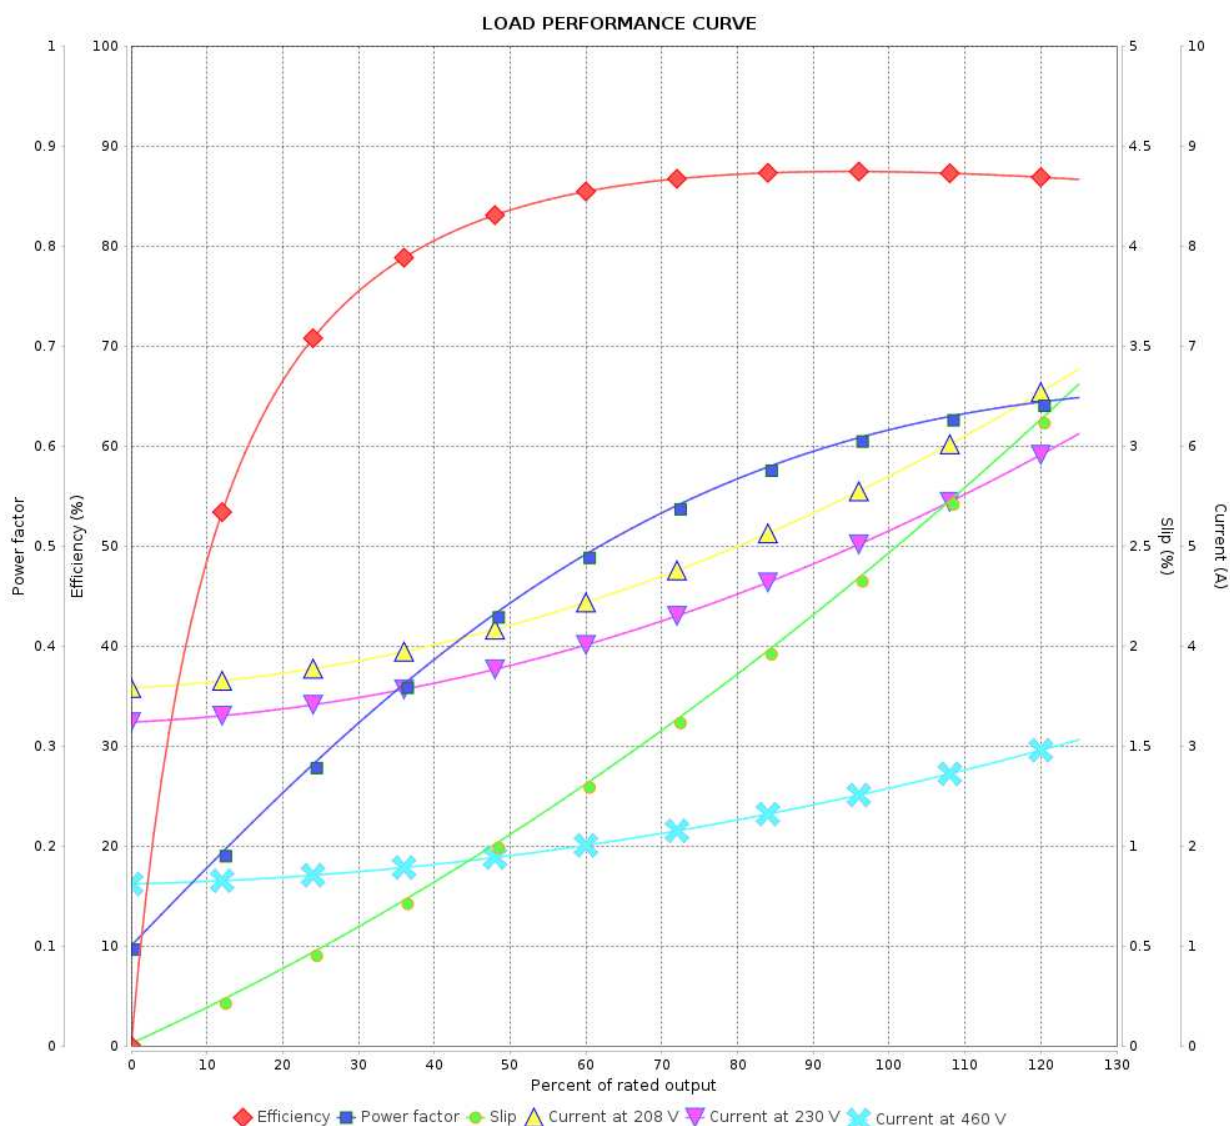

Performance : 230/460 V 60 Hz 6P

Rated current : 5.08/2.54 A
LRC : 7.8
Rated torque : 0.930 kgfm
Locked rotor torque : 320 %
Breakdown torque : 400 %
Rated speed : 1170 rpm

Moment of inertia (J) : 0.0206 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 6Revision		
Checked by				
Date	23/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-Phase

Product code : 12775267

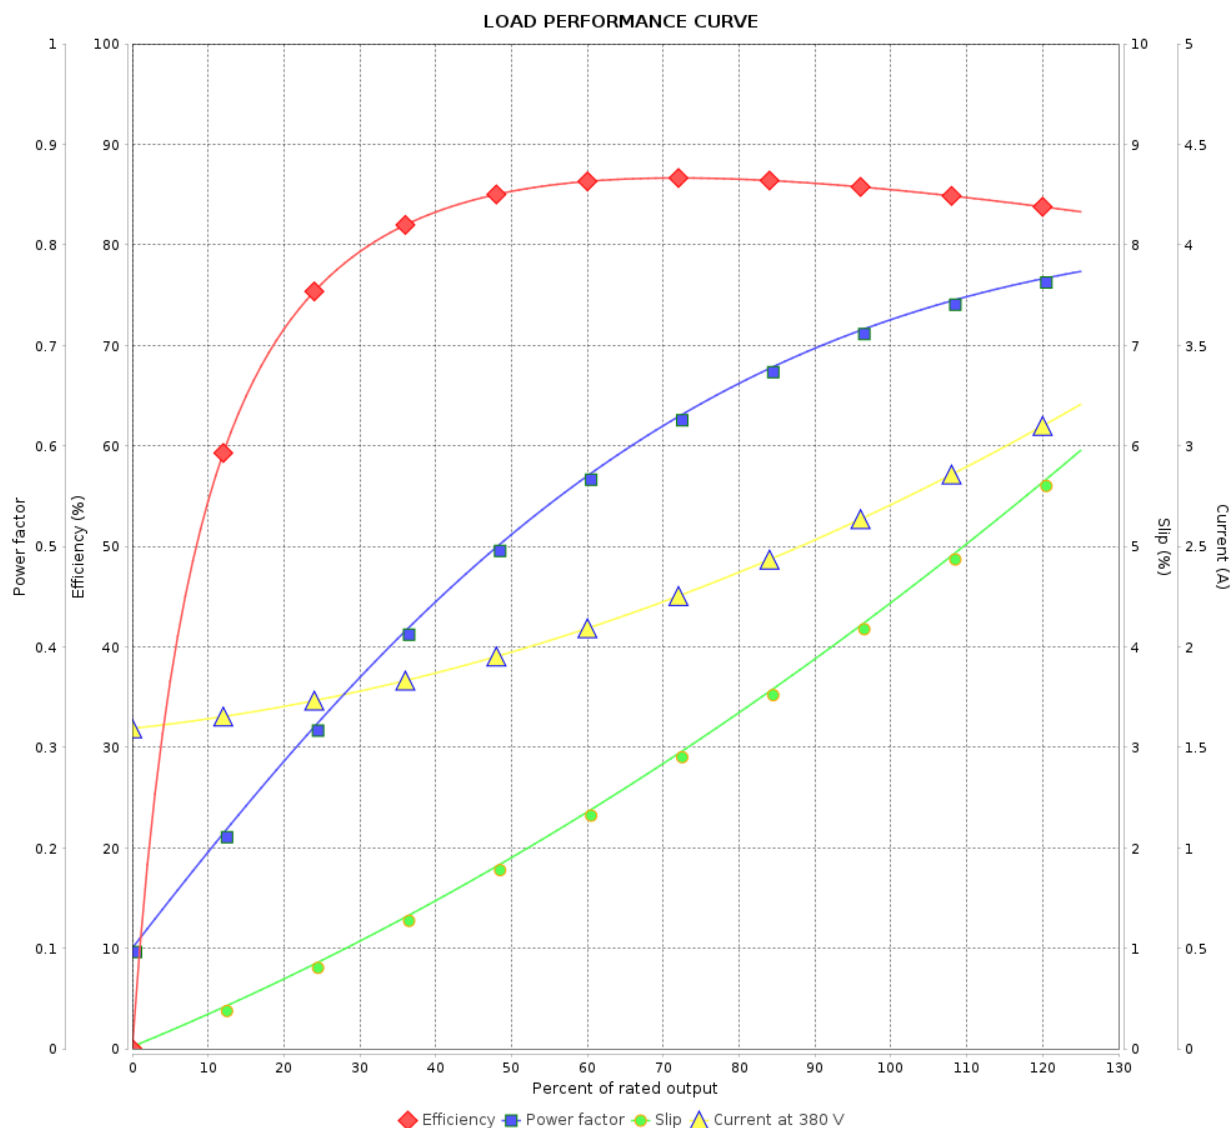

Performance : 380 V 50 Hz 6P IE4

Rated current : 2.68 A
LRC : 6.3
Rated torque : 1.14 kgfm
Locked rotor torque : 250 %
Breakdown torque : 290 %
Rated speed : 955 rpm

Moment of inertia (J) : 0.0206 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 4 / 6Revision	
Checked by					
Date	23/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-Phase

Product code : 12775267

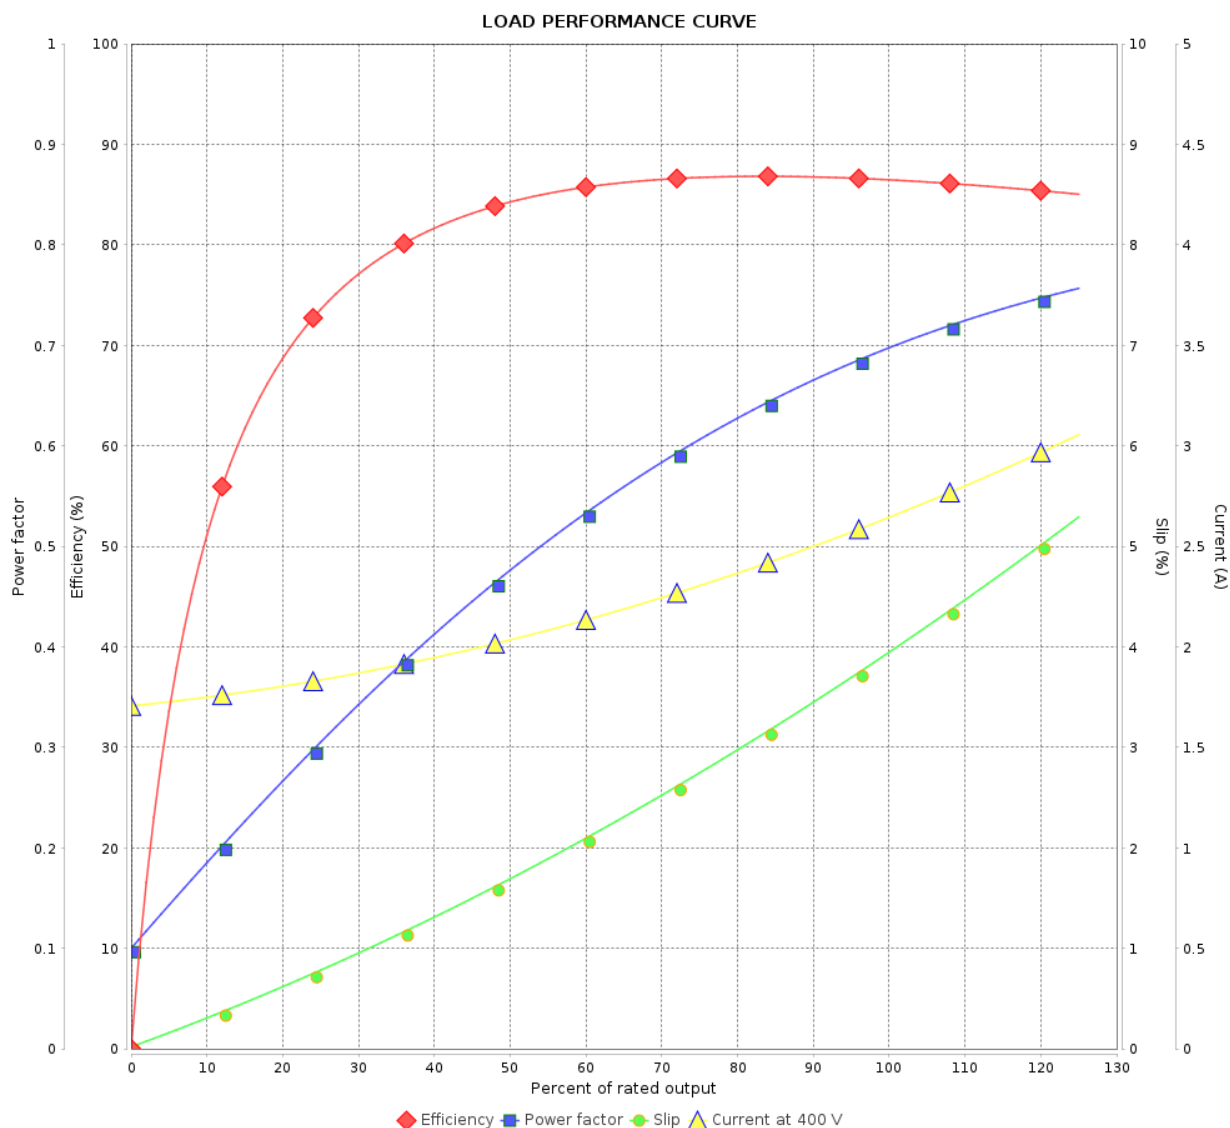

Performance : 400 V 50 Hz 6P IE4

Rated current : 2.62 A
LRC : 6.9
Rated torque : 1.13 kgfm
Locked rotor torque : 300 %
Breakdown torque : 330 %
Rated speed : 960 rpm

Moment of inertia (J) : 0.0206 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 5 / 6 Revision			
Checked by					
Date	23/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-
Phase

Product code : 12775267





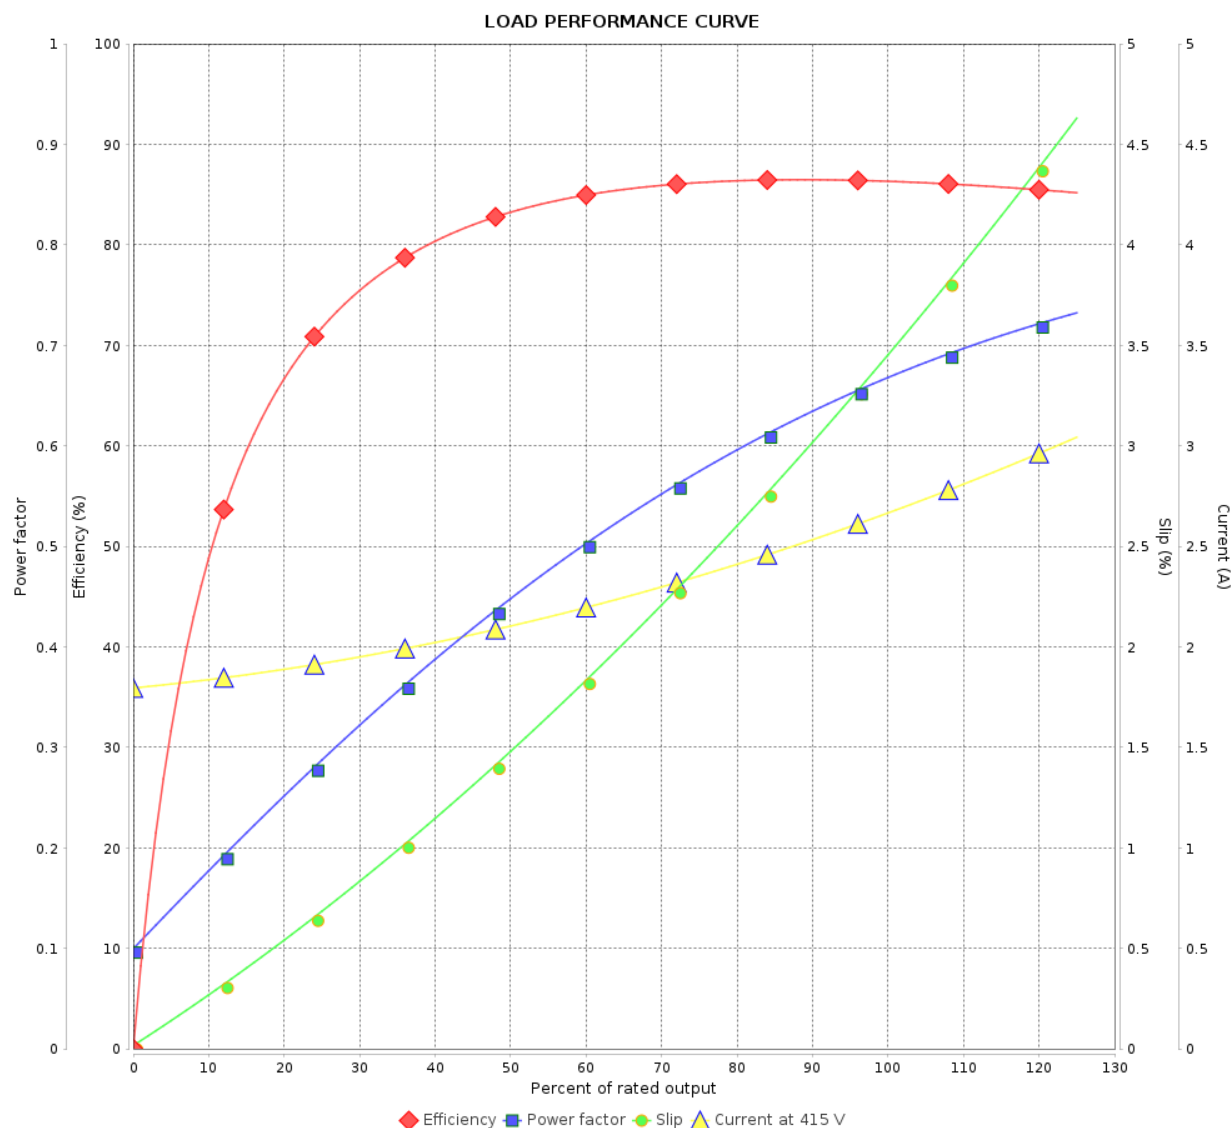


Performance : 415 V 50 Hz 6P IE4

Rated current : 2.64 A
LRC : 7.4
Rated torque : 1.13 kgfm
Locked rotor torque : 330 %
Breakdown torque : 370 %
Rated speed : 965 rpm

Moment of inertia (J) : 0.0206 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 6 / 6 Revision		
Checked by				
Date	23/10/2024			

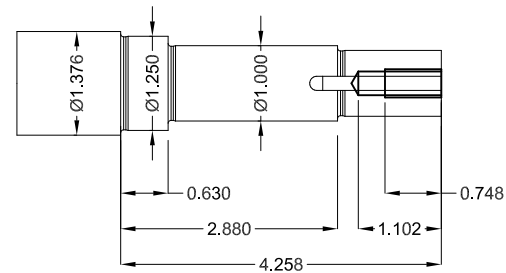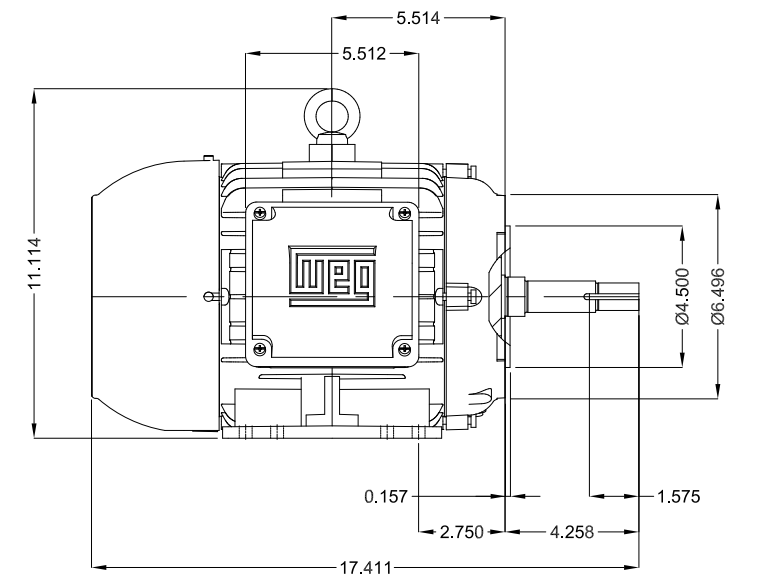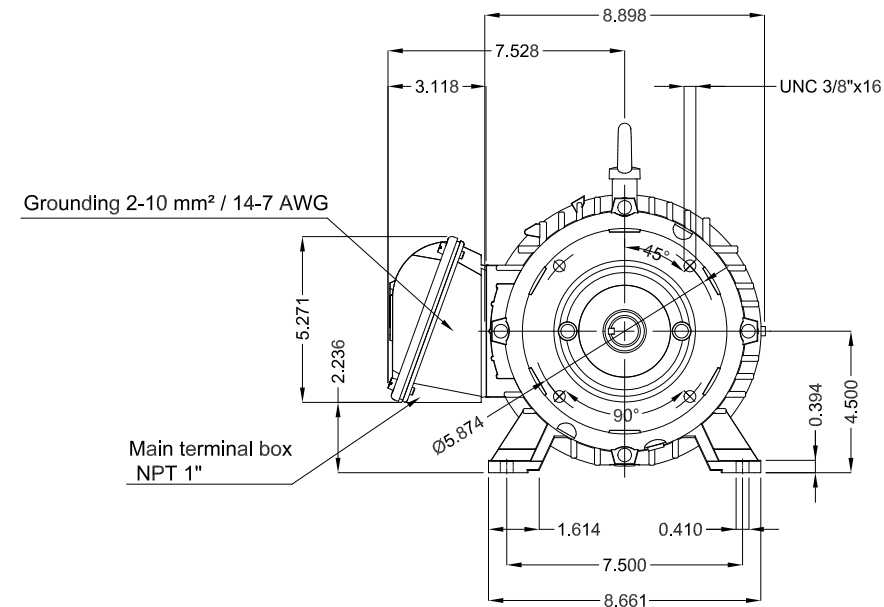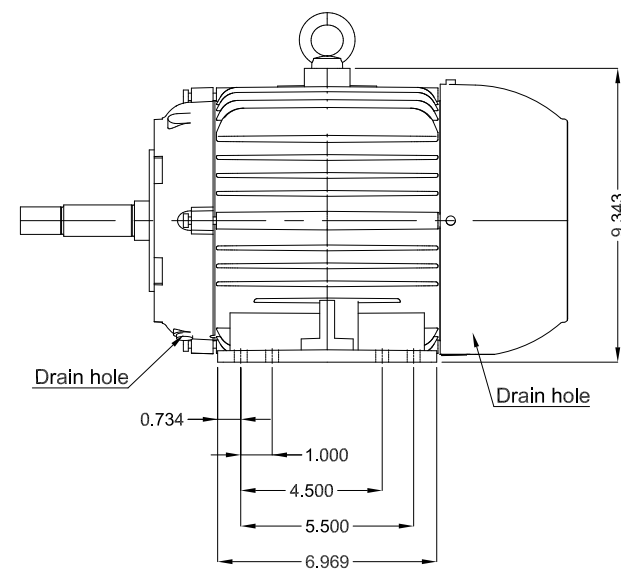

Color RAL 5009

Painting plan 207A

Mounting NEMA F-1

Mounting B34R(D)

EUNC 3/8"-16 WEG WPR-7309

1.5 HP 06 Poles 60 Hz										A	
						HYBRISUSER					
						HYBRISUSER				00	
ECM		LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	
EXECUTED	HYBRISUSER		THREE PH. MOTOR JM/JP/JET PUMP W22 NEMA PREM. FRAME 182/4JM IP55 TEFC				EFF.	PREVIEW			
CHECKED											
RELEASED											
REL. DATE											
						SHEET		/			