DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: JM Pump NEMA Premium Efficiency Three-Phase	Product code :	13374124

Frame	: 143/5JM	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight³	: 19.6 kg
Design	: B	Moment of inertia (J)	: 0.0060 kgm²

Output [HP]		1.5
Poles		4
Frequency [Hz]		60
Rated voltage [V]		575
Rated current [A]		1.66
L. R. Amperes [A]		14.4
LRC [A]		8.7x(Code L)
No load current [A]		0.958
Rated speed [RPM]		1760
Slip [%]		2.22
Rated torque [kgfm]		0.619
Locked rotor torque [%]		280
Breakdown torque [%]		330
Service factor		1.15
Temperature rise		80 K
Locked rotor time		27s (cold) 15s (hot)
Noise level²		52.0 dB(A)
Efficiency (%)	25%	
	50%	84.0
	75%	86.5
	100%	86.5
Power Factor	25%	
	50%	0.56
	75%	0.69
	100%	0.77

		Drive end	Non drive end
Bearing type	:	6206 ZZ	6203 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 48 kgf

Max. compression : 68 kgf

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	16/05/2022		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: JM Pump NEMA Premium Efficiency Three-Phase	Product code :	13374124

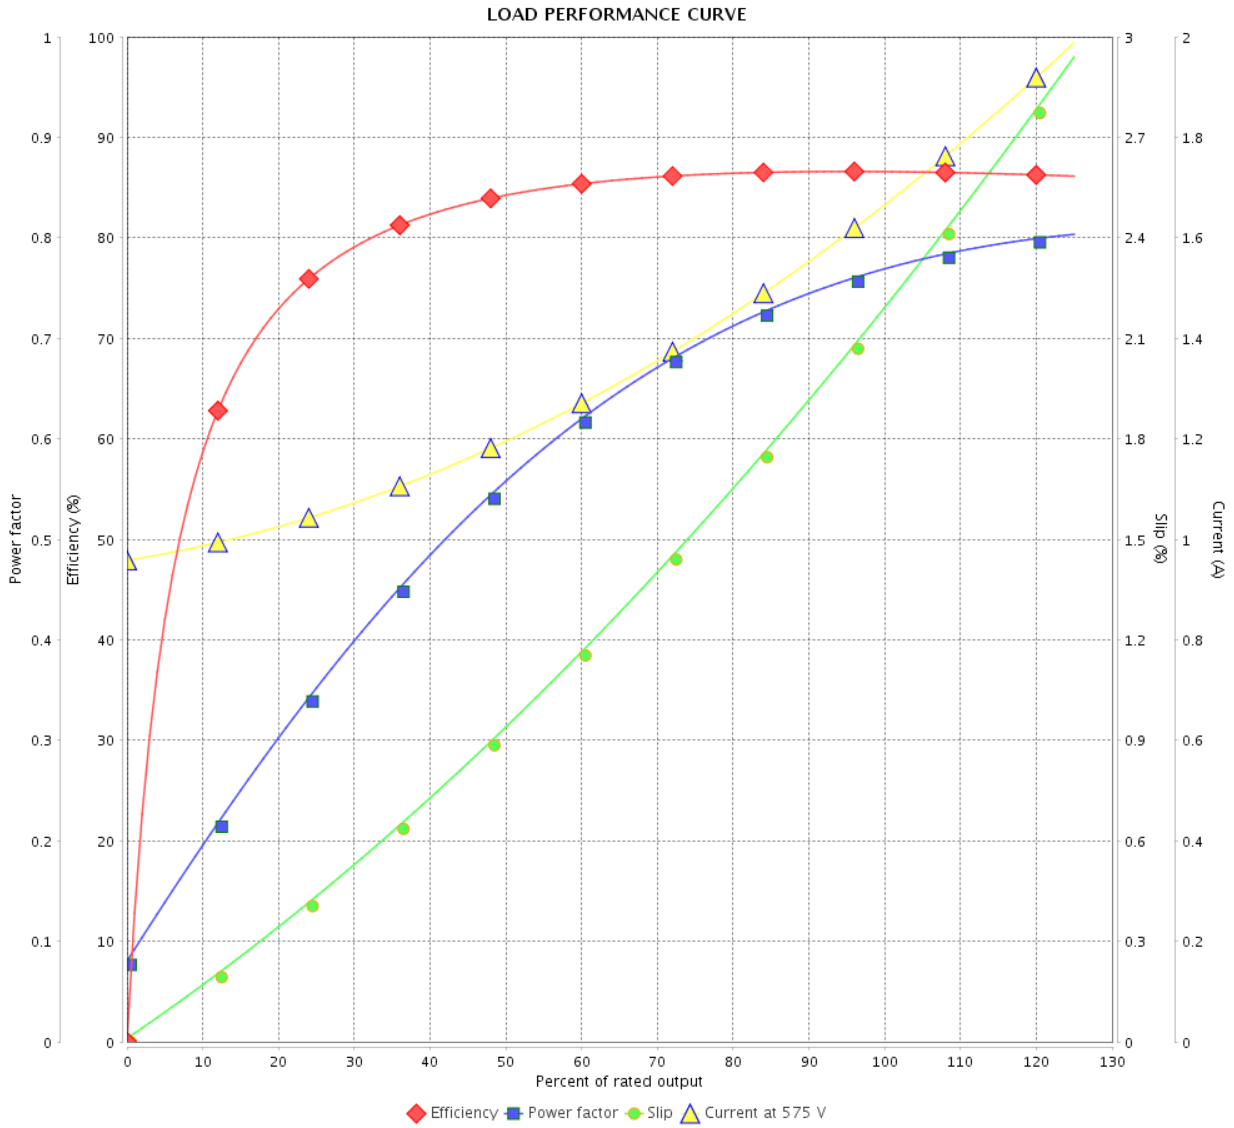



Performance	: 575 V 60 Hz 4P		
Rated current	: 1.66 A	Moment of inertia (J)	: 0.0060 kgm²
LRC	: 8.7	Duty cycle	: Cont.(S1)
Rated torque	: 0.619 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.15
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 1760 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	16/05/2022		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

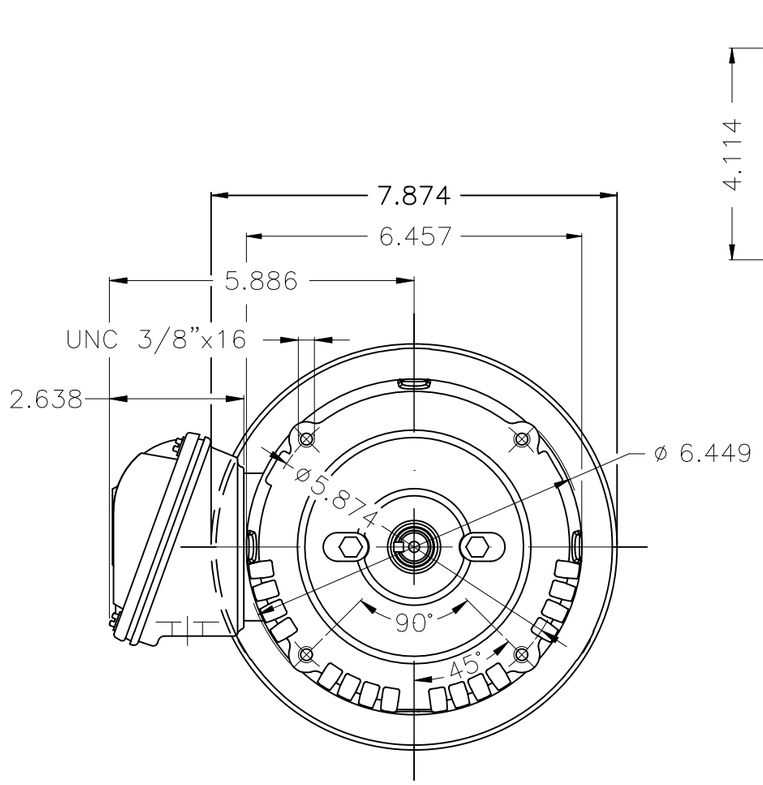

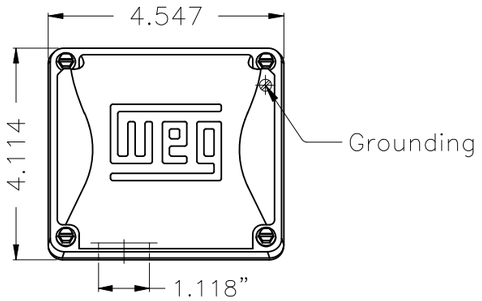

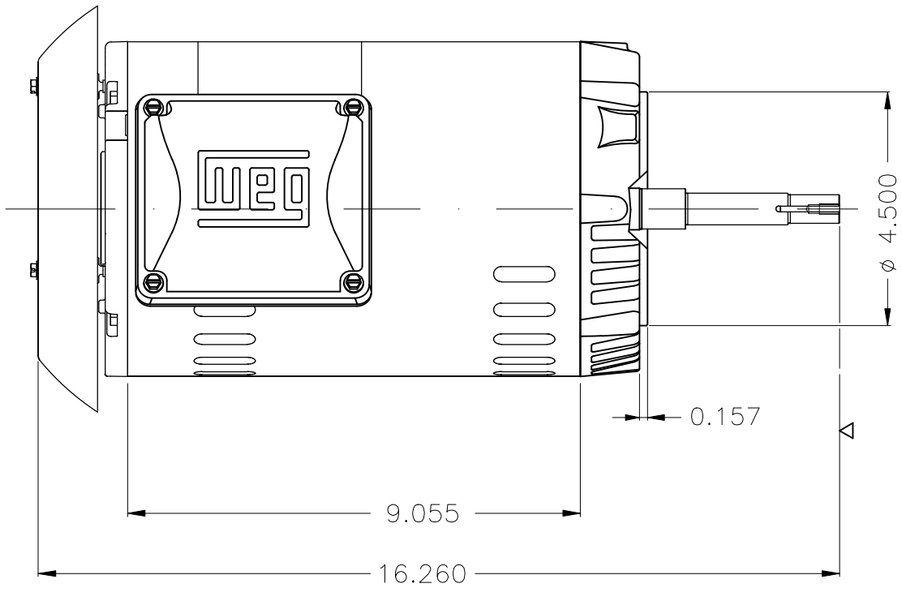

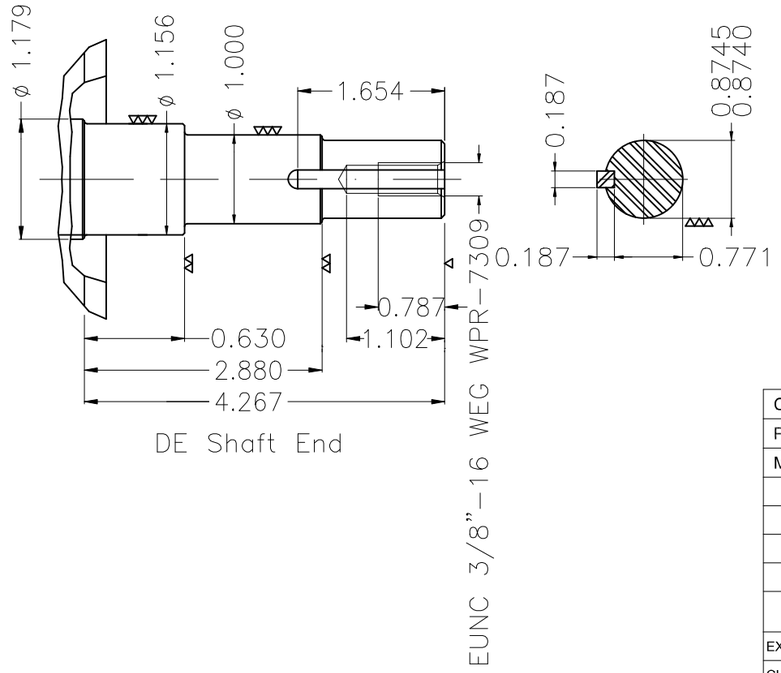

			HYBRISUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER

Color Munsell N 1 matte black

Painting plan 207N

Mounting W-6/V18R(D)

EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL JM NEMA PREM. EFF.	PREVIEW
CHECKED		FRAME 143/5JM IP21 ODP	WDD 00
RELEASED			
REL. DATE		WMO Jaragua do Sul Product Engineering	SHEET 1 / 1

1.5 HP 04 Poles 60 Hz

A

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.