

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase Product code : 11168167

Frame	: E143/5JM	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 5.80/2.90 A	Protection degree	: IP21
L. R. Amperes	: 47.6/23.8 A	Cooling method	: IC01 - ODP
LRC	: 8.2x(Code L)	Mounting	: F-1
No load current	: 3.20/1.60 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1730 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 3.89 %	Starting method	: Direct On Line
Rated torque	: 0.839 kgfm	Approx. weight ³	: 21.2 kg
Locked rotor torque	: 350 %		
Breakdown torque	: 330 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0067 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	82.5	85.5	86.5	Max. traction	: 68 kgf
Power Factor	0.58	0.70	0.78	Max. compression	: 89 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6206 ZZ	6204 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes
USABLE @208V 5.95A SF 1.00 SFA 5.95A

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	23/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :



Product line : Close Coupled Pump NEMA Product code : 11168167
Premium Efficiency Three-Phase

LOAD PERFORMANCE CURVE

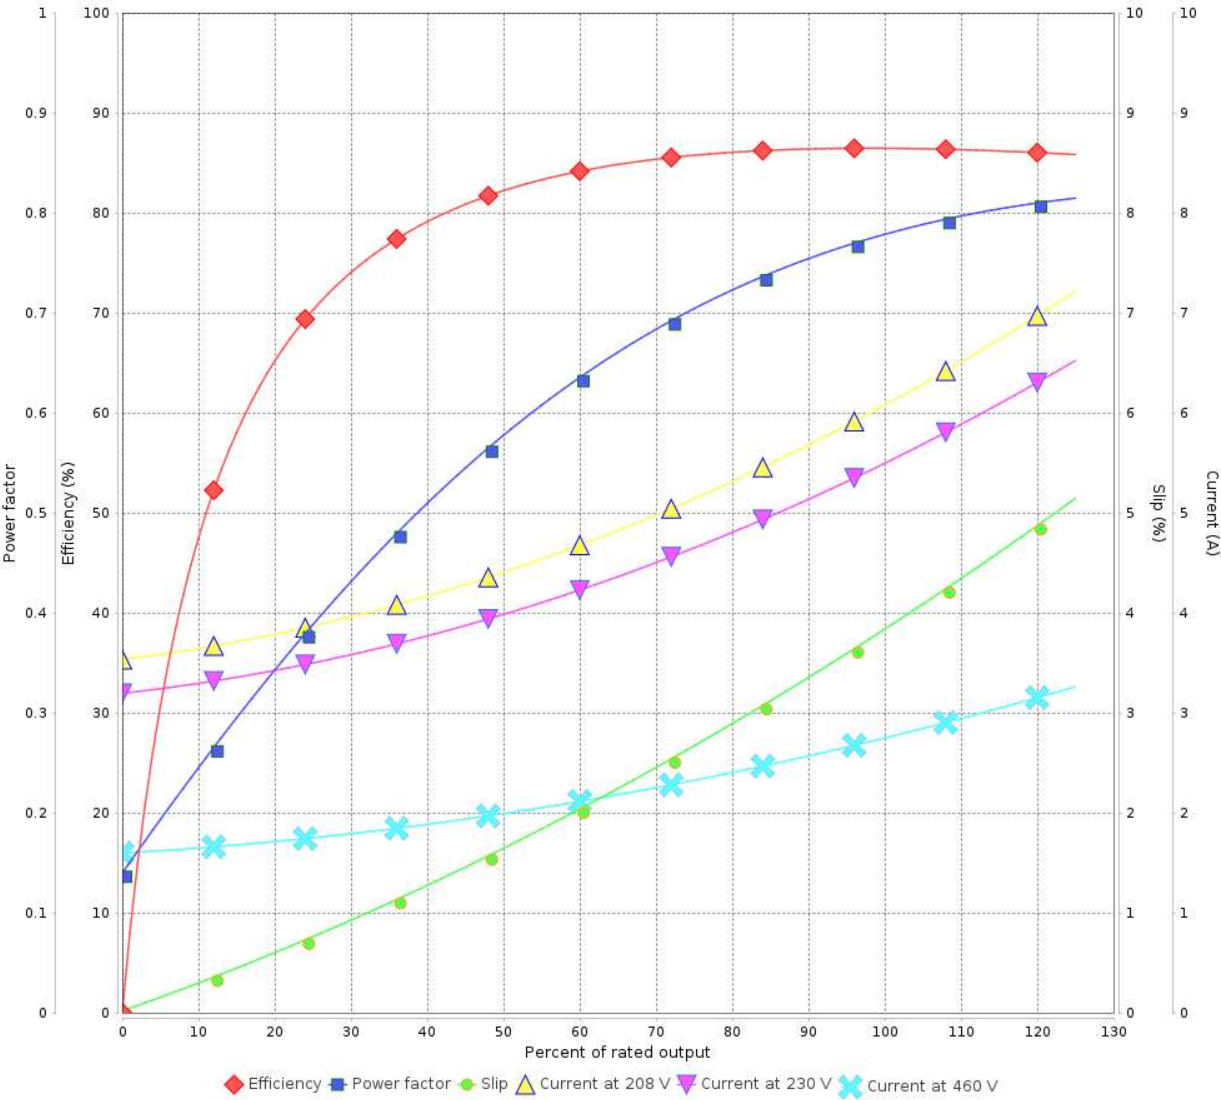

Performance : 230/460 V 60 Hz 4P			
Rated current	: 5.80/2.90 A	Moment of inertia (J)	: 0.0067 kgm ²
LRC	: 8.2	Duty cycle	: Cont.(S1)
Rated torque	: 0.839 kgfm	Insulation class	: F
Locked rotor torque	: 350 %	Service factor	:
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 1730 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	23/10/2024				

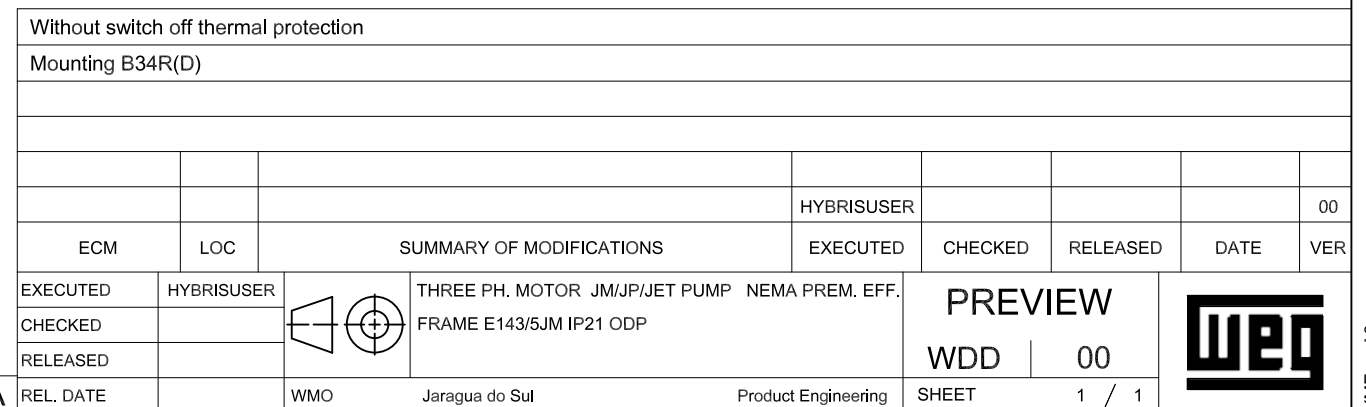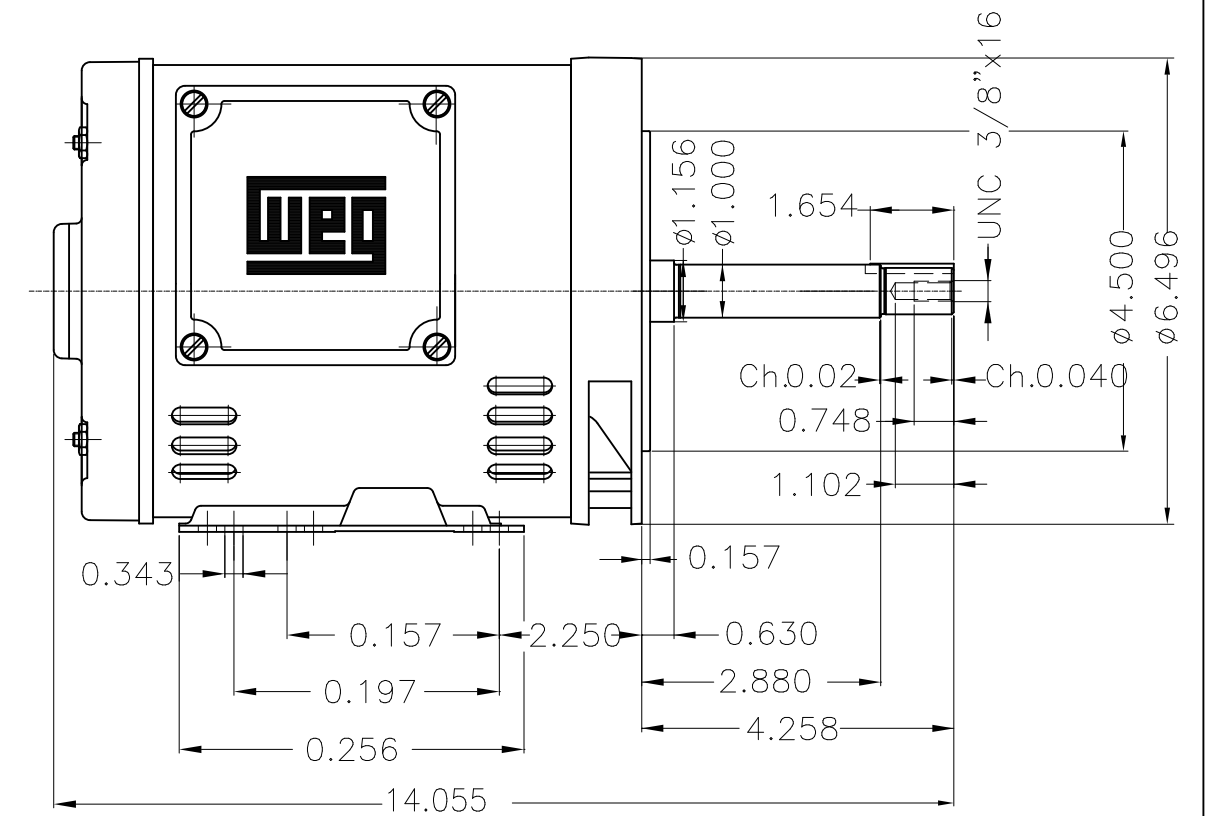

XME A3