

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-Phase
Product code : 12038016

Frame	: 213/5JM	Locked rotor time	: 32s (cold) 18s (hot)
Output	: 10 HP (7.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 9.28 A	Protection degree	: IP55
L. R. Amperes	: 66.8 A	Cooling method	: IC411 - TEFC
LRC	: 7.2x(Code H)	Mounting	: F-1
No load current	: 2.88 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3530 rpm	Noise level ²	: 68.0 dB(A)
Slip	: 1.94 %	Starting method	: Direct On Line
Rated torque	: 2.06 kgfm	Approx. weight ³	: 81.1 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 290 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0268 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	90.2	90.2	Max. traction	: 69 kgf
Power Factor	0.79	0.87	0.90	Max. compression	: 151 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
10.7	8.7	7.8	5.2	3.3	2.1	1.3

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6309 Z C3	: 6207 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: 19000 h	: 40000 h
Lubricant amount	: 13 g	: 0 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	23/10/2024			
		Page		Revision
		1 / 2		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-
Phase

Product code : 12038016





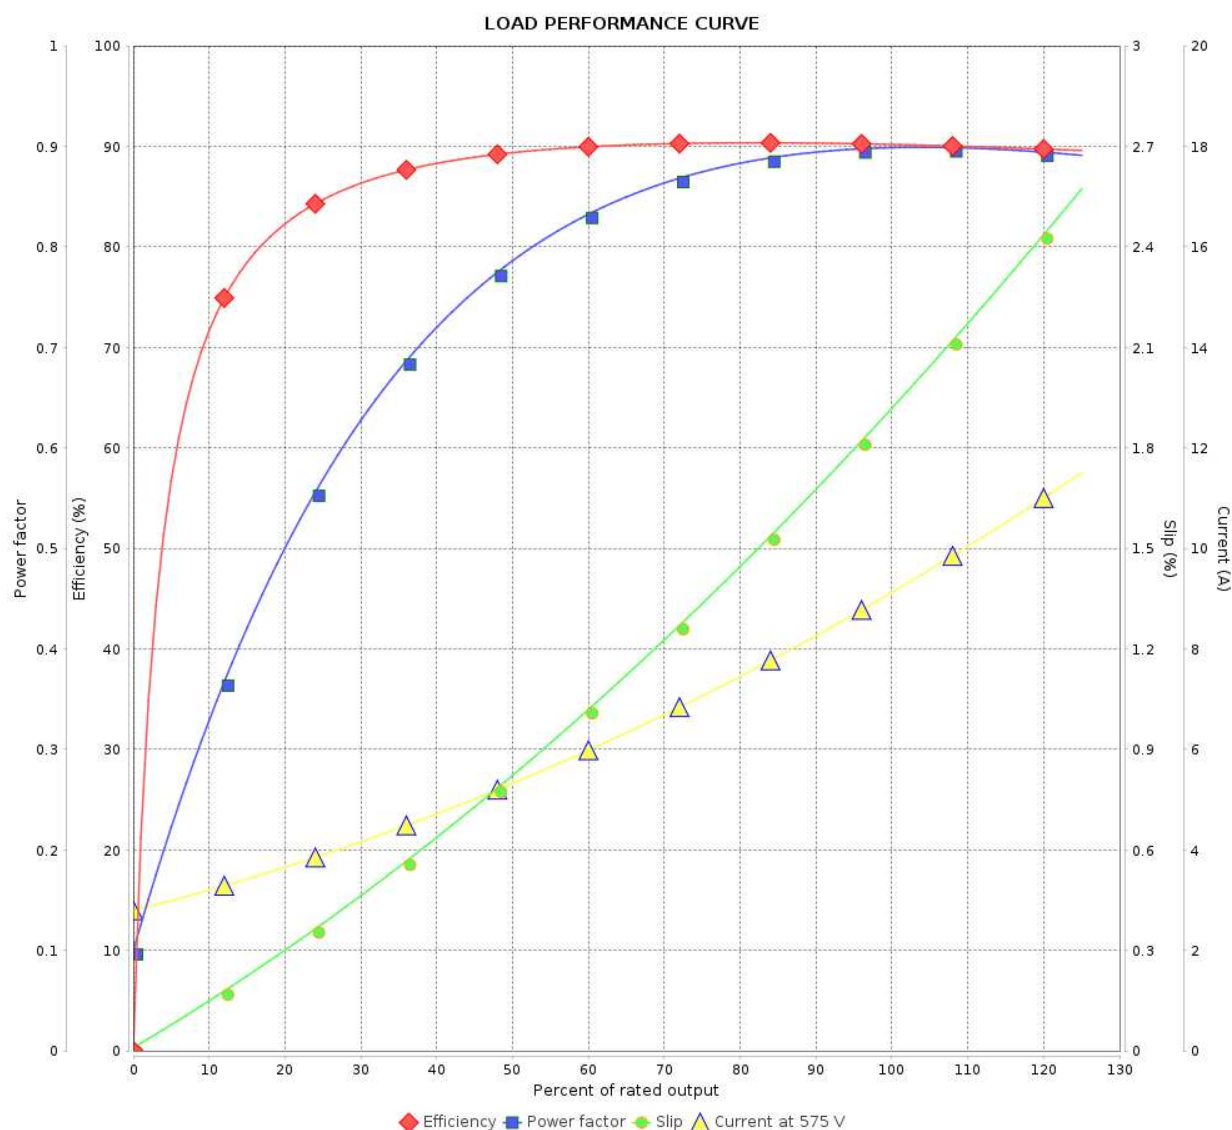


Performance : 575 V 60 Hz 2P

Rated current : 9.28 A
LRC : 7.2
Rated torque : 2.06 kgfm
Locked rotor torque : 220 %
Breakdown torque : 290 %
Rated speed : 3530 rpm

Moment of inertia (J) : 0.0268 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date	23/10/2024				

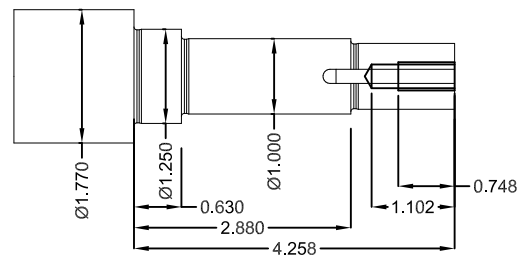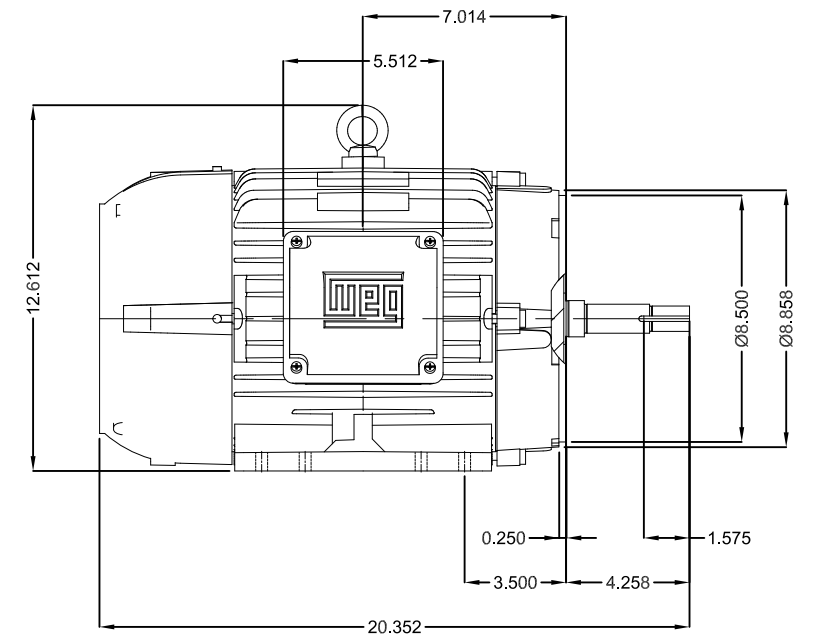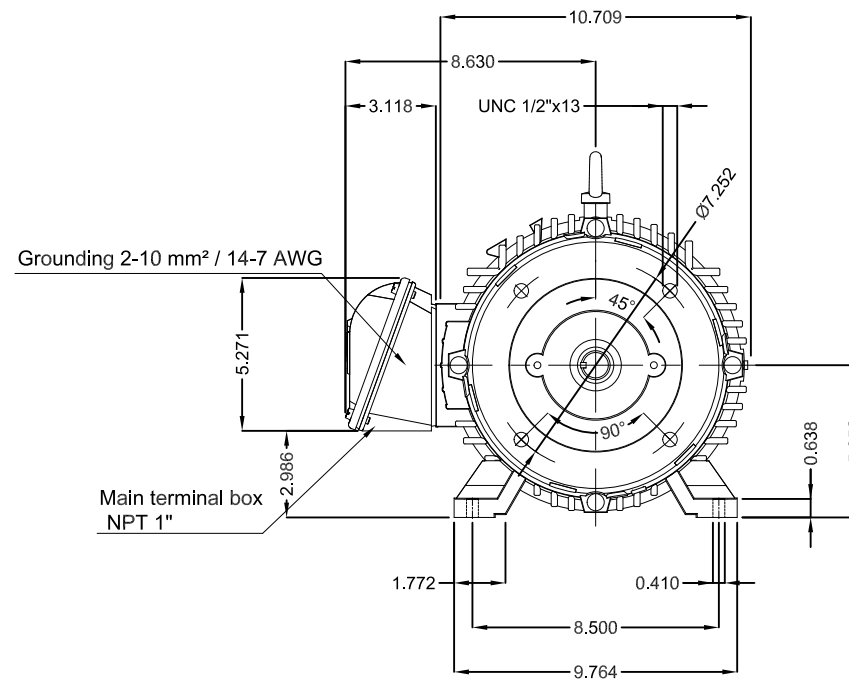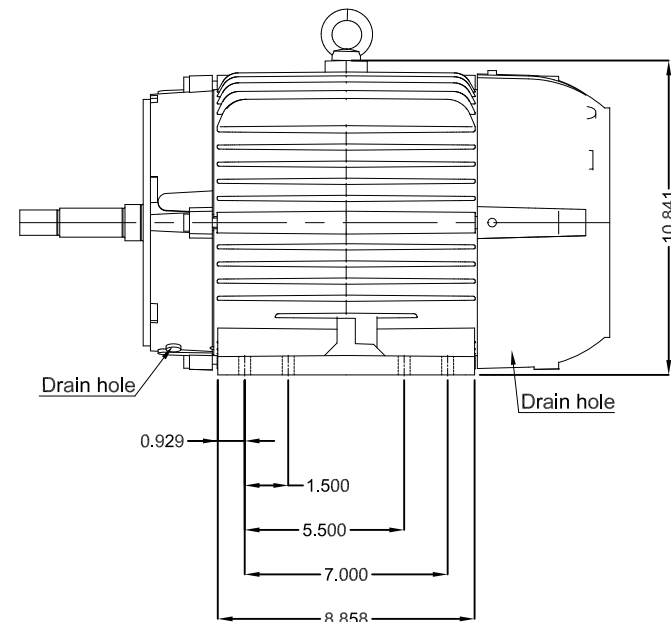

EUNC 3/8"-16 WEG WPR-7309

Color RAL 5009
Painting plan 207A
Mounting B34R(D)

10 HP 02 Poles 60 Hz										A
							HYBRISUSER			
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	00
EXECUTED	HYBRISUSER		THREE PH. MOTOR JM/JP/JET PUMP W22 NEMA PREM. EFF. FRAME 213/5JM IP55 TEFC				PREVIEW WDD 00			
CHECKED										
RELEASED										
REL. DATE										
							SHEET		/	