

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor Product code : 10020160

Frame	: W56	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 0.33 HP (0.25 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.00/3.10-3.50 A	Protection degree	: IP21
L. R. Amperes	: 28.0/12.4-14.0 A	Cooling method	: IC01 - ODP
LRC	: 4.0x(Code L)	Mounting	: F-1
No load current	: 6.10/2.63-3.05 A	Rotation ¹	: CCW
Rated speed	: 3445 rpm	Starting method	: Direct On Line
Slip	: 4.31 %	Approx. weight ³	: 7.9 kg
Rated torque	: 0.070 kgfm		
Locked rotor torque	: 270 %		
Breakdown torque	: 270 %		
Insulation class	: B		
Service factor	: 1.75		
Moment of inertia (J)	: 0.0062 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	35.0	43.1	48.3	Max. traction	: 2 kgf
Power Factor	0.48	0.55	0.62	Max. compression	: 10 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	Slinger	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	24/10/2024			


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor Product code : 10020160

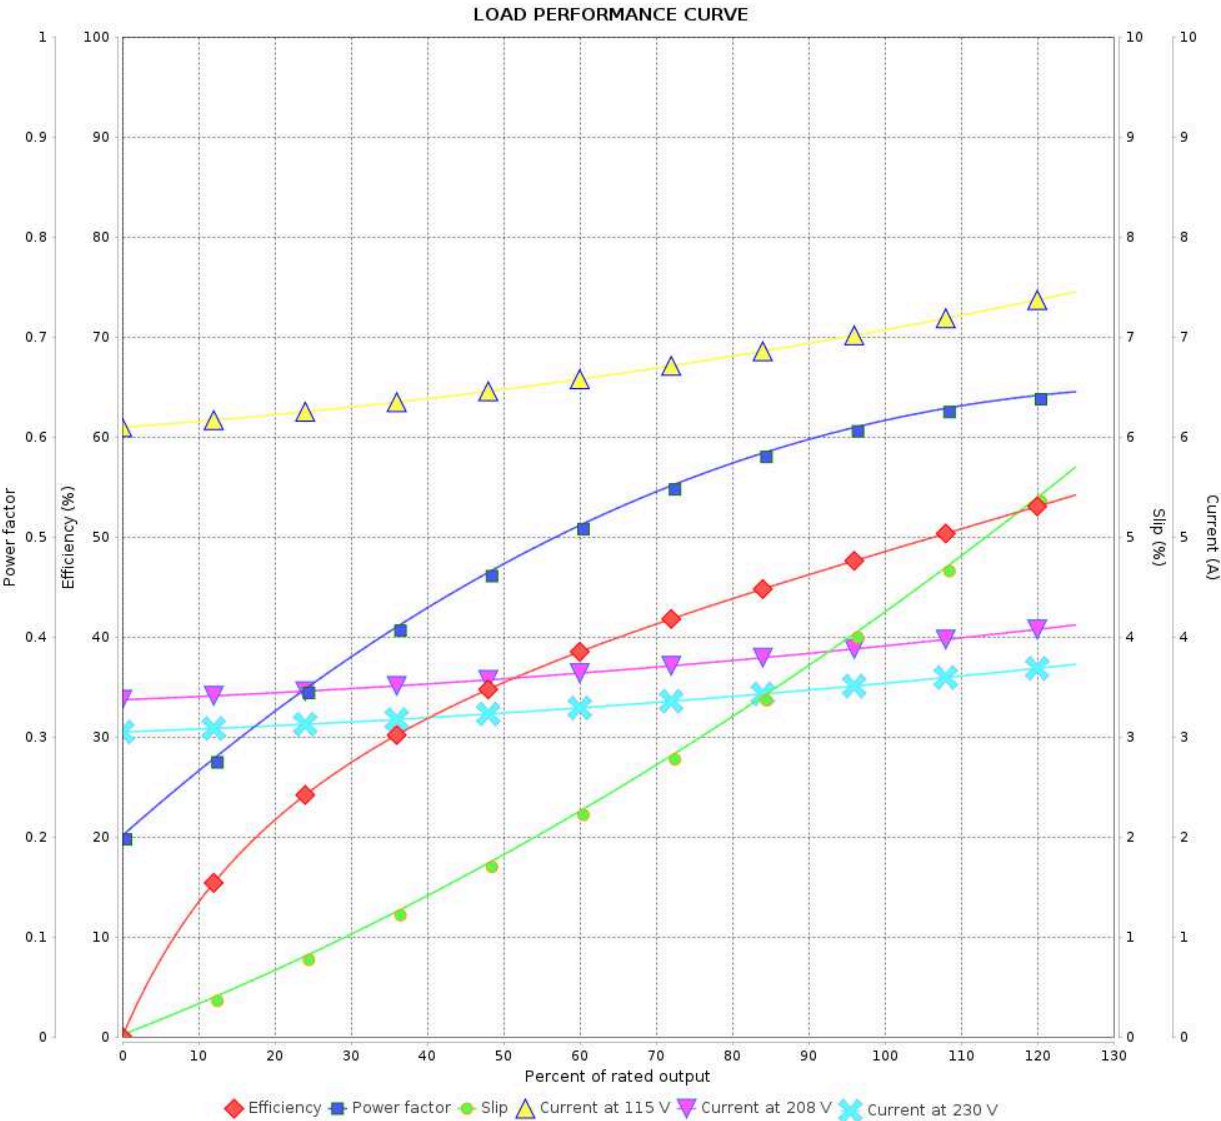

Performance : 115/208-230 V 60 Hz 2P

Rated current	: 7.00/3.10-3.50 A	Moment of inertia (J)	: 0.0062 kgm ²
LRC	: 4.0	Duty cycle	: Cont.(S1)
Rated torque	: 0.070 kgfm	Insulation class	: B
Locked rotor torque	: 270 %	Service factor	:
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 3445 rpm		

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	24/10/2024			

	1	2	3	4	5	6																																																																														
A																																																																																				
B																																																																																				
C																																																																																				
D																																																																																				
E	1/3 HP 02 Poles 60 Hz					A <table><tr><td colspan="6">Mounting B14R(D)</td></tr><tr><td colspan="6"></td></tr><tr><td colspan="6"></td></tr><tr><td></td><td></td><td colspan="3"></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td colspan="3"></td><td>HYBRISUSER</td><td></td><td></td><td></td><td>00</td></tr><tr><td>ECM</td><td>LOC</td><td colspan="3">SUMMARY OF MODIFICATIONS</td><td>EXECUTED</td><td>CHECKED</td><td>RELEASED</td><td>DATE</td><td>VER</td></tr><tr><td>EXECUTED</td><td>HYBRISUSER</td><td colspan="4" rowspan="3"> SINGLE PH. MOTOR WJET PUMP FRAME W56 IP21 ODP </td><td colspan="2">PREVIEW</td><td colspan="2" rowspan="3"></td></tr><tr><td>CHECKED</td><td></td><td colspan="2">WDD</td><td>00</td></tr><tr><td>RELEASED</td><td></td><td colspan="2"></td><td></td></tr><tr><td>REL. DATE</td><td></td><td>WMO</td><td>Jaragua do Sul</td><td>Product Engineering</td><td colspan="2">SHEET</td><td colspan="3">1 / 1</td></tr></table>	Mounting B14R(D)																																	HYBRISUSER				00	ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	EXECUTED	HYBRISUSER	SINGLE PH. MOTOR WJET PUMP FRAME W56 IP21 ODP				PREVIEW				CHECKED		WDD		00	RELEASED					REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET		1 / 1		
Mounting B14R(D)																																																																																				
					HYBRISUSER				00																																																																											
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER																																																																											
EXECUTED	HYBRISUSER	SINGLE PH. MOTOR WJET PUMP FRAME W56 IP21 ODP				PREVIEW																																																																														
CHECKED						WDD				00																																																																										
RELEASED																																																																																				
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET		1 / 1																																																																													