

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor Product code : 10084016

Frame	: W56J	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 9.30/3.90-4.65 A	Protection degree	: IP21
L. R. Amperes	: 42.8/17.9-21.4 A	Cooling method	: IC01 - ODP
LRC	: 4.6x(Code L)	Mounting	: F-1
No load current	: 7.10/3.06-3.55 A	Rotation ¹	: CCW
Rated speed	: 3465 rpm	Starting method	: Direct On Line
Slip	: 3.75 %	Approx. weight ³	: 9.0 kg
Rated torque	: 0.105 kgfm		
Locked rotor torque	: 190 %		
Breakdown torque	: 290 %		
Insulation class	: B		
Service factor	: 1.60		
Moment of inertia (J)	: 0.0080 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	44.8	53.5	58.0	Max. traction	: 5 kgf
Power Factor	0.47	0.55	0.63	Max. compression	: 14 kgf

		Drive end	Non drive end
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	Slinger	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	24/10/2024			


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :


Product line : Wjet Pump Single-Phase Start Capacitor Product code : 10084016

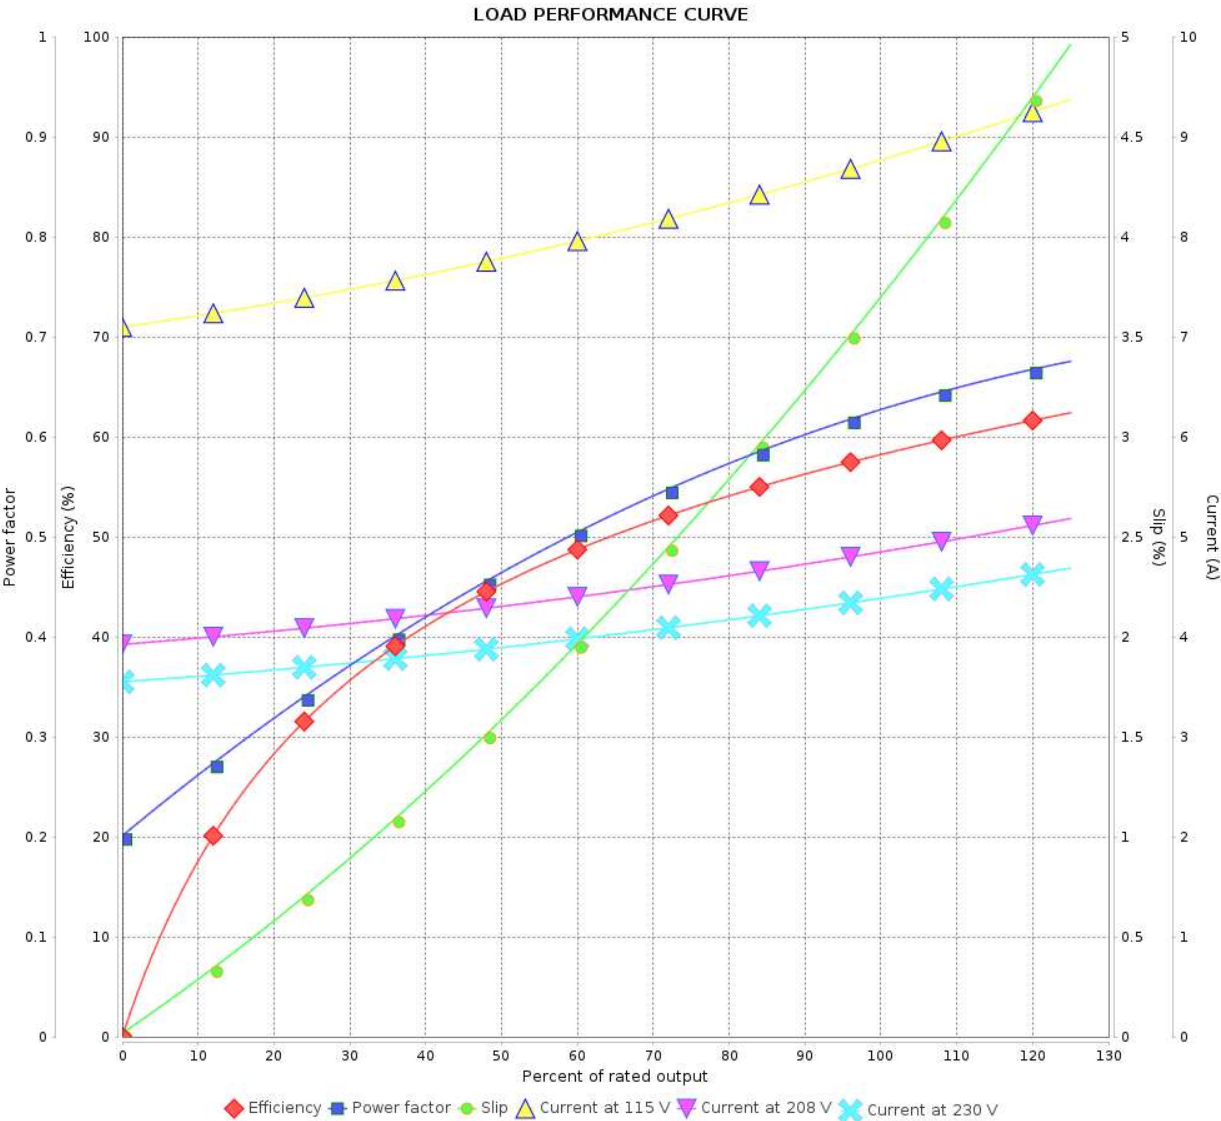


Performance : 115/208-230 V 60 Hz 2P

Rated current	: 9.30/3.90-4.65 A	Moment of inertia (J)	: 0.0080 kgm ²
LRC	: 4.6	Duty cycle	: Cont.(S1)
Rated torque	: 0.105 kgfm	Insulation class	: B
Locked rotor torque	: 190 %	Service factor	:
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 3465 rpm		

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2 Revision		
Checked by				
Date	24/10/2024			

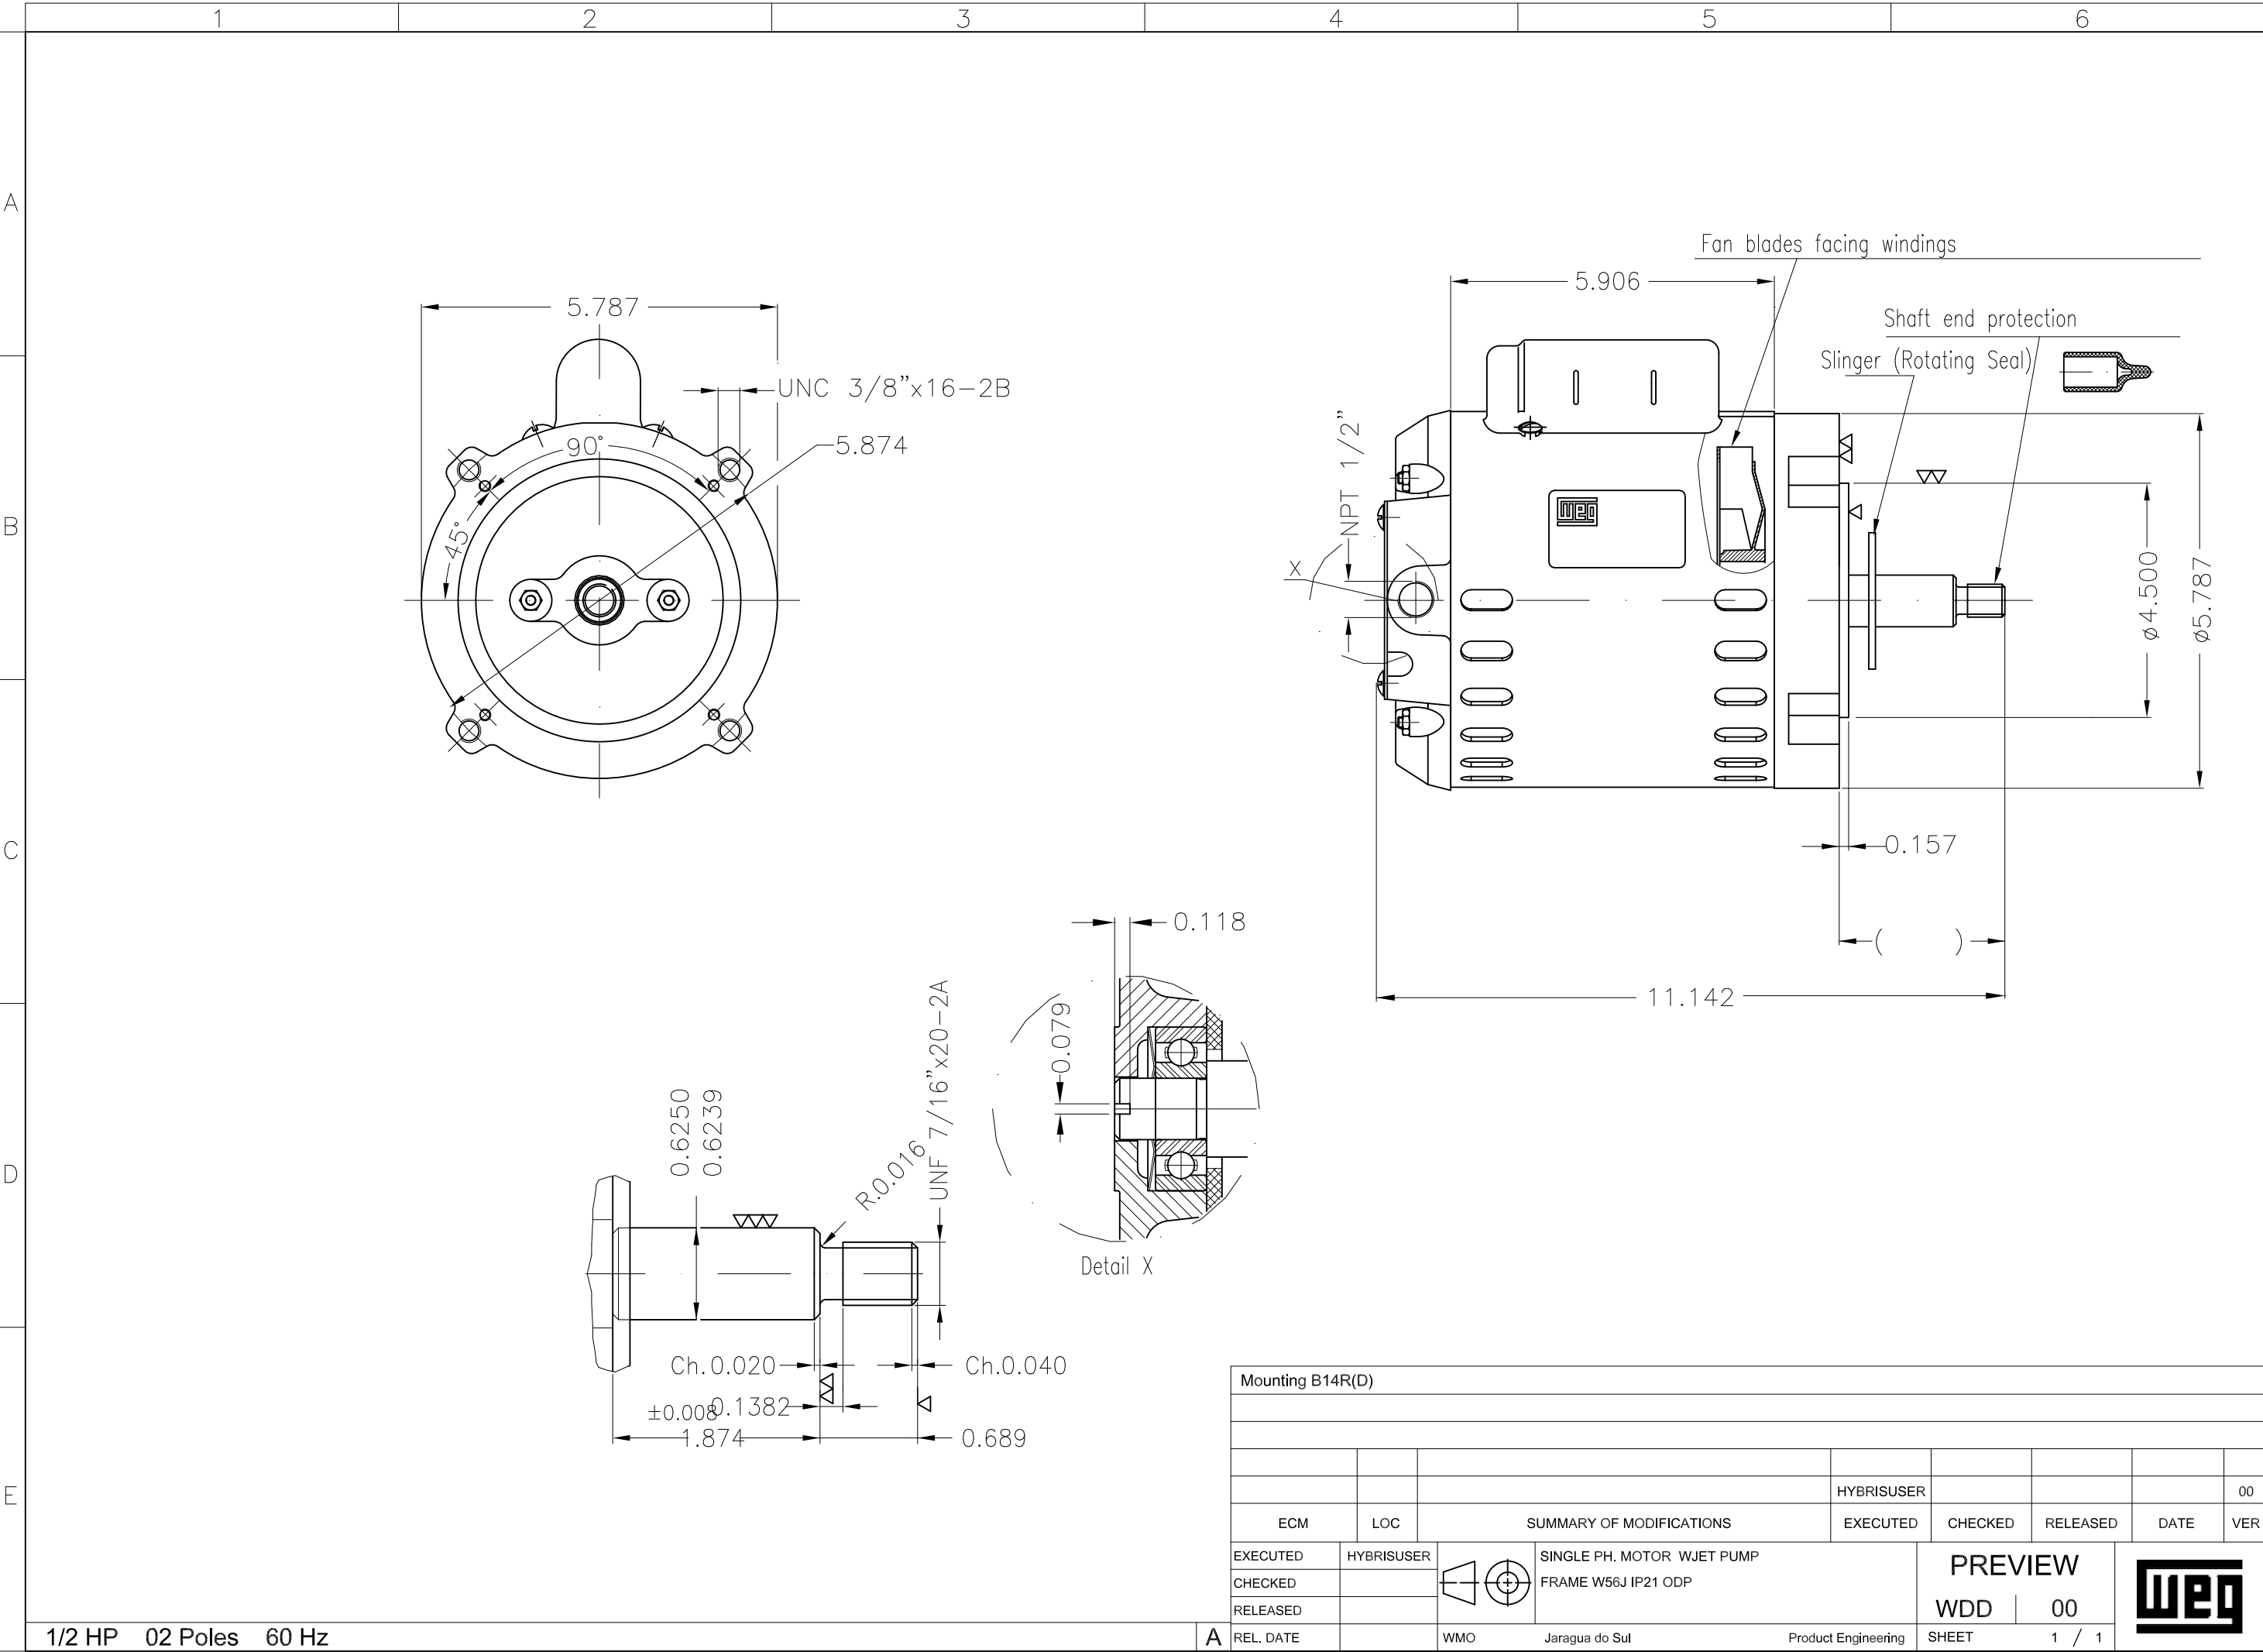

Mounting B14R(D)									
						HYBRISUSER			00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE VER
EXECUTED	HYBRISUSER		SINGLE PH. MOTOR WJET PUMP FRAME W56J IP21 ODP				PREVIEW		
CHECKED							WDD 00		
RELEASED									
REL. DATE							1 / 1		
		WMO	Jaragua do Sul			Product Engineering	SHEET		