

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 13393207

Frame : 254/6JP
Insulation class : F
Duty cycle : Cont.(S1)
Ambient temperature : -20°C to +40°C
Altitude : 1000 m.a.s.l.
Protection degree : IP55
Design : B

Cooling method : IC411 - TEFC
Mounting : F-1
Rotation¹ : Both (CW and CCW)
Starting method : Direct On Line
Approx. weight³ : 104 kg
Moment of inertia (J) : 0.0904 kgm²

Output [HP]	15	15	15
Poles	4	4	4
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	36.4/18.2	43.8/21.9	39.4/20.9
L. R. Amperes [A]	237/118	241/120	240/127
LRC [A]	6.5x(Code G)	5.5x(Code F)	6.1x(Code G)
No load current [A]	17.3/8.65	17.1/8.53	17.5/9.28
Rated speed [RPM]	1770	1455	1460
Slip [%]	1.67	3.00	2.67
Rated torque [kgfm]	6.15	7.48	7.46
Locked rotor torque [%]	250	190	210
Breakdown torque [%]	300	229	260
Service factor	1.15	1.00	1.00
Temperature rise	80 K	105 K	105 K
Locked rotor time	34s (cold) 19s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level ²	68.0 dB(A)	65.0 dB(A)	65.0 dB(A)
Efficiency (%)	25%	90.8	92.5
	50%	91.0	91.5
	75%	92.4	91.2
	100%	92.4	91.4
Power Factor	25%	0.39	0.45
	50%	0.64	0.71
	75%	0.76	0.81
	100%	0.82	0.85

Bearing type : Drive end 6309 Z C3 Non drive end 6208 Z C3
Sealing : V'Ring Without Bearing Seal
Lubrication interval : 20000 h 20000 h
Lubricant amount : 13 g 8 g
Lubricant type : Mobil Polyrex EM

Foundation loads
Max. traction : 253 kgf
Max. compression : 357 kgf

Notes

USABLE @208V 40.2A SF 1.00 SFA 40.2A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 4		
Checked by				
Date	16/05/2022			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 13393207

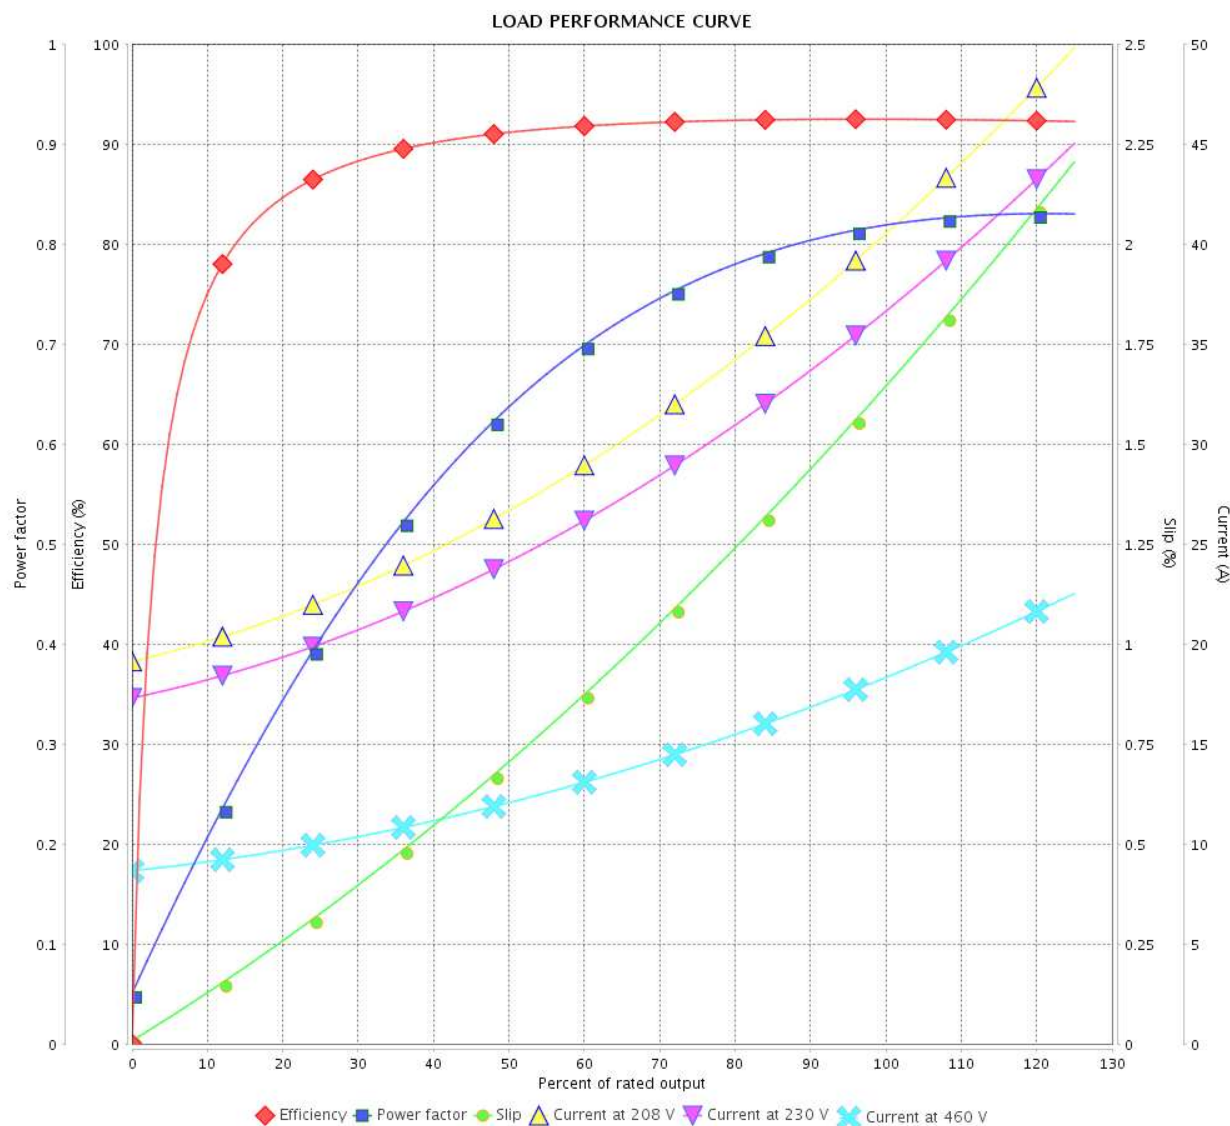

Performance : 230/460 V 60 Hz 4P

Rated current : 36.4/18.2 A
LRC : 6.5
Rated torque : 6.15 kgfm
Locked rotor torque : 250 %
Breakdown torque : 300 %
Rated speed : 1770 rpm

Moment of inertia (J) : 0.0904 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 4	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 13393207

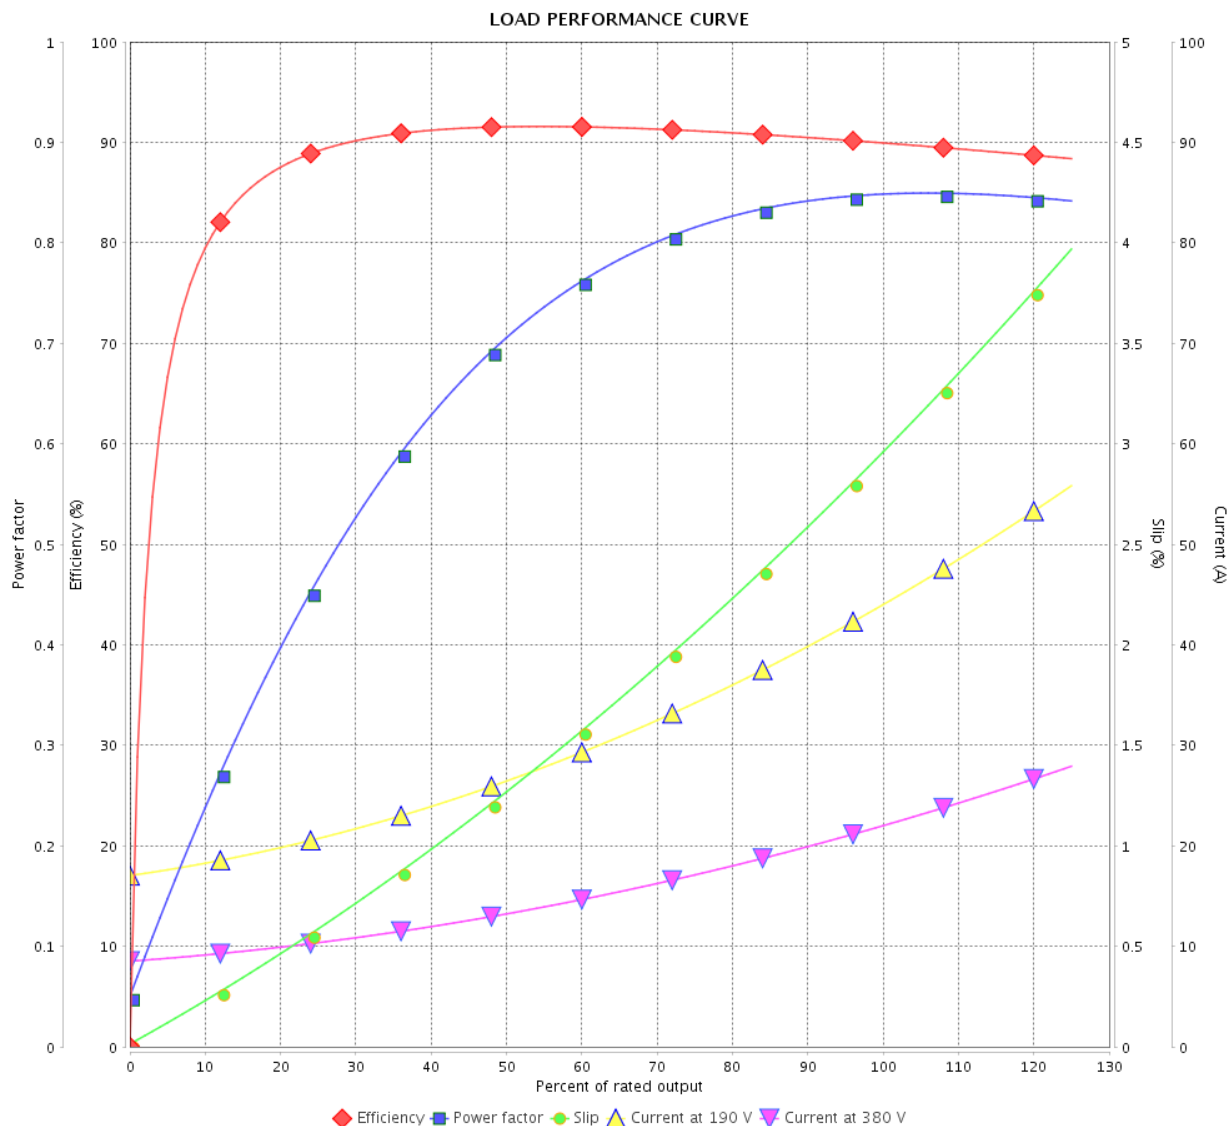

Performance : 190/380 V 50 Hz 4P

Rated current : 43.8/21.9 A
LRC : 5.5
Rated torque : 7.48 kgfm
Locked rotor torque : 190 %
Breakdown torque : 229 %
Rated speed : 1455 rpm

Moment of inertia (J) : 0.0904 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 4		
Checked by				
Date	16/05/2022			
		Revision		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 13393207

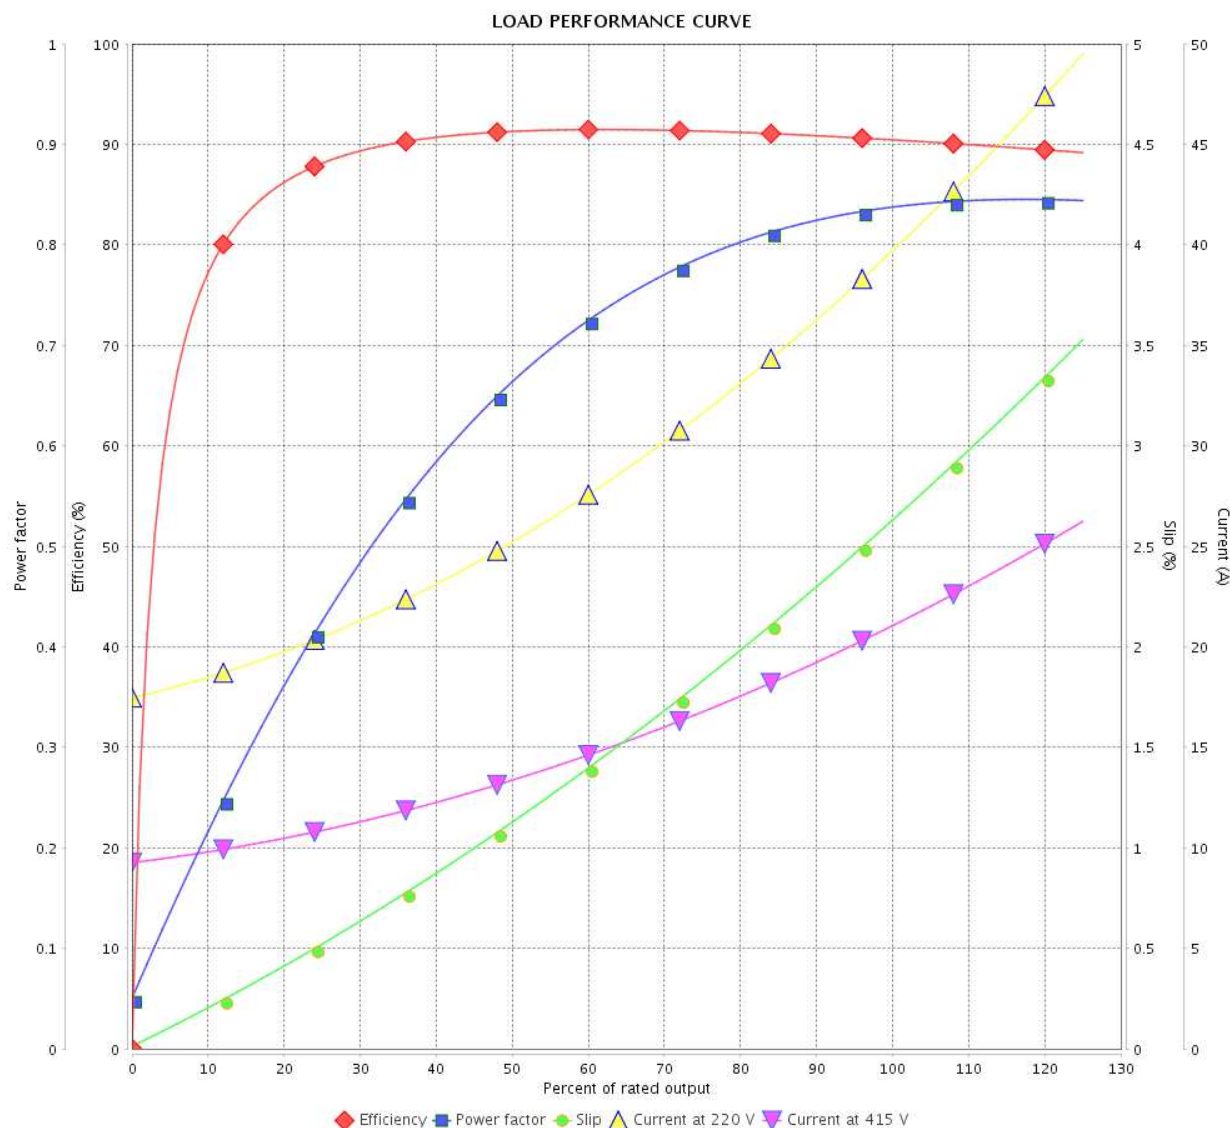



Performance : 220/415 V 50 Hz 4P

Rated current : 39.4/20.9 A
LRC : 6.1
Rated torque : 7.46 kgfm
Locked rotor torque : 210 %
Breakdown torque : 260 %
Rated speed : 1460 rpm

Moment of inertia (J) : 0.0904 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 4 / 4	Revision
Checked by					
Date	16/05/2022				

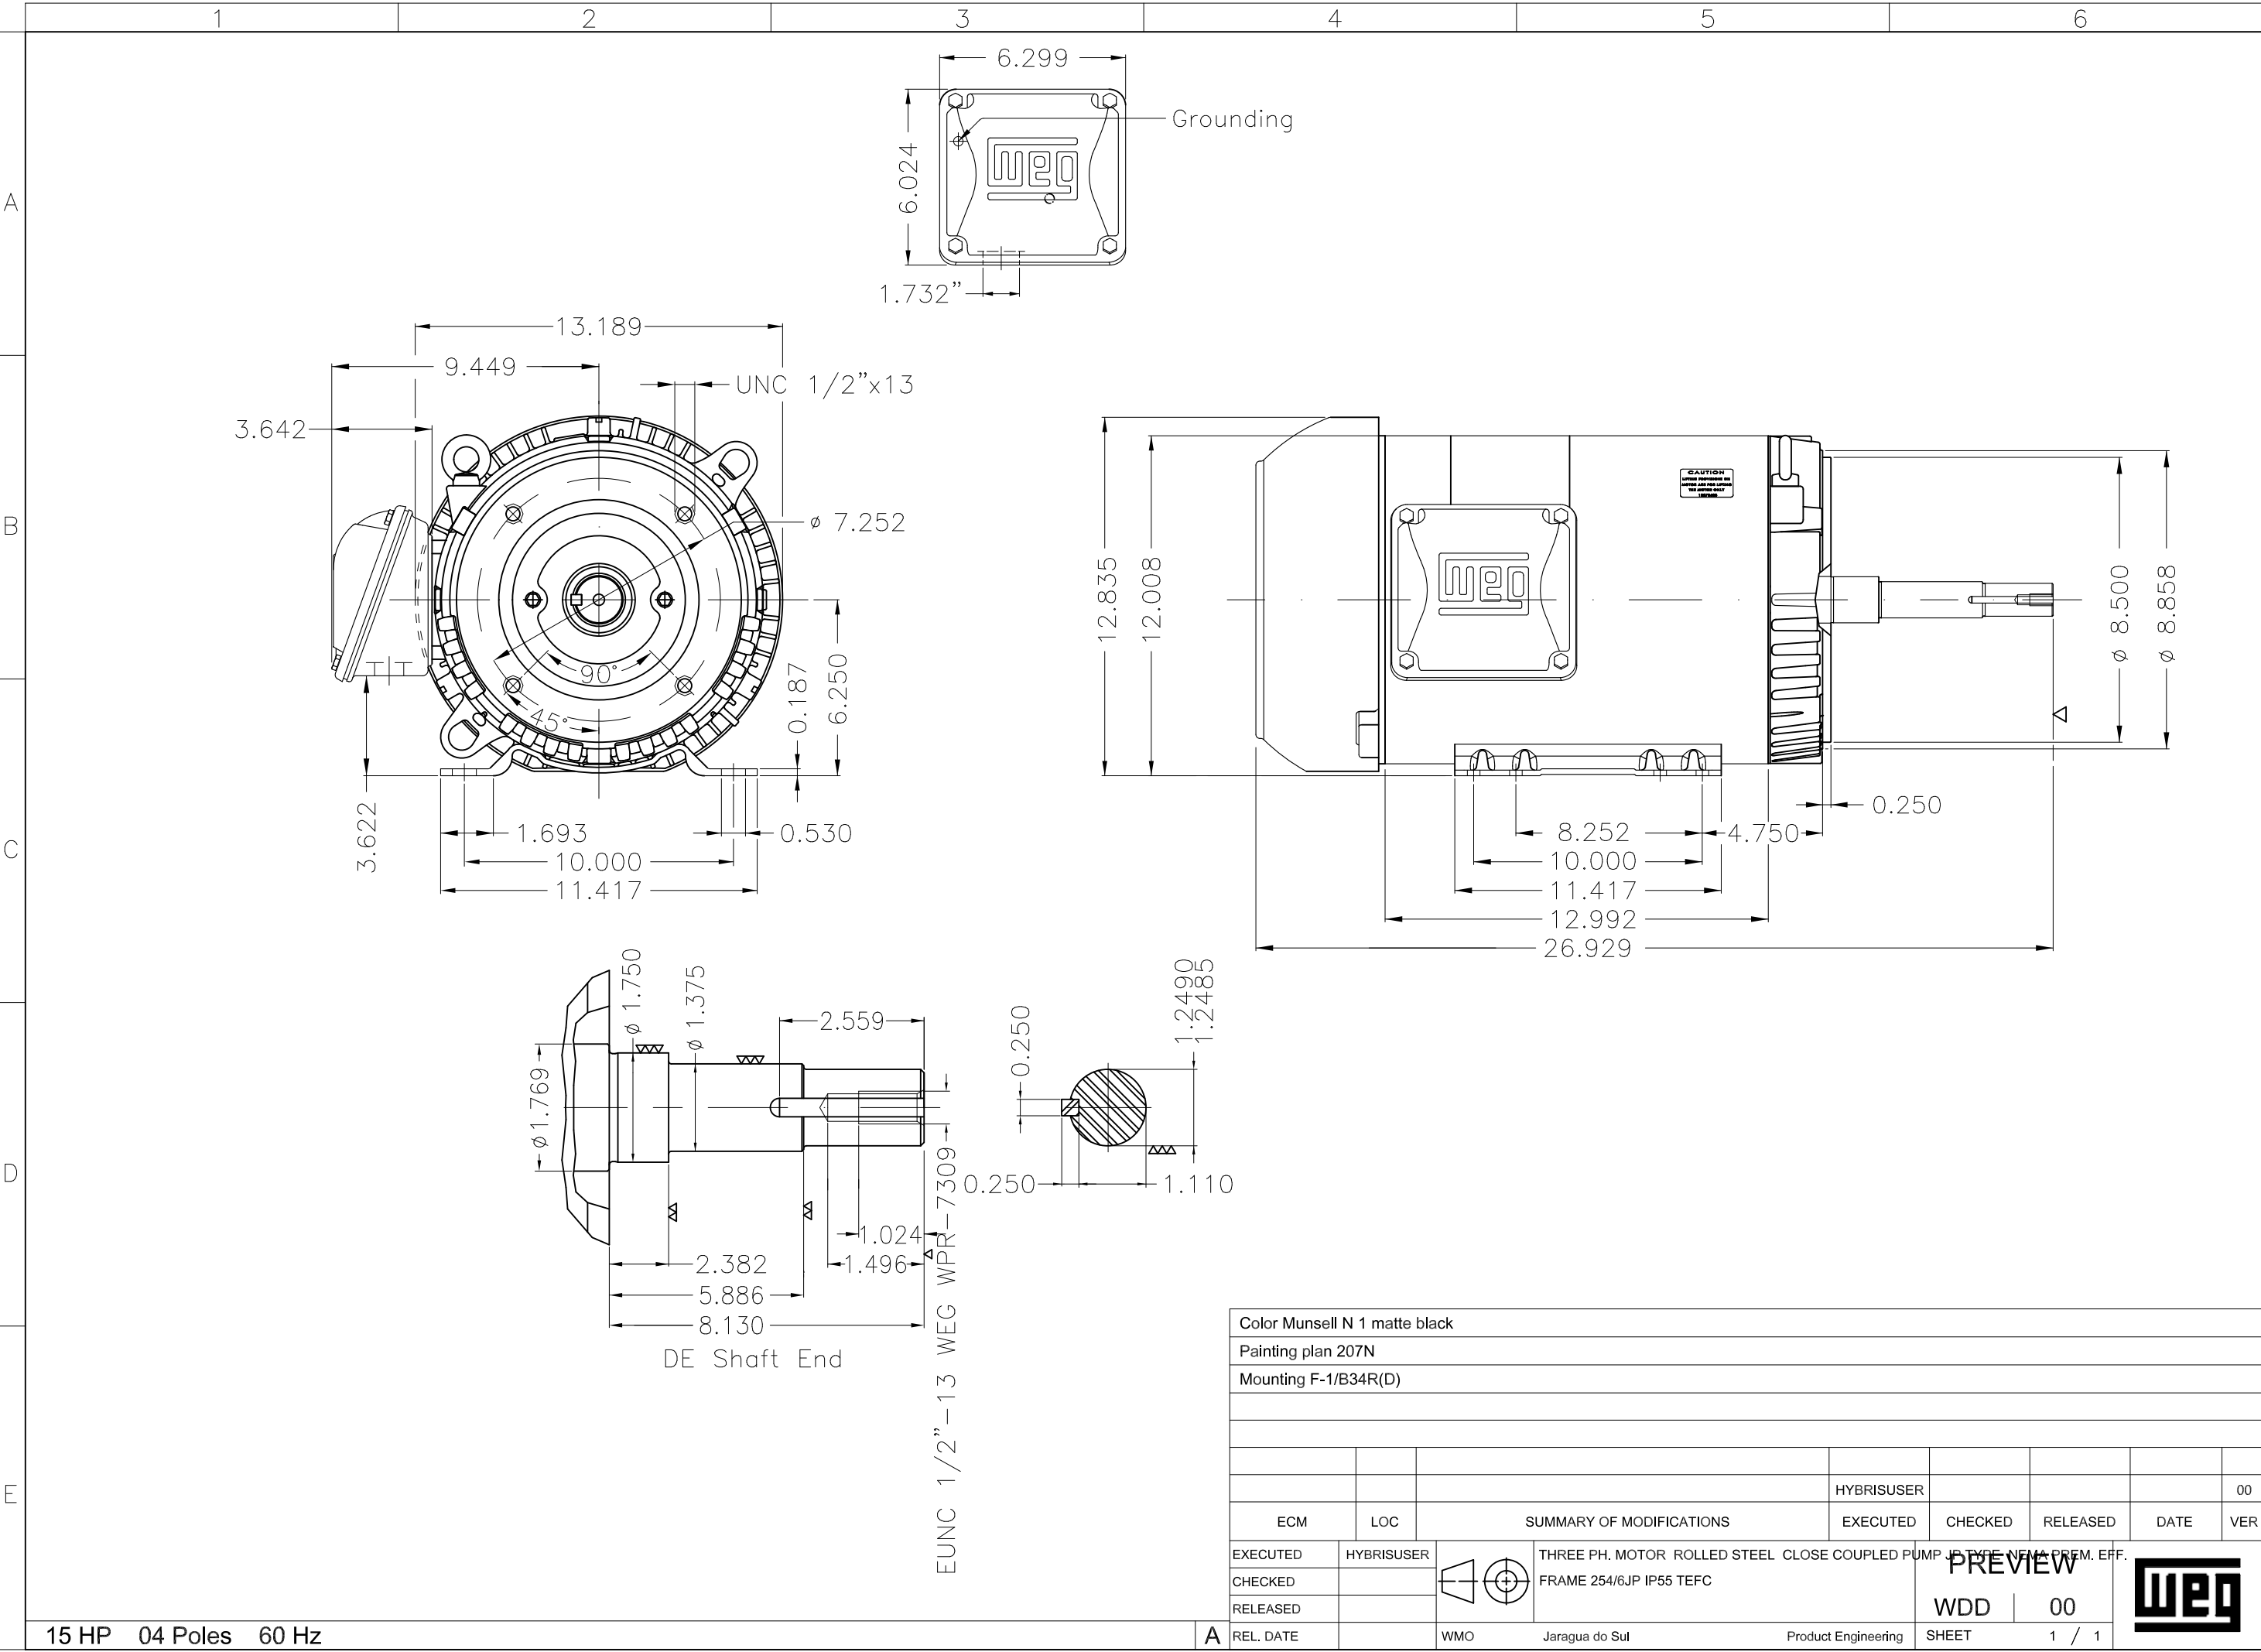

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting F-1/B34R(D)									
				HYBRISUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR ROLLED STEEL CLOSE COUPLED PUMP 1/2 TYPE NEMA PREM. EFF. FRAME 254/6JP IP55 TEFC			PREVIEW WDD 00			
CHECKED									
RELEASED									
REL. DATE	WMO								