

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-Phase
Product code : 12712151

Frame	: 284/6JP	Locked rotor time	: 30s (cold) 17s (hot)
Output	: 25 HP (18.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 23.0 A	Protection degree	: IP55
L. R. Amperes	: 145 A	Cooling method	: IC411 - TEFC
LRC	: 6.3x(Code G)	Mounting	: F-1
No load current	: 5.82 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3545 rpm	Noise level ²	: 72.0 dB(A)
Slip	: 1.53 %	Starting method	: Direct On Line
Rated torque	: 5.11 kgfm	Approx. weight ³	: 177 kg
Locked rotor torque	: 200 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.1135 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	91.0	91.7	91.7	Max. traction	: 80 kgf
Power Factor	0.78	0.85	0.88	Max. compression	: 256 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.6	6.5	5.6	4.4	2.5	1.6	0.9

	Drive end	Non drive end
Bearing type	: 6311 C3	: 6211 C3
Sealing	: V'Ring	: V'Ring
Lubrication interval	: 14000 h	: 17000 h
Lubricant amount	: 18 g	: 11 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	24/10/2024			

Page 1 / 2
Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-
Phase

Product code : 12712151

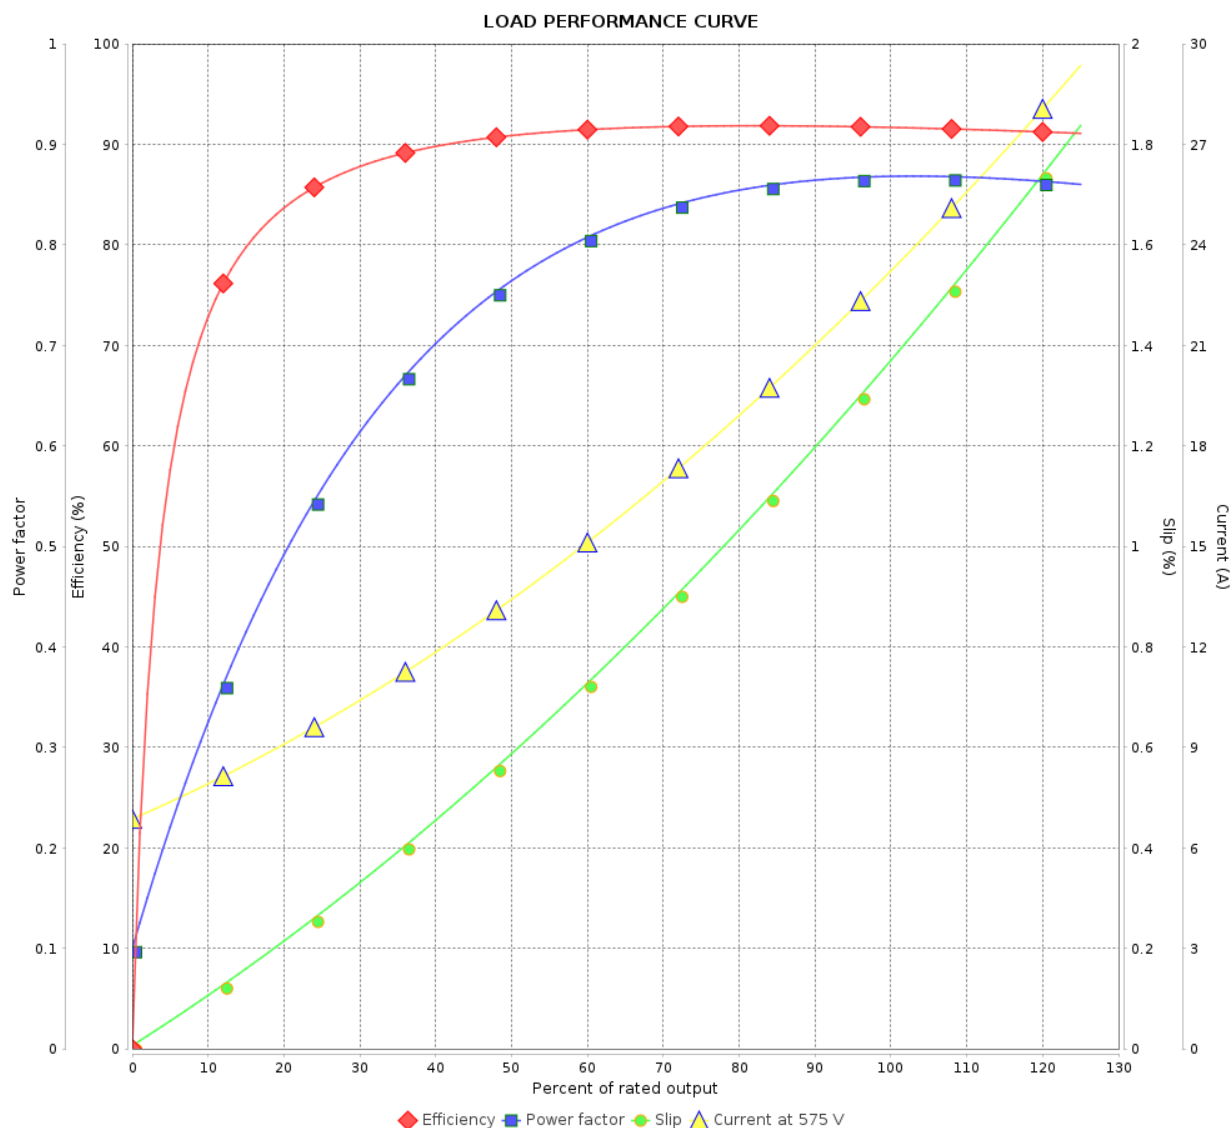


Performance : 575 V 60 Hz 2P

Rated current : 23.0 A
LRC : 6.3
Rated torque : 5.11 kgfm
Locked rotor torque : 200 %
Breakdown torque : 229 %
Rated speed : 3545 rpm

Moment of inertia (J) : 0.1135 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 2 / 2		Revision	
Checked by					
Date	24/10/2024				

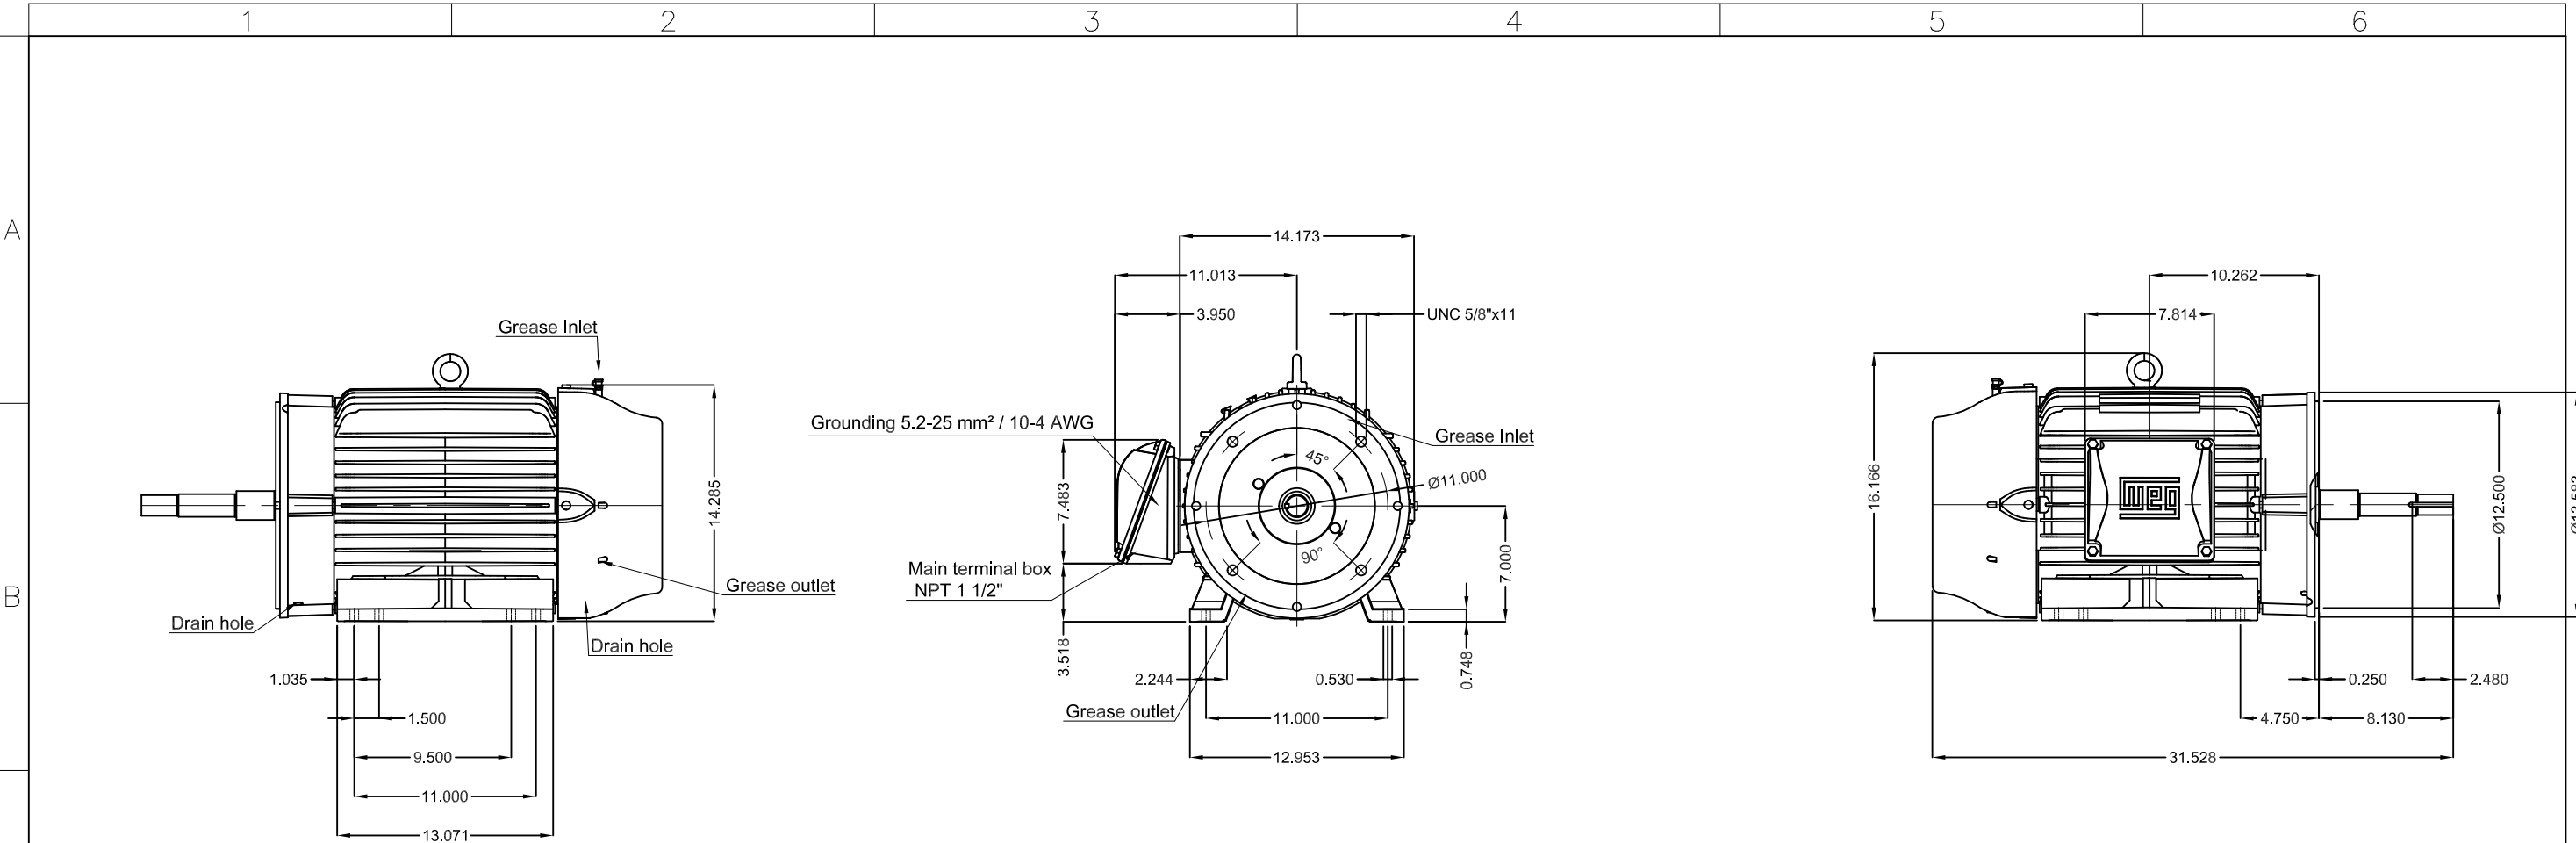

Without vertical jackscrews

Color RAL 5009

Painting plan 203A

Mounting NEMA F-1

Mounting B34R(D)

Ø2.163

Ø1.750

Ø1.375

0.984

1.496

2.382

5.886

8.130

DE Shaft End

0.250

0.250

1.2496

1.110

EUNC 1/2"-13 WEG WPR-7309

25 HP 02 Poles 60 Hz

ECM

LOC

SUMMARY OF MODIFICATIONS

EXECUTED

CHECKED

RELEASED

DATE

VER

HYBRISUSER

00

THREE PH. MOTOR JM/JP/JET PUMP W22 NEMA PREM. EFF. FRAME 284/6JP IP55 TEFC

PREVIEW

WDD

00

SHEET

/