

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Jet Pump - J type Premium Efficiency Three-Phase		Product code : 15942858
Frame	: W56J	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: W-6	
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 7.9 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0008 kgm ²	
Output [HP]	0.5			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	0.627			
L. R. Amperes [A]	4.83			
LRC [A]	7.7x(Code L)			
No load current [A]	0.334			
Rated speed [RPM]	3435			
Slip [%]	4.58			
Rated torque [kgfm]	0.106			
Locked rotor torque [%]	330			
Breakdown torque [%]	360			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	32s (cold) 18s (hot)			
Noise level ²	65.0 dB(A)			
Efficiency (%)	25%			
	50%	68.0		
	75%	72.0		
	100%	74.0		
Power Factor	25%			
	50%	0.64		
	75%	0.75		
	100%	0.80		
Bearing type	: Drive end 6203 2RS Non drive end 6202 2RS	Foundation loads		
Sealing	: V'Ring V'Ring	Max. traction : 8 kgf		
Lubrication interval	: - -	Max. compression : 16 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	16/05/2022		Page 1 / 2	Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Premium
Efficiency Three-Phase

Product code : 15942858

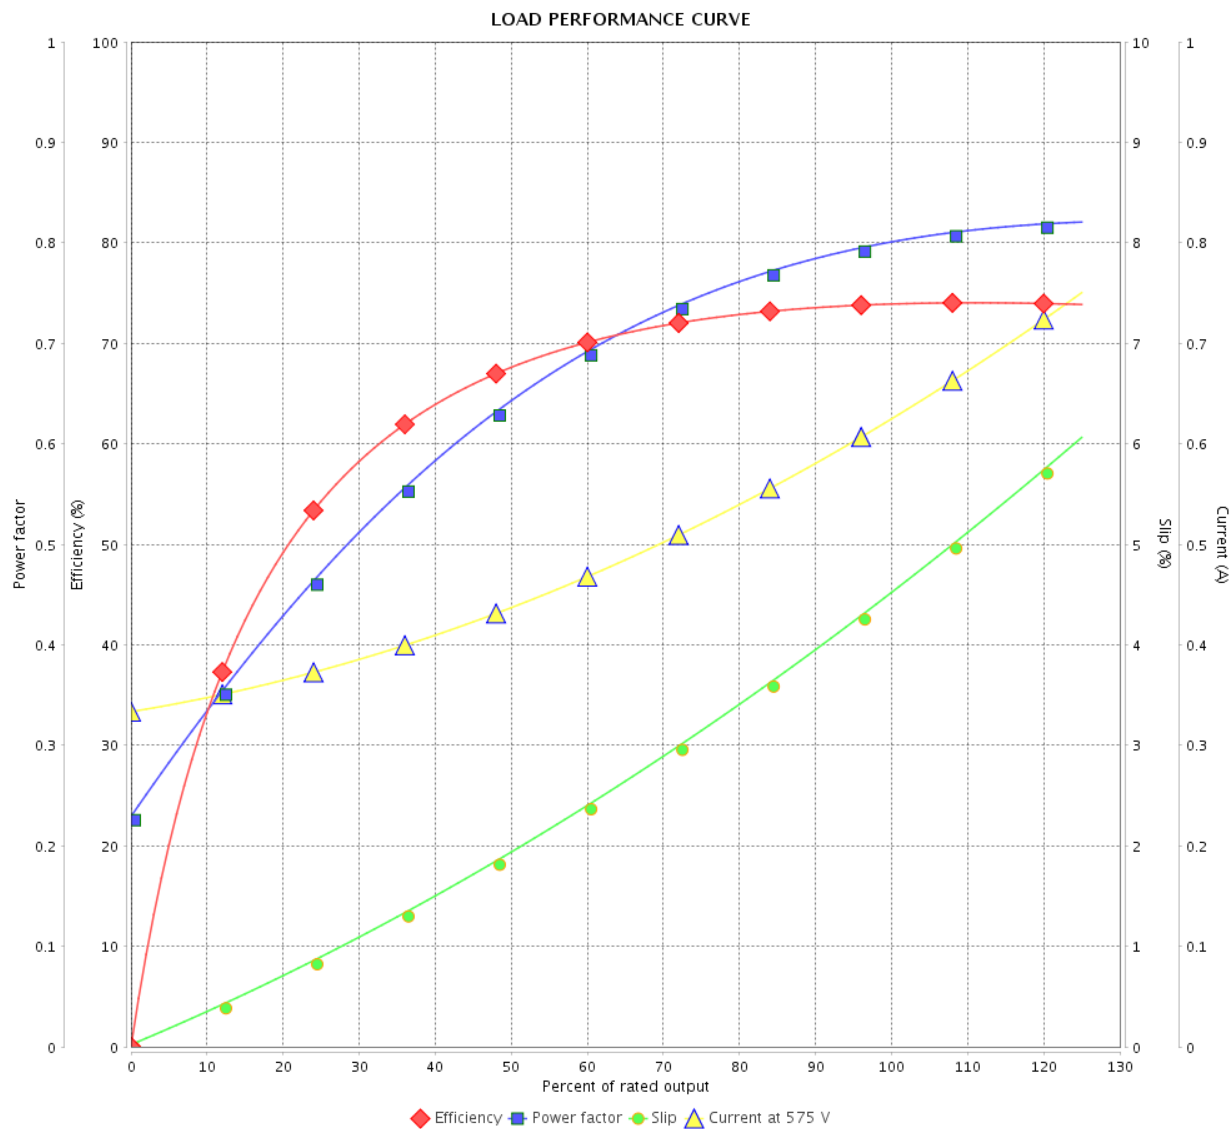

Performance : 575 V 60 Hz 2P

Rated current : 0.627 A
LRC : 7.7
Rated torque : 0.106 kgfm
Locked rotor torque : 330 %
Breakdown torque : 360 %
Rated speed : 3435 rpm

Moment of inertia (J) : 0.0008 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	16/05/2022			

