DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Jet Pump - C type Three-Phase Product code : 13722358

Frame	: 56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation[1]	: CCW
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight[3]	: 15.4 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0043 kgm²
Design	: B		

Output [HP]		1.5	1.5	1.5
Poles		2	2	2
Frequency [Hz]		60	50	50
Rated voltage [V]		230/460	190/380	220/415
Rated current [A]		3.74/1.87	4.44/2.22	3.90/2.07
L. R. Amperes [A]		34.0/17.0	32.0/16.0	33.2/17.6
LRC [A]		9.1x(Code L)	7.2x(Code H)	8.5x(Code K)
No load current [A]		1.72/0.859	1.69/0.845	1.83/0.971
Rated speed [RPM]		3520	2895	2915
Slip [%]		2.22	3.50	2.83
Rated torque [kgfm]		0.309	0.376	0.373
Locked rotor torque [%]		229	190	240
Breakdown torque [%]		300	280	330
Service factor			1.15	1.15
Temperature rise		80 K	80 K	80 K
Locked rotor time		30s (cold) 17s (hot)	28s (cold) 16s (hot)	25s (cold) 14s (hot)
Noise level[2]		68.0 dB(A)	65.0 dB(A)	65.0 dB(A)
Efficiency (%)	25%			
	50%	80.0	82.6	81.7
	75%	82.5	83.8	84.0
	100%	84.0	82.9	83.9
Power Factor	25%			
	50%	0.71	0.77	0.70
	75%	0.82	0.87	0.82
	100%	0.88	0.91	0.88

		Drive end	Non drive end
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 32 kgf

Max. compression : 47 kgf

Notes

USABLE @208V 4.13A SF 1.00 SFA 4.13A

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

(2) Measured at 1m and with tolerance of +3dB(A).

(3) Approximate weight subject to changes after manufacturing process.

(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Jet Pump - C type Three-Phase	Product code :	13722358

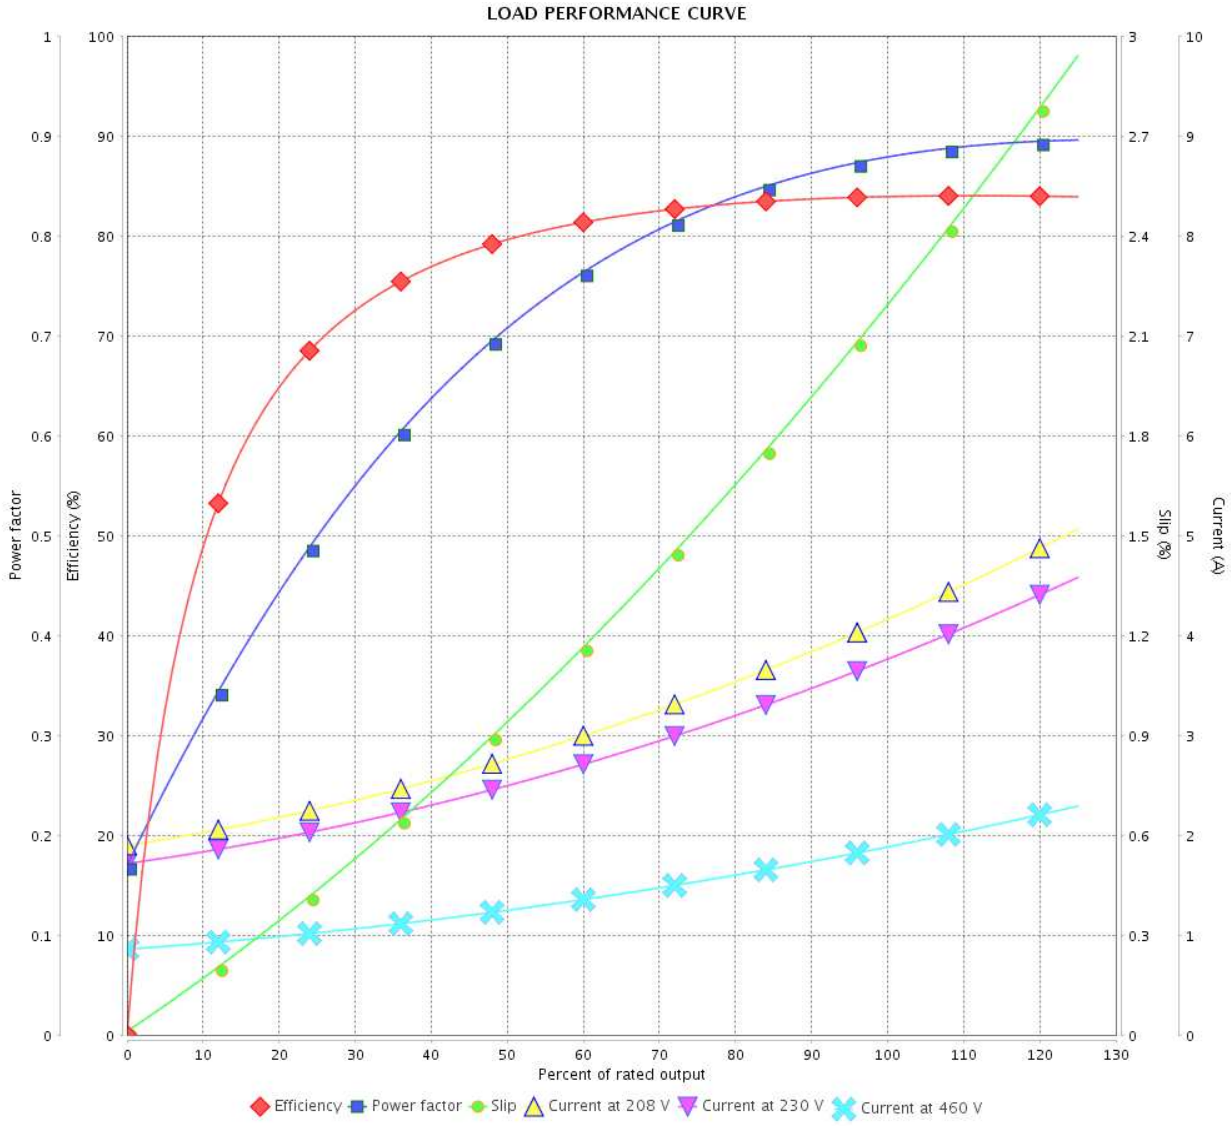

Performance	: 230/460 V 60 Hz 2P		
Rated current	: 3.74/1.87 A	Moment of inertia (J)	: 0.0043 kgm²
LRC	: 9.1	Duty cycle	: Cont.(S1)
Rated torque	: 0.309 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	:
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 3520 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		2 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Jet Pump - C type Three-Phase	Product code :	13722358

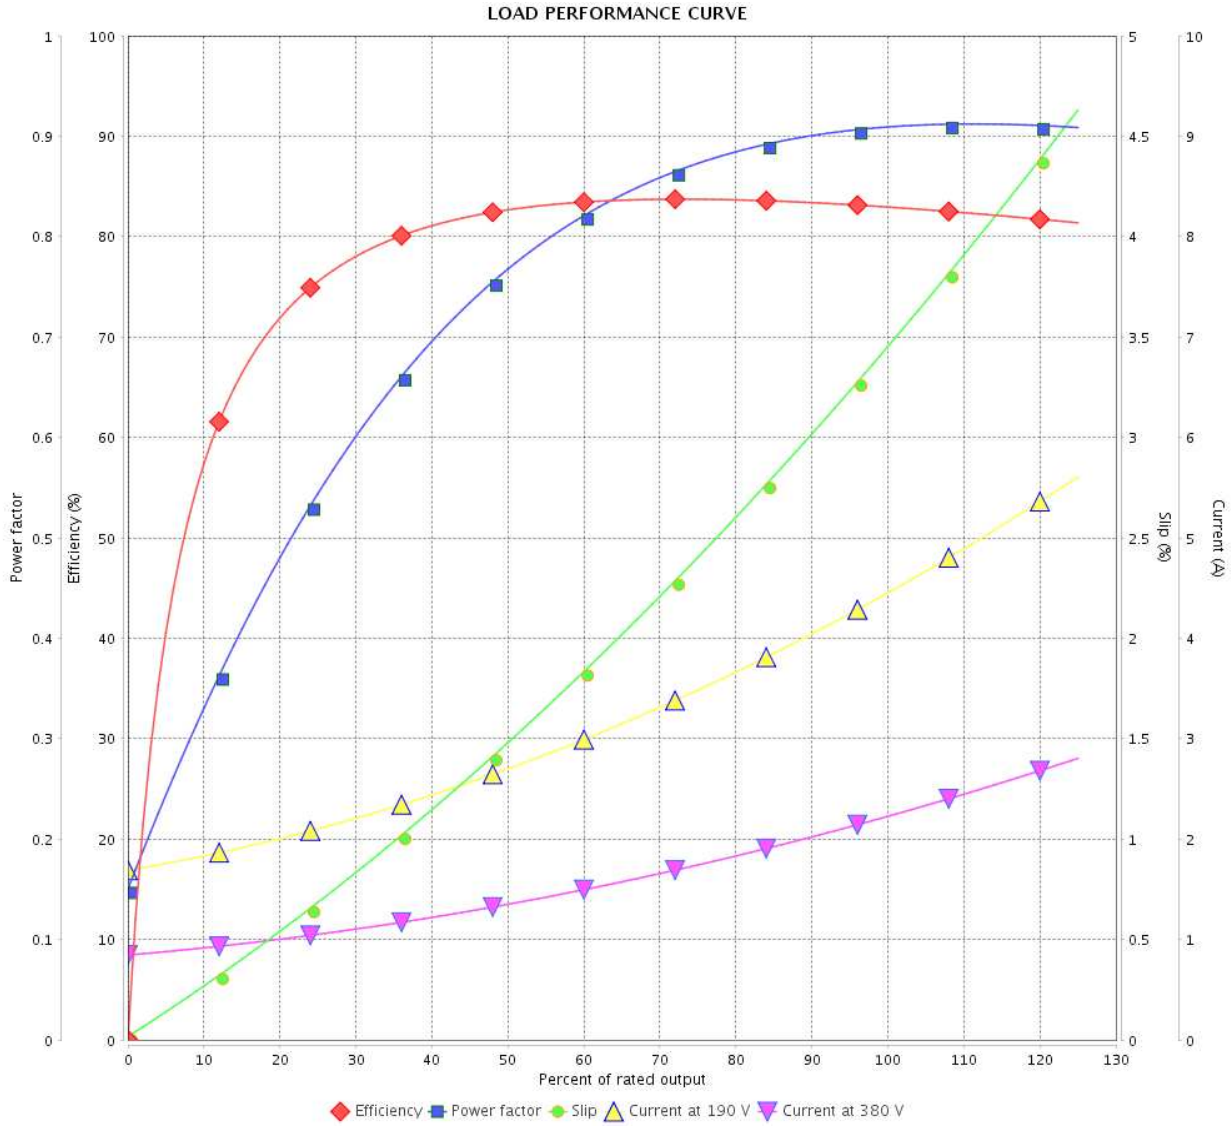

Performance	: 190/380 V 50 Hz 2P		
Rated current	: 4.44/2.22 A	Moment of inertia (J)	: 0.0043 kgm²
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 0.376 kgfm	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 2895 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		3 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Jet Pump - C type Three-Phase	Product code :	13722358

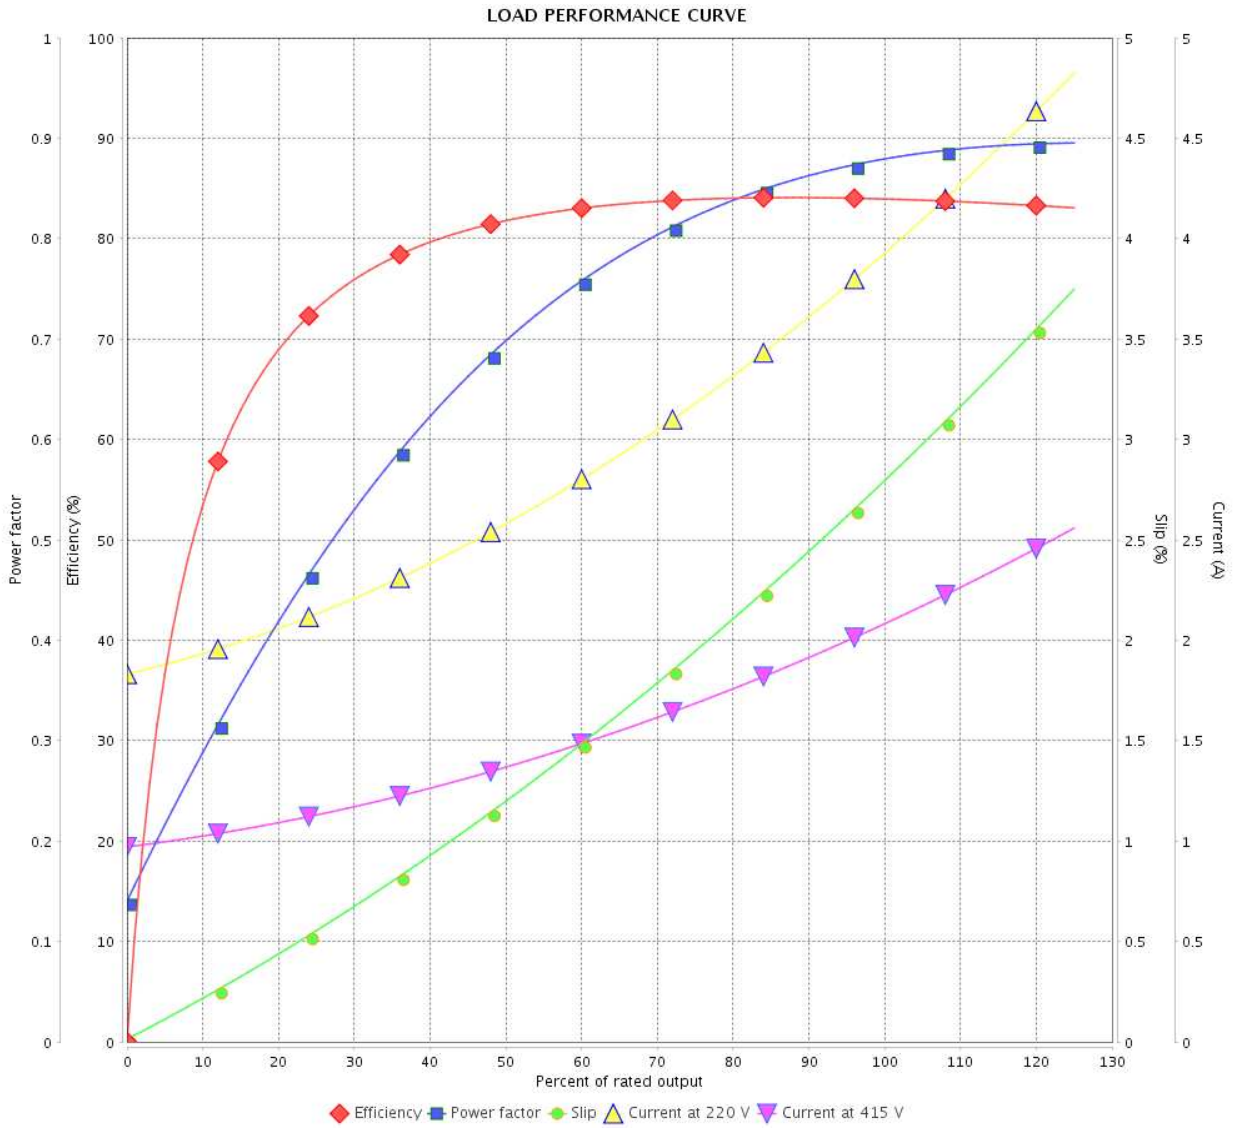



Performance	: 220/415 V 50 Hz 2P		
Rated current	: 3.90/2.07 A	Moment of inertia (J)	: 0.0043 kgm²
LRC	: 8.5	Duty cycle	: Cont.(S1)
Rated torque	: 0.373 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 2915 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		4 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

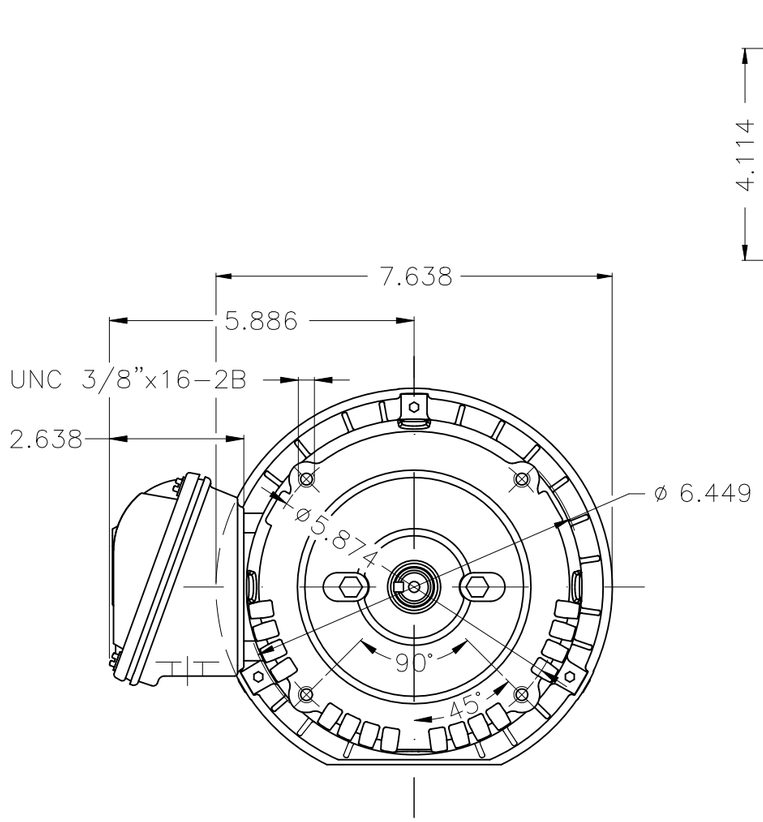

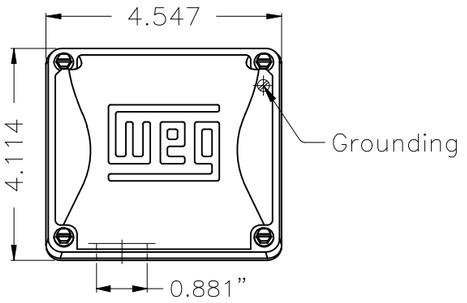

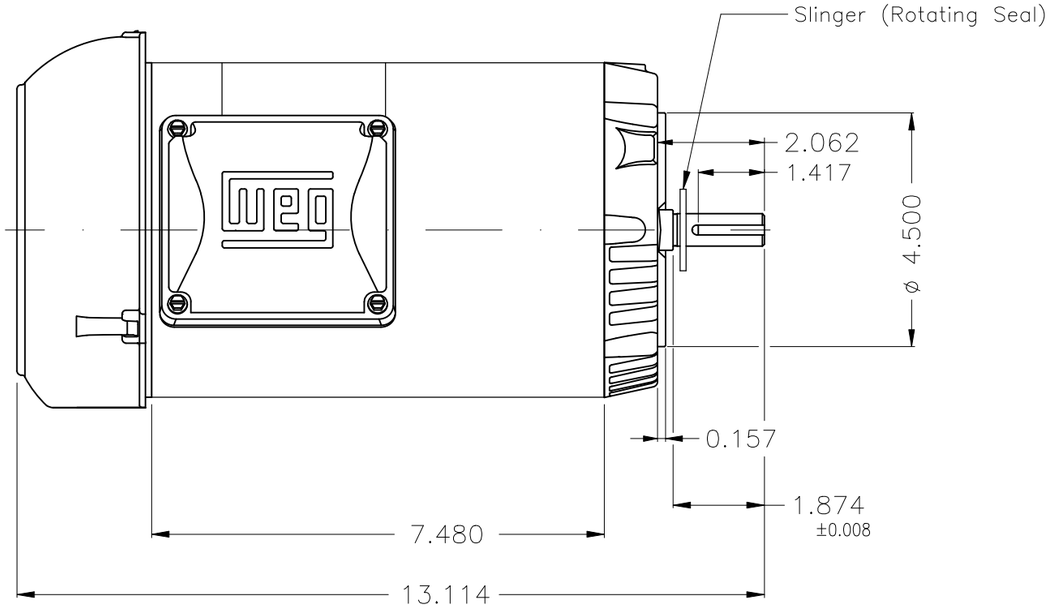



NDE sealing - V ring

Color Munsell N 1 matte black

Painting plan 207N

Mounting W-6/V18R(D)

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL JET PUMP KEYED PREM. EFF	PREVIEW
CHECKED		FRAME 56C IP55 TEFC	WDD 00
RELEASED			
REL. DATE		WMO Jaragua do Sul Product Engineering	SHEET 1 / 1

1.5 HP 02 Poles 60 Hz

A

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.