

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase Product code : 13722360

Frame	: 56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 17.7 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0054 kgm ²
Design	: B		

Output [HP]	2	2	2
Poles	2	2	2
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	4.94/2.47	5.94/2.97	5.23/2.77
L. R. Amperes [A]	48.9/24.5	44.0/22.0	46.0/24.4
LRC [A]	9.9x(Code L)	7.4x(Code J)	8.8x(Code K)
No load current [A]	2.13/1.06	2.10/1.05	2.27/1.20
Rated speed [RPM]	3520	2875	2900
Slip [%]	2.22	4.17	3.33
Rated torque [kgfm]	0.412	0.505	0.501
Locked rotor torque [%]	250	229	280
Breakdown torque [%]	300	280	340
Service factor		1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	23s (cold) 13s (hot)	21s (cold) 12s (hot)	18s (cold) 10s (hot)
Noise level ²	68.0 dB(A)	65.0 dB(A)	65.0 dB(A)
Efficiency (%)	25%		
	50%	82.5	83.3
	75%	85.5	84.9
	100%	85.5	84.5
Power Factor	25%		
	50%	0.73	0.73
	75%	0.83	0.84
	100%	0.89	0.89

	Drive end	Non drive end	Foundation loads
Bearing type	: 6203 2RS	6202 2RS	Max. traction : 46 kgf
Sealing	: V'Ring	V'Ring	Max. compression : 63 kgf
Lubrication interval	: -	-	
Lubricant amount	: -	-	
Lubricant type	: Mobil Polyrex EM		

Notes

USABLE @208V 5.46A SF 1.00 SFA 5.46A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	17/05/2022			

Page 1 / 4
Revision


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase Product code : 13722360

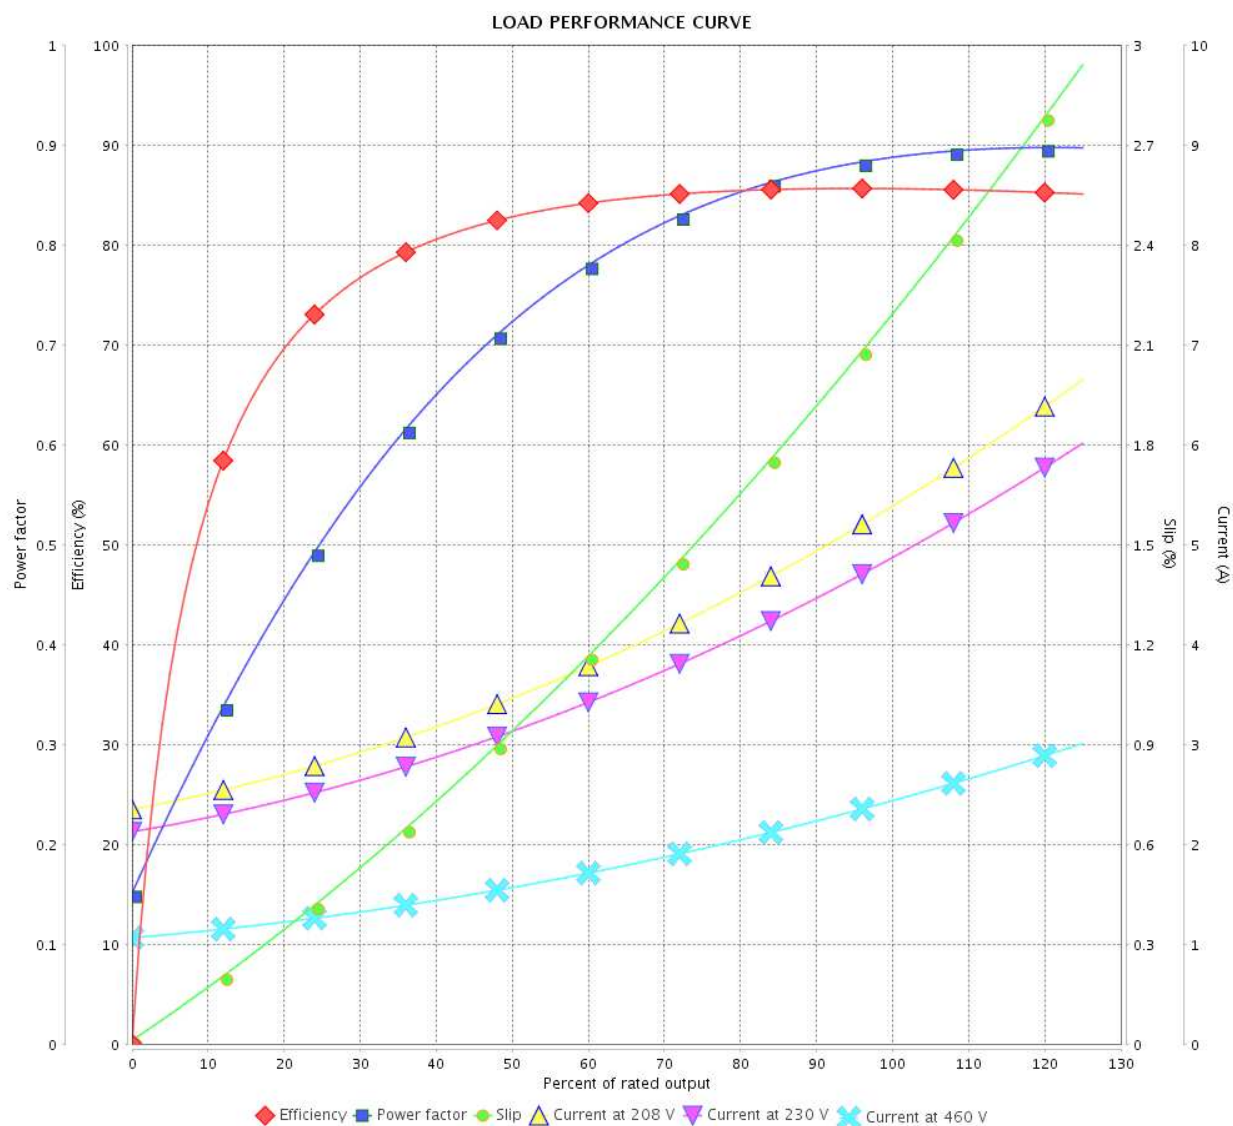

Performance : 230/460 V 60 Hz 2P

Rated current : 4.94/2.47 A
 LRC : 9.9
 Rated torque : 0.412 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 4	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 13722360

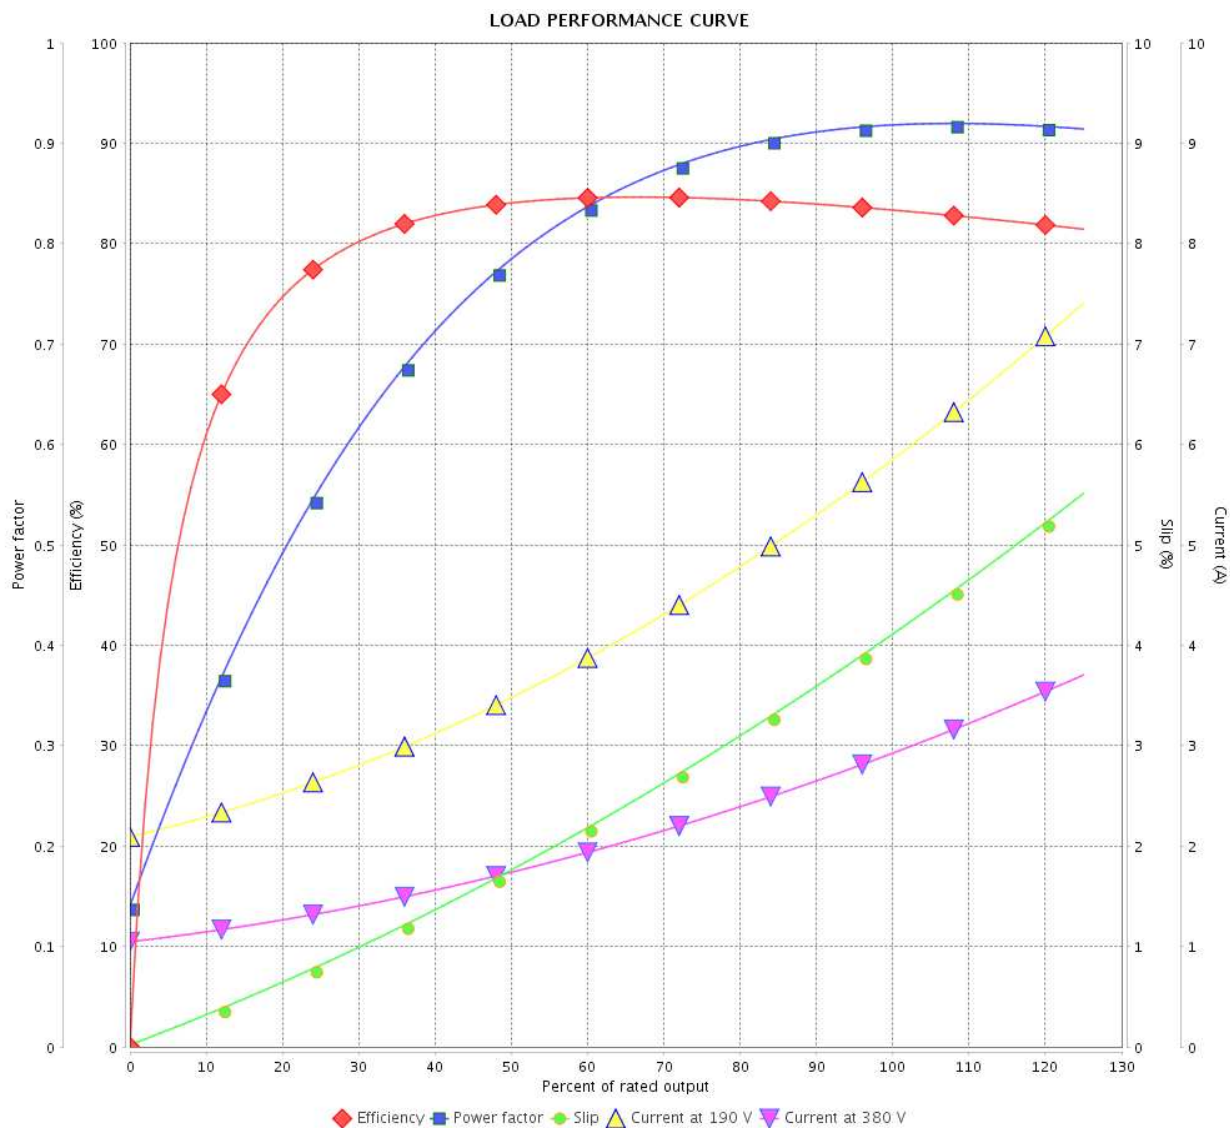

Performance : 190/380 V 50 Hz 2P

Rated current : 5.94/2.97 A
 LRC : 7.4
 Rated torque : 0.505 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 280 %
 Rated speed : 2875 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 4Revision		
Checked by				
Date	17/05/2022			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 13722360

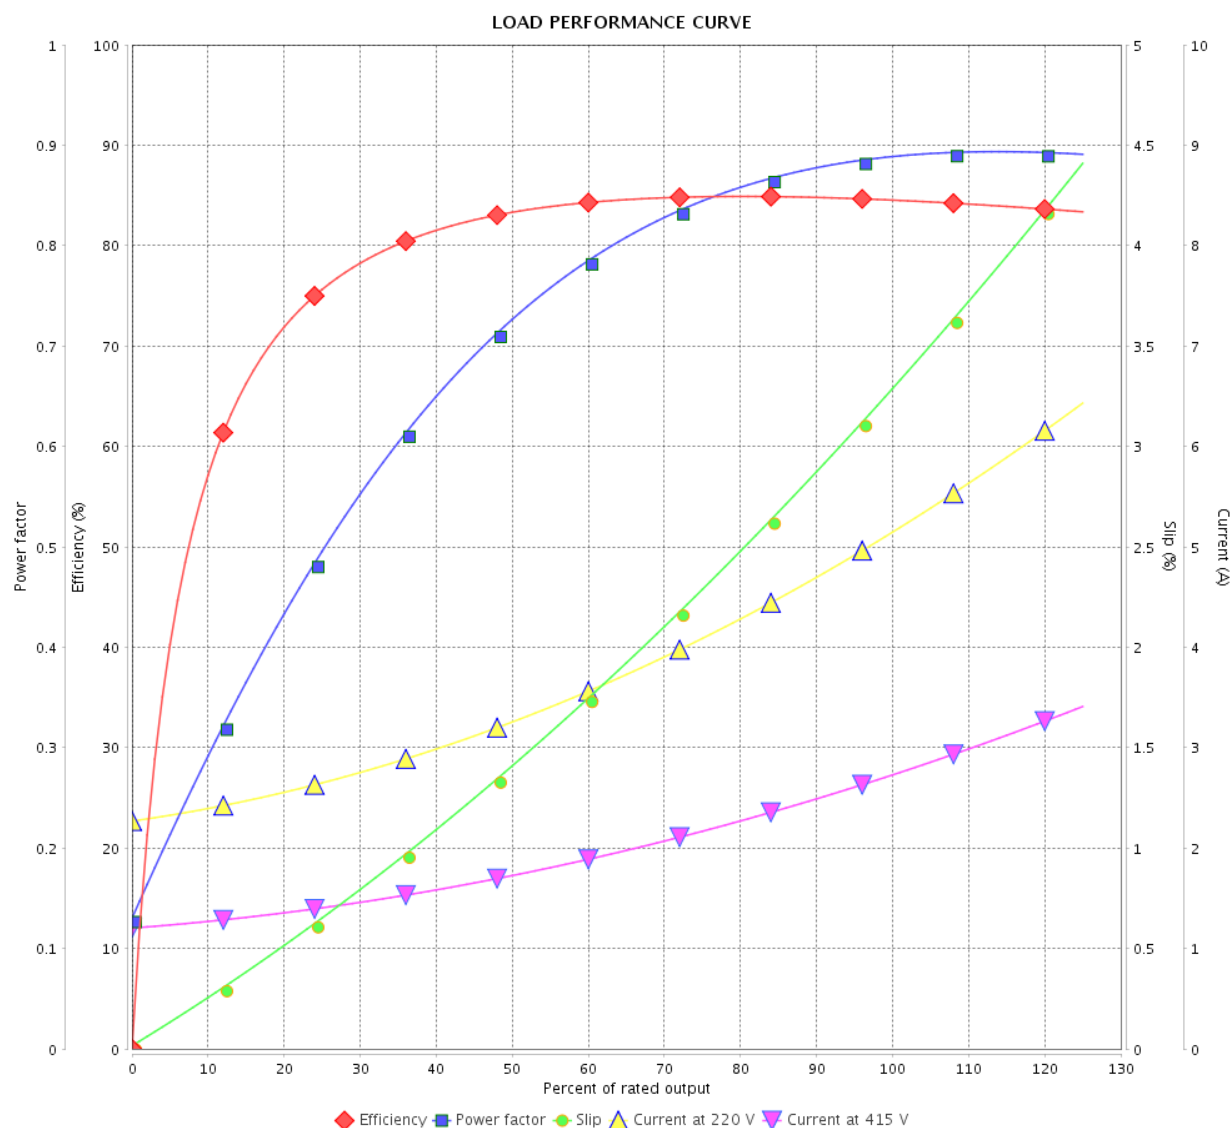


Performance : 220/415 V 50 Hz 2P

Rated current : 5.23/2.77 A
 LRC : 8.8
 Rated torque : 0.501 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 340 %
 Rated speed : 2900 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by					
Date					
	17/05/2022			4 / 4	

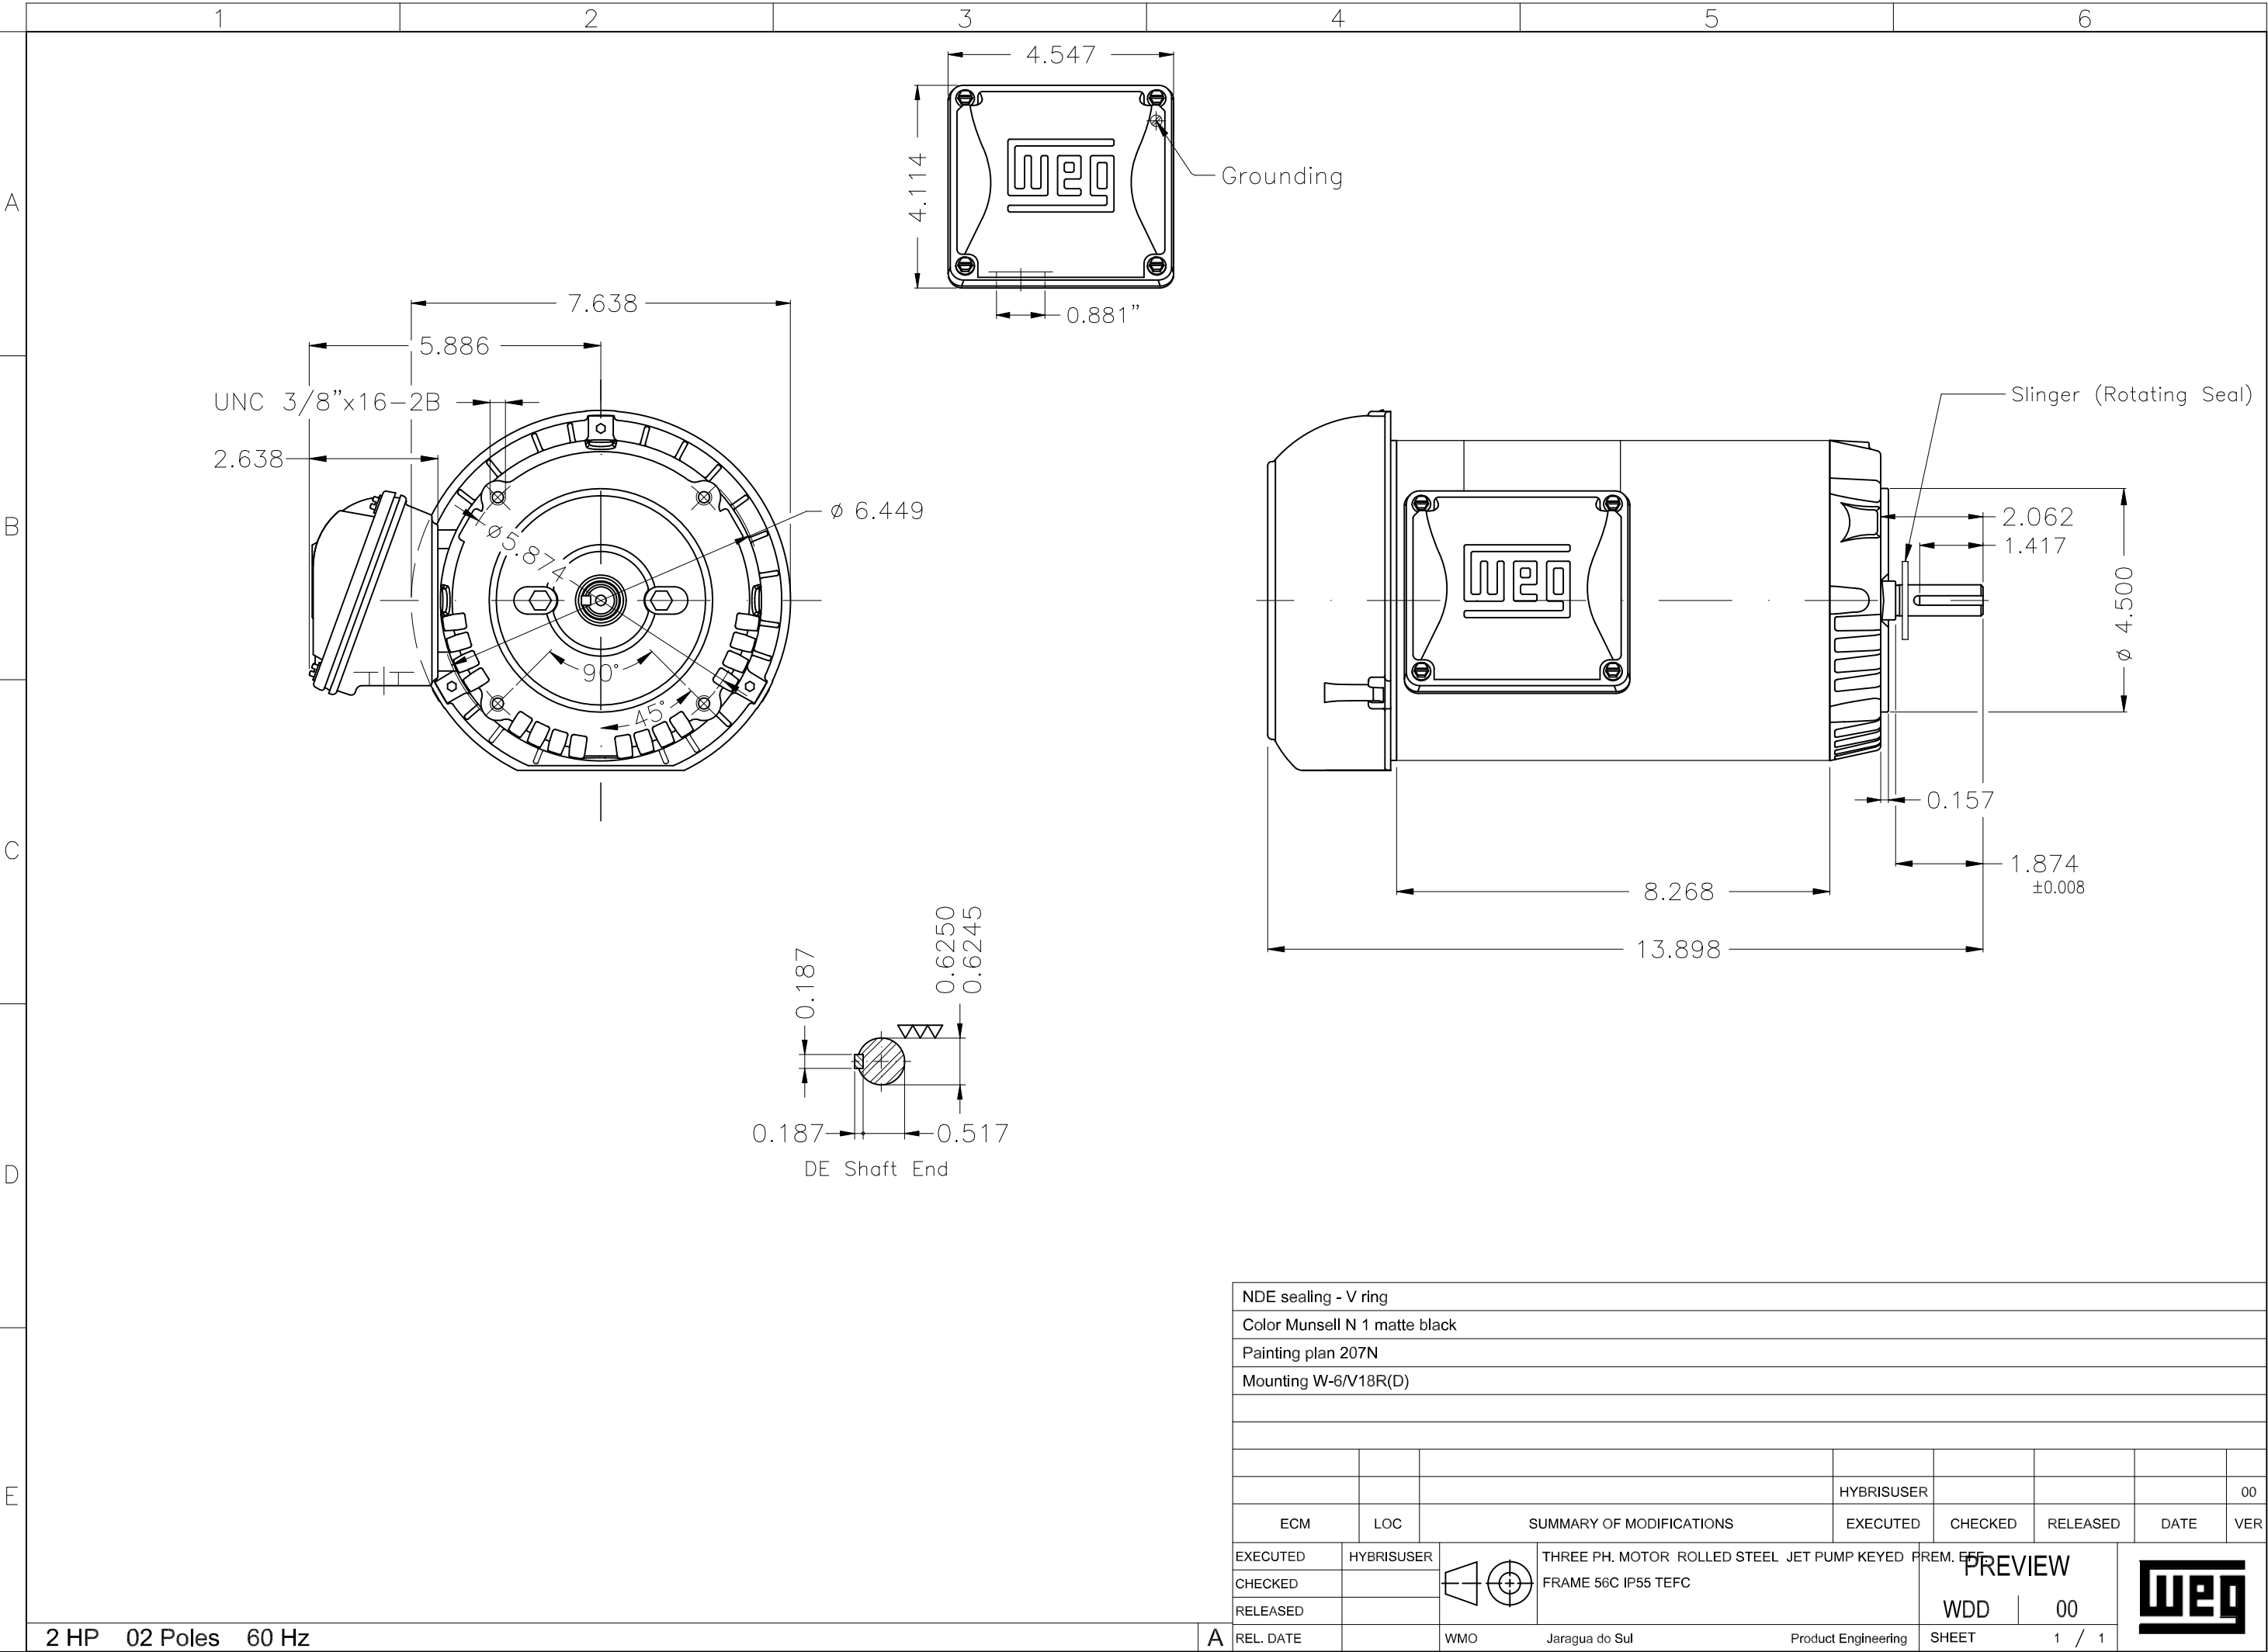

NDE sealing - V ring									
Color Munsell N 1 matte black									
Painting plan 207N									
Mounting W-6/V18R(D)									