DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Jet Pump - C type Three-Phase	Product code :	13722362

Frame	: 56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation¹	: CCW
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight³	: 21.6 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0070 kgm²
Design	: B		

Output [HP]		3
Poles		2
Frequency [Hz]		60
Rated voltage [V]		575
Rated current [A]		2.81
L. R. Amperes [A]		26.7
LRC [A]		9.5x(Code L)
No load current [A]		1.02
Rated speed [RPM]		3500
Slip [%]		2.78
Rated torque [kgfm]		0.621
Locked rotor torque [%]		300
Breakdown torque [%]		380
Service factor		1.15
Temperature rise		80 K
Locked rotor time		18s (cold) 10s (hot)
Noise level²		68.0 dB(A)
Efficiency (%)	25%	
	50%	84.0
	75%	86.5
	100%	86.5
Power Factor	25%	
	50%	0.78
	75%	0.87
	100%	0.91

		Drive end	Non drive end
Bearing type	:	6203 2RS	6202 2RS
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 65 kgf

Max. compression : 87 kgf

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Jet Pump - C type Three-Phase	Product code :	13722362

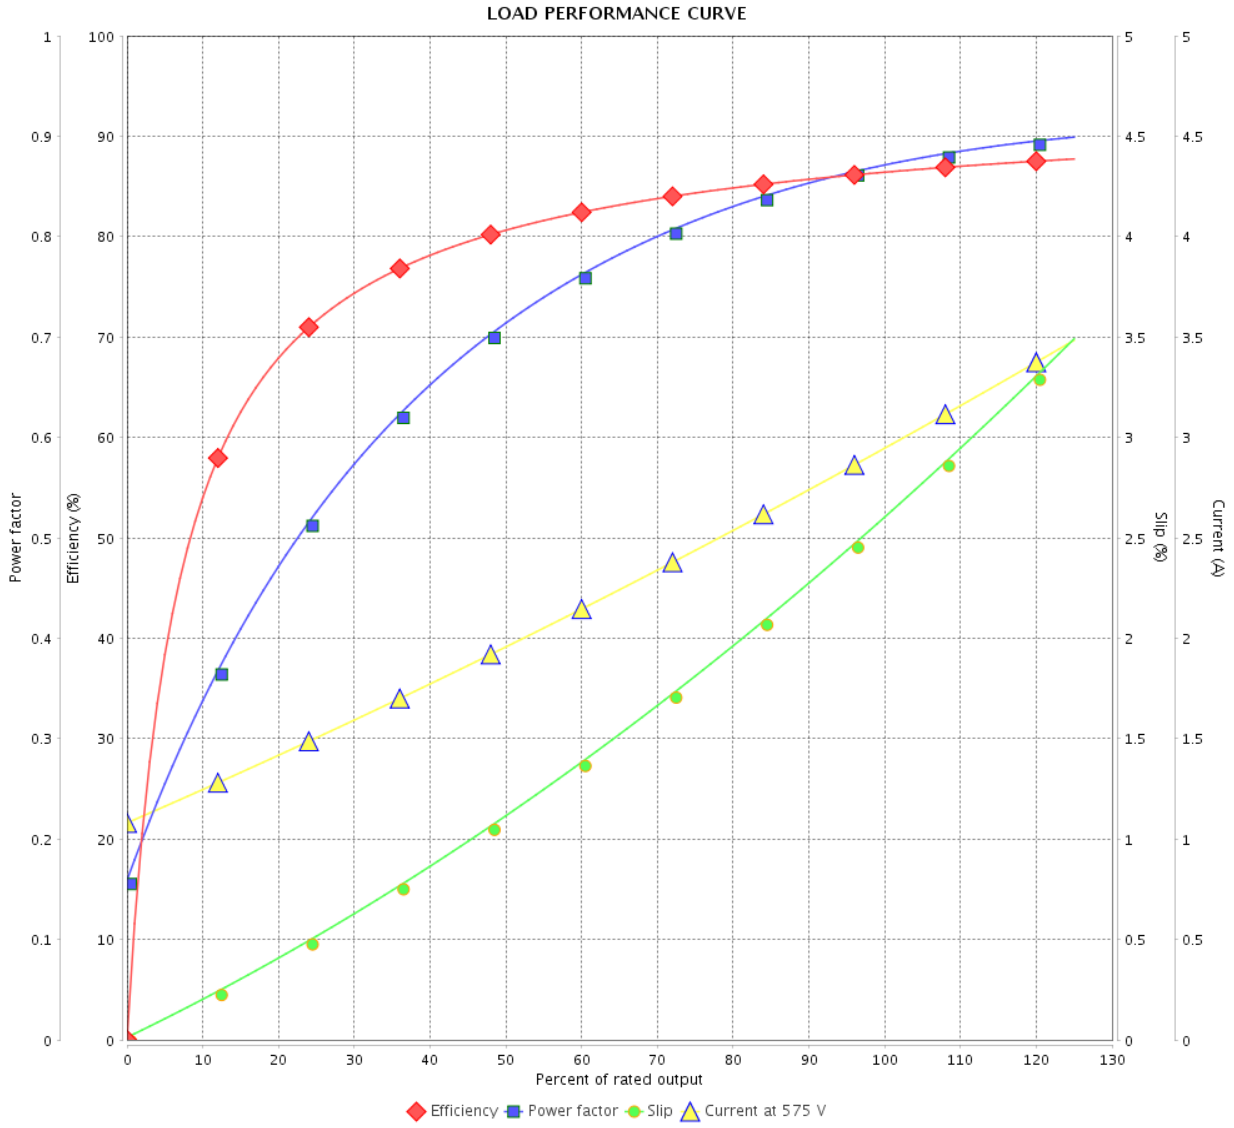



Performance	: 575 V 60 Hz 2P		
Rated current	: 2.81 A	Moment of inertia (J)	: 0.0070 kgm²
LRC	: 9.5	Duty cycle	: Cont.(S1)
Rated torque	: 0.621 kgfm	Insulation class	: F
Locked rotor torque	: 300 %	Service factor	: 1.15
Breakdown torque	: 380 %	Temperature rise	: 80 K
Rated speed	: 3500 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	17/05/2022		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

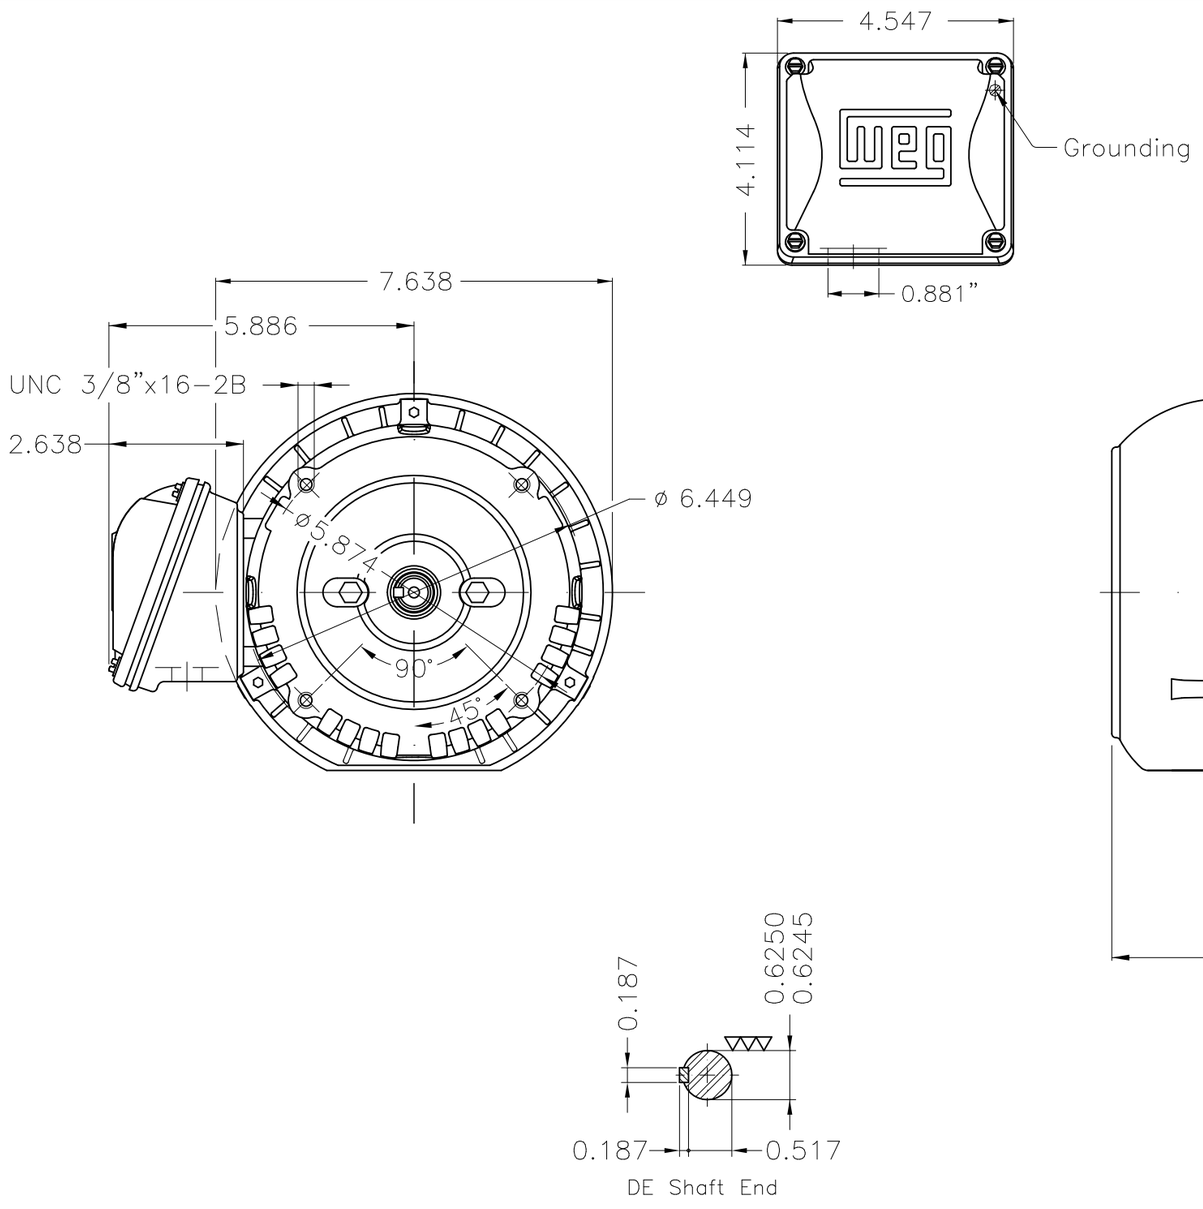

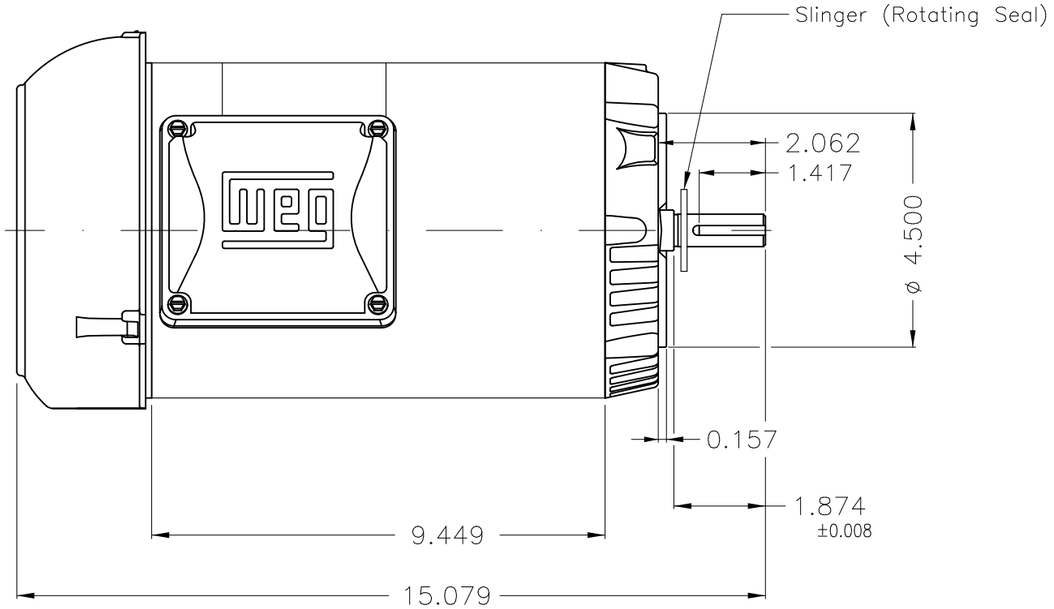

NDE sealing - V ring							
Color Munsell N 1 matte black							
Painting plan 207N							
Mounting W-6/V18R(D)							
			HYBRISUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER

EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL JET PUMP KEYED PREM.EFF	PREVIEW		
CHECKED		FRAME 56C IP55 TEFC			
RELEASED			WDD	00	
REL. DATE		WMO Jaragua do Sul Product Engineering	SHEET	1 / 1	

3 HP 02 Poles 60 Hz

A

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.