

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Standard Efficiency Three-Phase	Product code :	13377281
Frame	: 56	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 9.4 kg	
		Moment of inertia (J)	: 0.0025 kgm ²	
Output [HP]	0.75			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	1.07			
L. R. Amperes [A]	6.75			
LRC [A]	6.3x(Code K)			
No load current [A]	0.880			
Rated speed [RPM]	1755			
Slip [%]	2.50			
Rated torque [kgfm]	0.310			
Locked rotor torque [%]	229			
Breakdown torque [%]	300			
Service factor	1.25			
Temperature rise	80 K			
Locked rotor time	23s (cold) 13s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%			
	50%	66.0		
	75%	72.0		
	100%	75.5		
Power Factor	25%			
	50%	0.45		
	75%	0.58		
	100%	0.68		
Bearing type	: Drive end 6203 ZZ Non drive end 6202 ZZ	Foundation loads		
Sealing	: Without Bearing Seal Without Bearing Seal	Max. traction : 25 kgf		
		Max. compression : 34 kgf		
Lubrication interval	: -			
Lubricant amount	: -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13377281


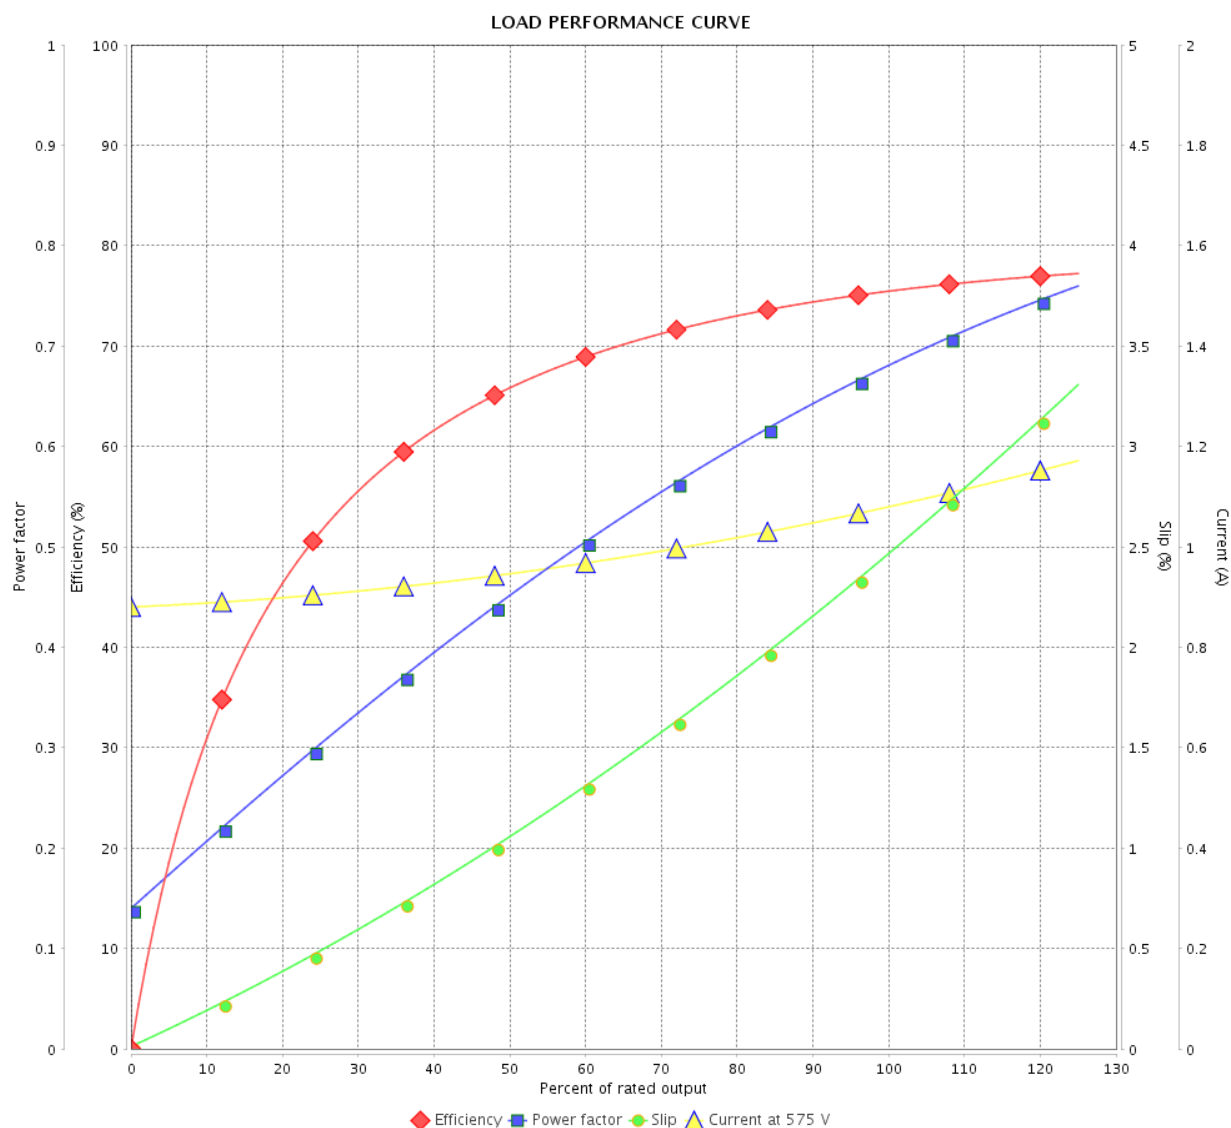


Performance : 575 V 60 Hz 4P

Rated current : 1.07 A
 LRC : 6.3
 Rated torque : 0.310 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 300 %
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 2 / 2
Checked by				
Date				
	17/05/2022			Revision

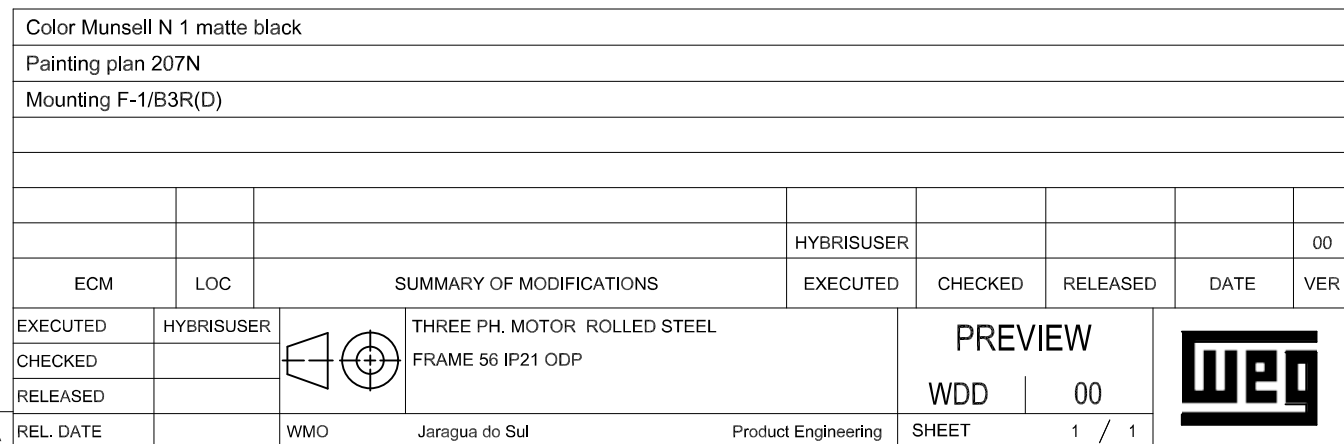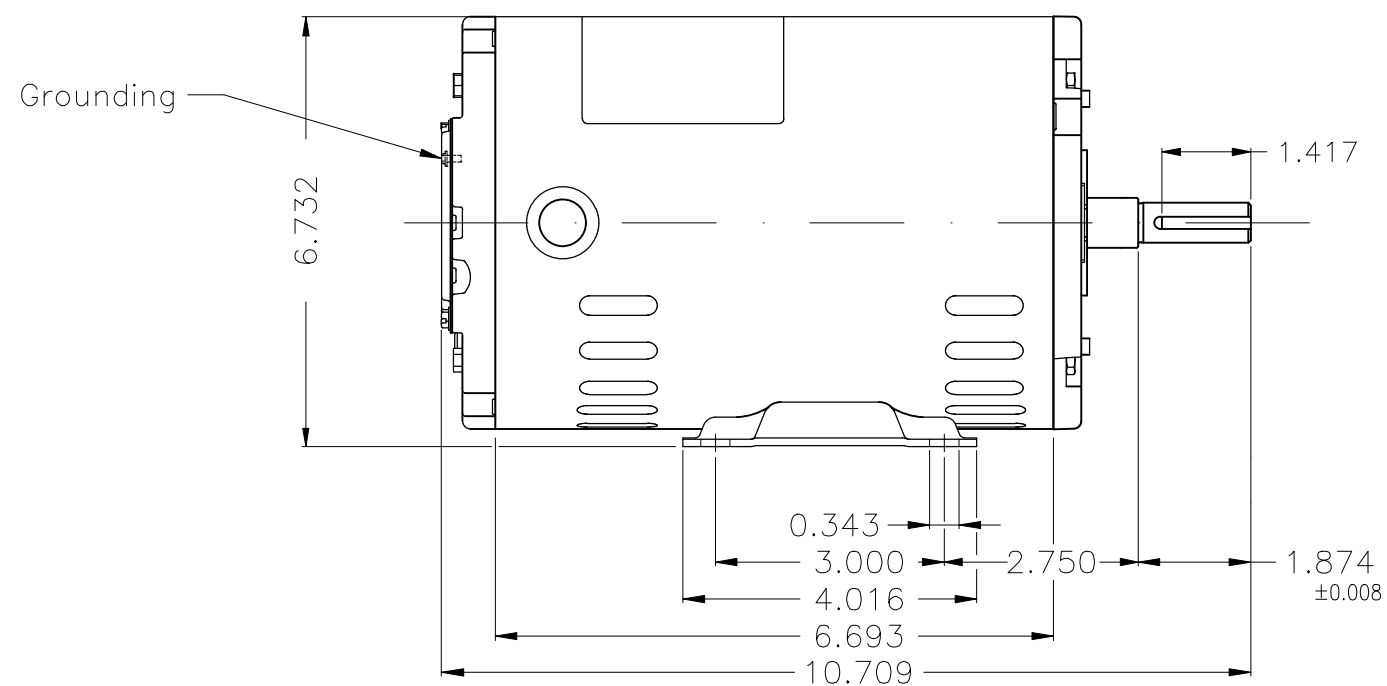

WEG's property. Forbidden reproduction without previous authorization.