

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase Product code : 13016466

Frame : 145HP	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : W-6
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 26.5 kg
Protection degree : IP55	Moment of inertia (J) : 0.0060 kgm ²
Design : B	

Output [HP]	1.5	1.5	1.5	1.5
Poles	4	4	4	4
Frequency [Hz]	60	50	50	50
Rated voltage [V]	230/460	380	400	415
Rated current [A]	4.04/2.02	2.42	2.33	2.30
L. R. Amperes [A]	33.9/17.0	15.5	16.3	17.0
LRC [A]	8.4x(Code L)	6.4x(Code J)	7.0x(Code K)	7.4x(Code K)
No load current [A]	2.20/1.10	1.10	1.20	1.30
Rated speed [RPM]	1755	1440	1445	1450
Slip [%]	2.50	4.00	3.67	3.33
Rated torque [kgfm]	0.620	0.756	0.751	0.751
Locked rotor torque [%]	290	220	250	280
Breakdown torque [%]	350	250	290	320
Service factor	1.25	1.25	1.25	1.25
Temperature rise	80 K	80 K	80 K	80 K
Locked rotor time	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)
Noise level ²	51.0 dB(A)	49.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%			
	50%	82.5	82.5	81.0
	75%	85.5	84.0	84.0
	100%	86.5	84.1	84.1
Power Factor	25%			
	50%	0.60	0.67	0.60
	75%	0.70	0.76	0.70
	100%	0.79	0.82	0.79

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	14.6	14.6	14.6	14.6
	P2 (0,5;1,0)	12.1	12.1	12.1	12.1
	P3 (0,25;1,0)	12.2	12.2	12.2	12.2
	P4 (0,9;0,5)	8.2	8.2	8.2	8.2
	P5 (0,5;0,5)	5.7	5.7	5.7	5.7
	P6 (0,5;0,25)	4.3	4.3	4.3	4.3
	P7 (0,25;0,25)	3.2	3.2	3.2	3.2

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type :	6307 ZZ	6204 ZZ	Max. traction
Sealing :	V'Ring	V'Ring	Max. compression
Lubrication interval :	-	-	
Lubricant amount :	-	-	
Lubricant type :	Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.
 (1) Looking the motor from the shaft end.
 (2) Measured at 1m and with tolerance of +3dB(A).
 (3) Approximate weight subject to changes after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	26/10/2024			

Page 1 / 6
Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Notes
USABLE @208V 4.36A SF 1.15 SFA 5.01A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 6		Revision
Checked by					
Date	26/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium
Efficiency Three-Phase

Product code : 13016466

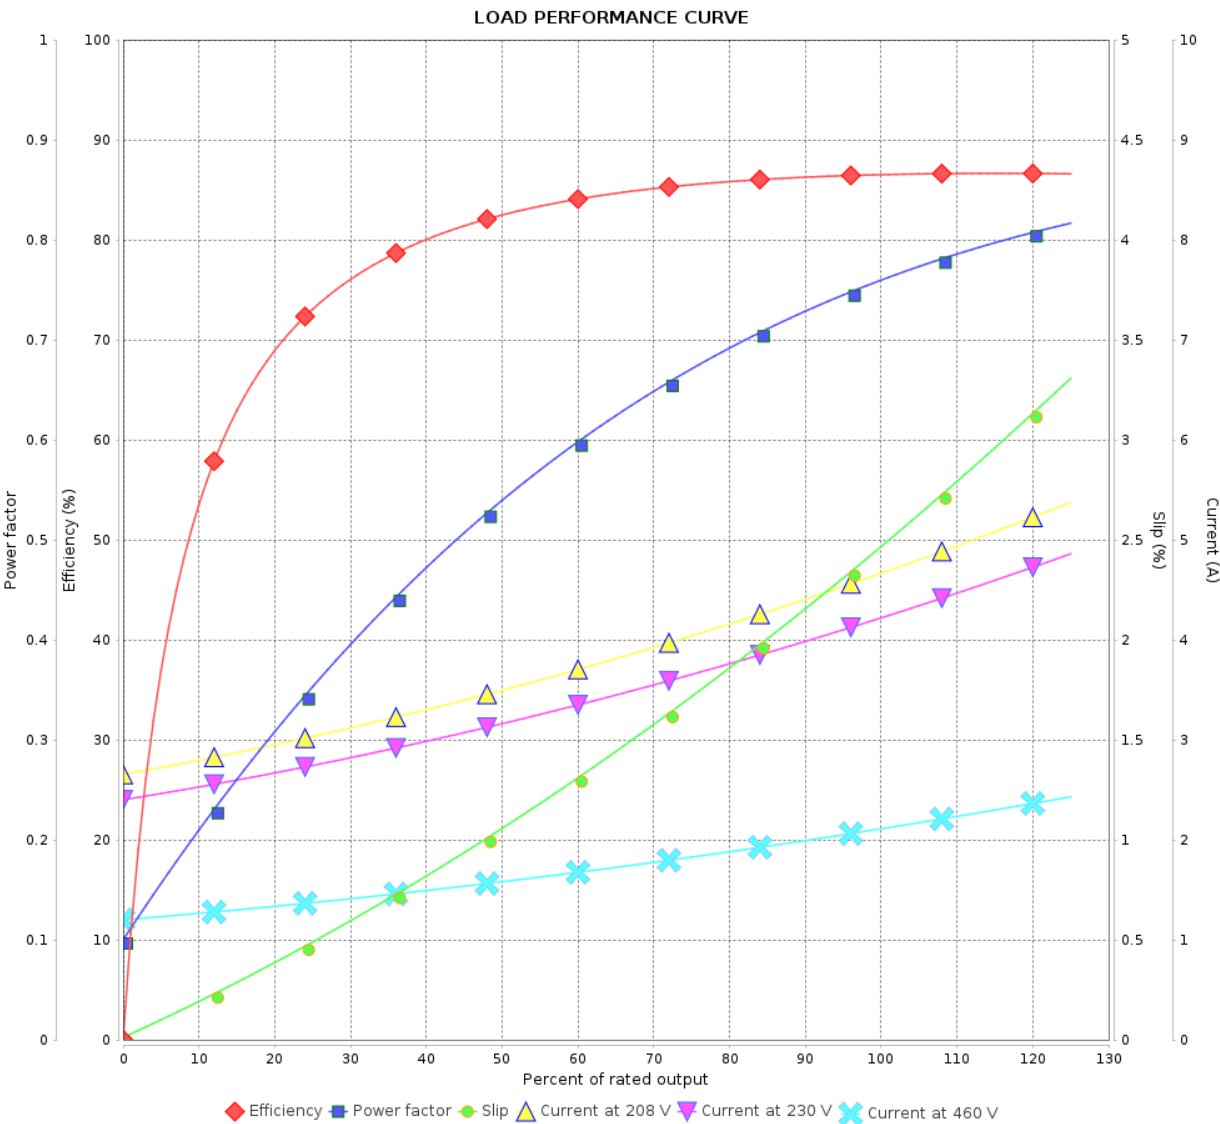

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A
LRC : 8.4
Rated torque : 0.620 kgfm
Locked rotor torque : 290 %
Breakdown torque : 350 %
Rated speed : 1755 rpm

Moment of inertia (J) : 0.0060 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 3 / 6	Revision
Checked by					
Date	26/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium
Efficiency Three-Phase

Product code : 13016466

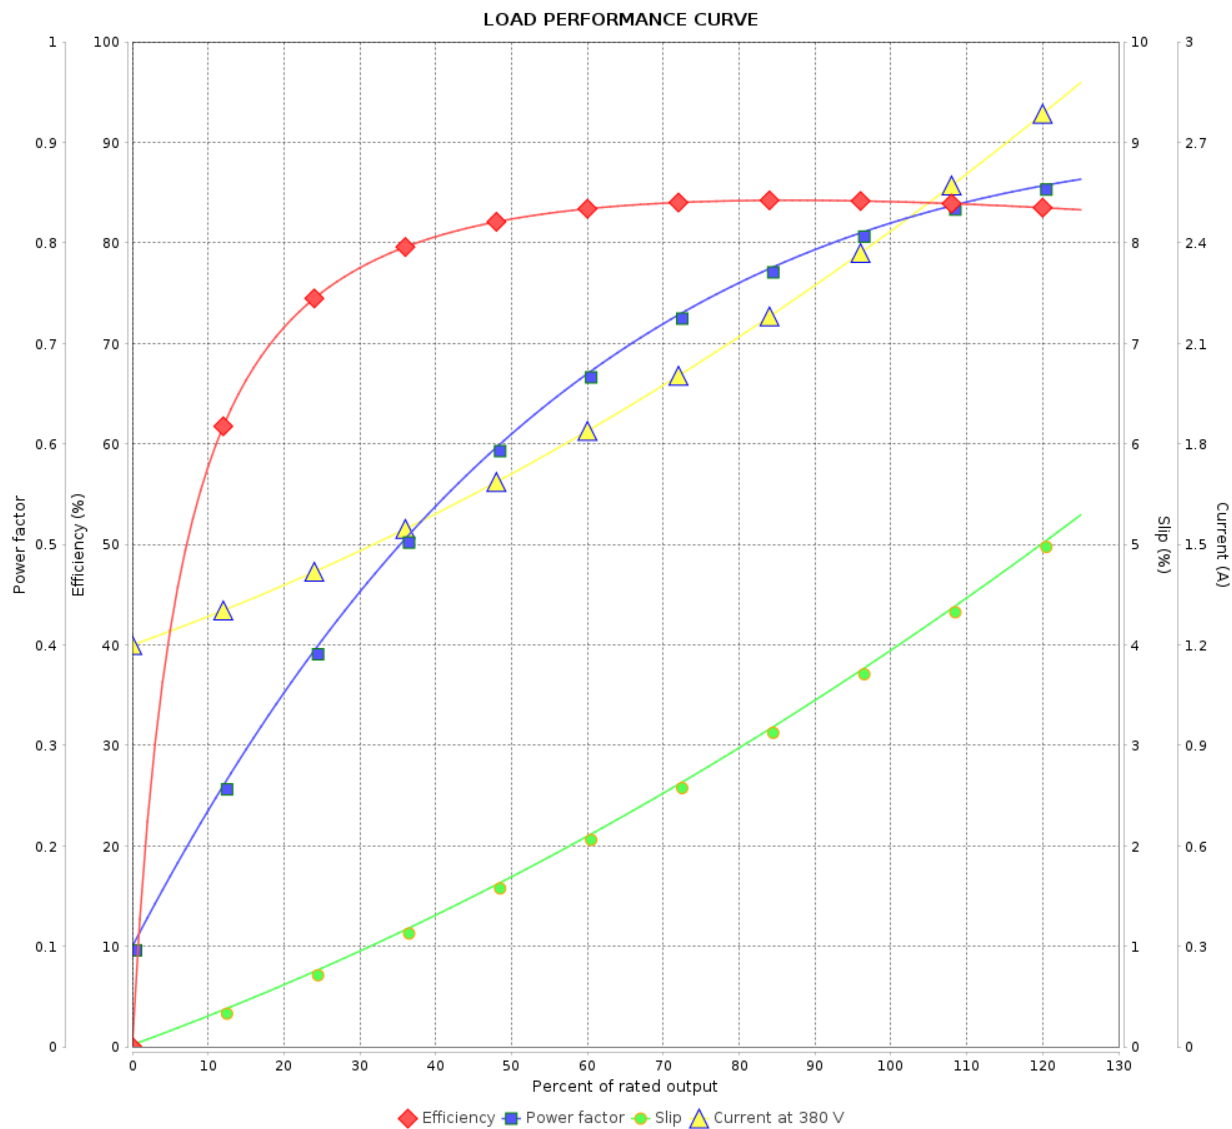

Performance : 380 V 50 Hz 4P IE3

Rated current : 2.42 A
LRC : 6.4
Rated torque : 0.756 kgfm
Locked rotor torque : 220 %
Breakdown torque : 250 %
Rated speed : 1440 rpm

Moment of inertia (J) : 0.0060 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 6	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium
Efficiency Three-Phase

Product code : 13016466

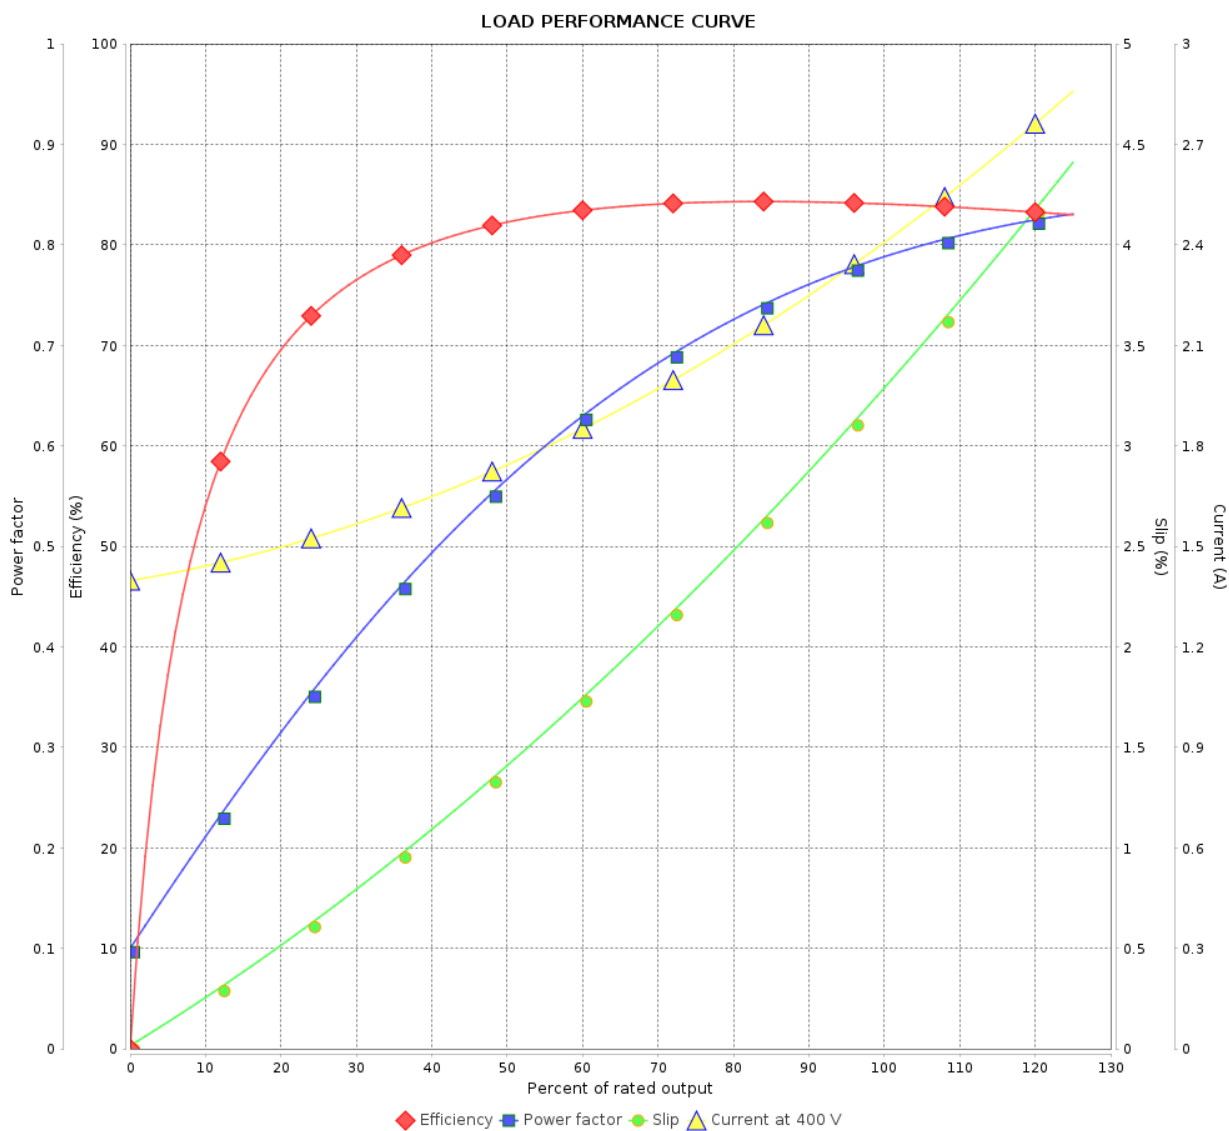

Performance : 400 V 50 Hz 4P IE3

Rated current : 2.33 A
LRC : 7.0
Rated torque : 0.751 kgfm
Locked rotor torque : 250 %
Breakdown torque : 290 %
Rated speed : 1445 rpm

Moment of inertia (J) : 0.0060 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 6 Revision		
Checked by				
Date	26/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Product code : 13016466
Efficiency Three-Phase

LOAD PERFORMANCE CURVE

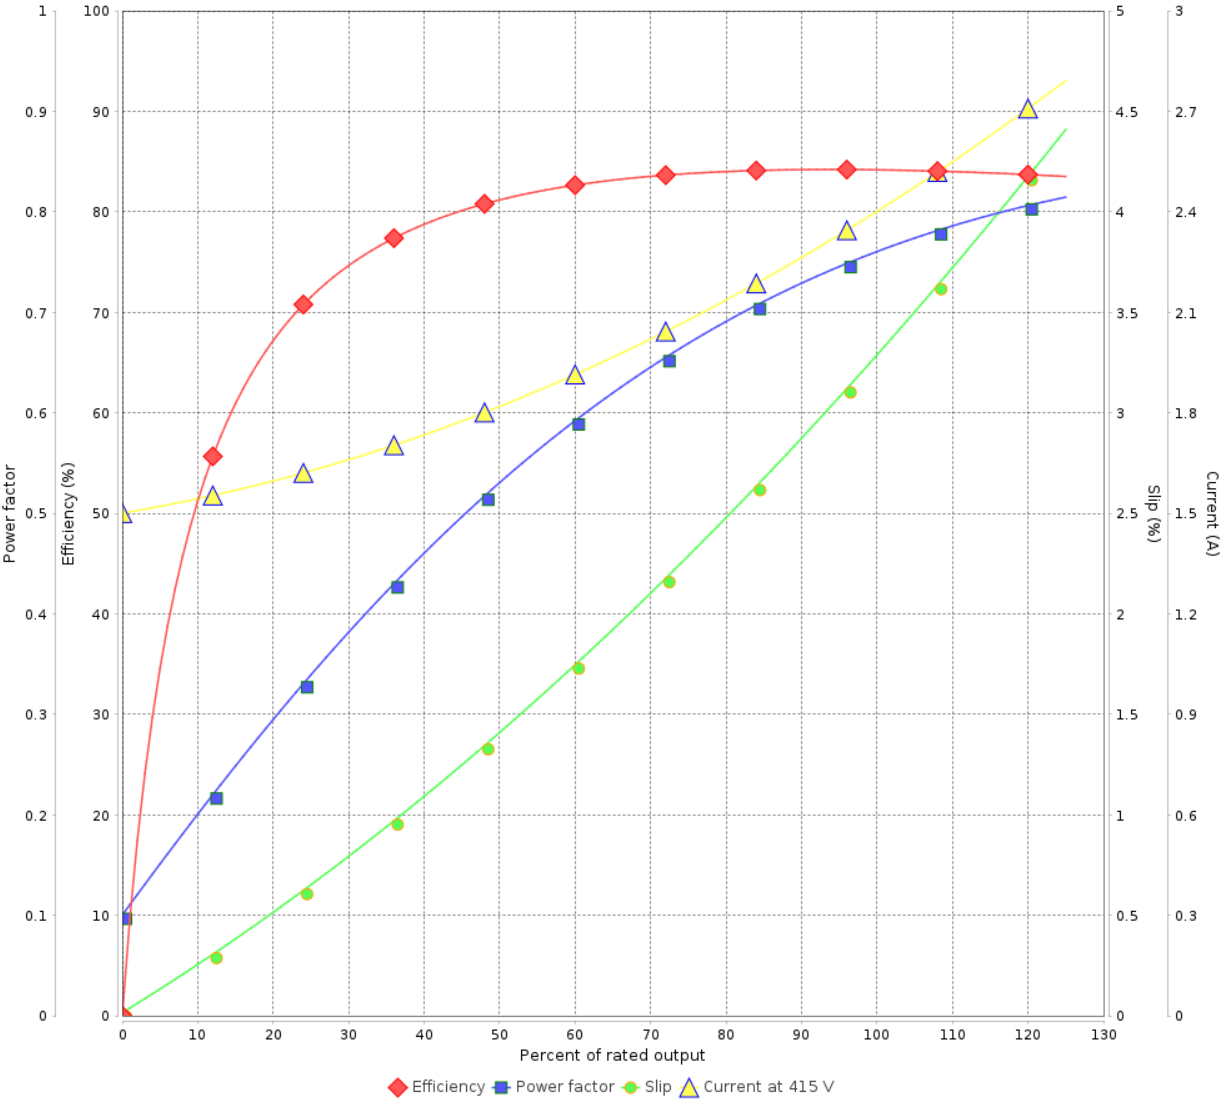

Performance : 415 V 50 Hz 4P IE3			
Rated current	: 2.30 A	Moment of inertia (J)	: 0.0060 kgm ²
LRC	: 7.4	Duty cycle	: Cont.(S1)
Rated torque	: 0.751 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.25
Breakdown torque	: 320 %	Temperature rise	: 80 K
Rated speed	: 1450 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 6 / 6	Revision
Checked by					
Date	26/10/2024				

