DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 High Efficiency Three-Phase Product code : 14282622

Frame	: 404/5TS	Locked rotor time	: 21s (cold) 12s (hot)
Output	: 125 HP	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 111 A	Protection degree	: IP23
L. R. Amperes	: 723 A	Cooling method	: IC01 - ODP
LRC	: 6.5x(Code G)	Mounting	: F-1
No load current	: 34.4 A	Rotation[1]	: Both (CW and CCW)
Rated speed	: 1775 rpm	Starting method	: Direct On Line
Slip	: 1.39 %	Approx. weight[3]	: 446 kg
Rated torque	: 51.1 kgfm		
Locked rotor torque	: 210 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.9076 kgm²		
Design	: B		

Output	25%	50%	75%	100%
Efficiency (%)	0.000	94.1	94.5	94.5
Power Factor	0.00	0.76	0.84	0.86

Foundation loads

Max. traction	: 928 kgf
Max. compression	: 1385 kgf

		Drive end	Non drive end
Bearing type	:	6314 C3	6212 Z C3
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	27 g	13 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/07/2026		1 / 2	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 High Efficiency Three-Phase Product code : 14282622

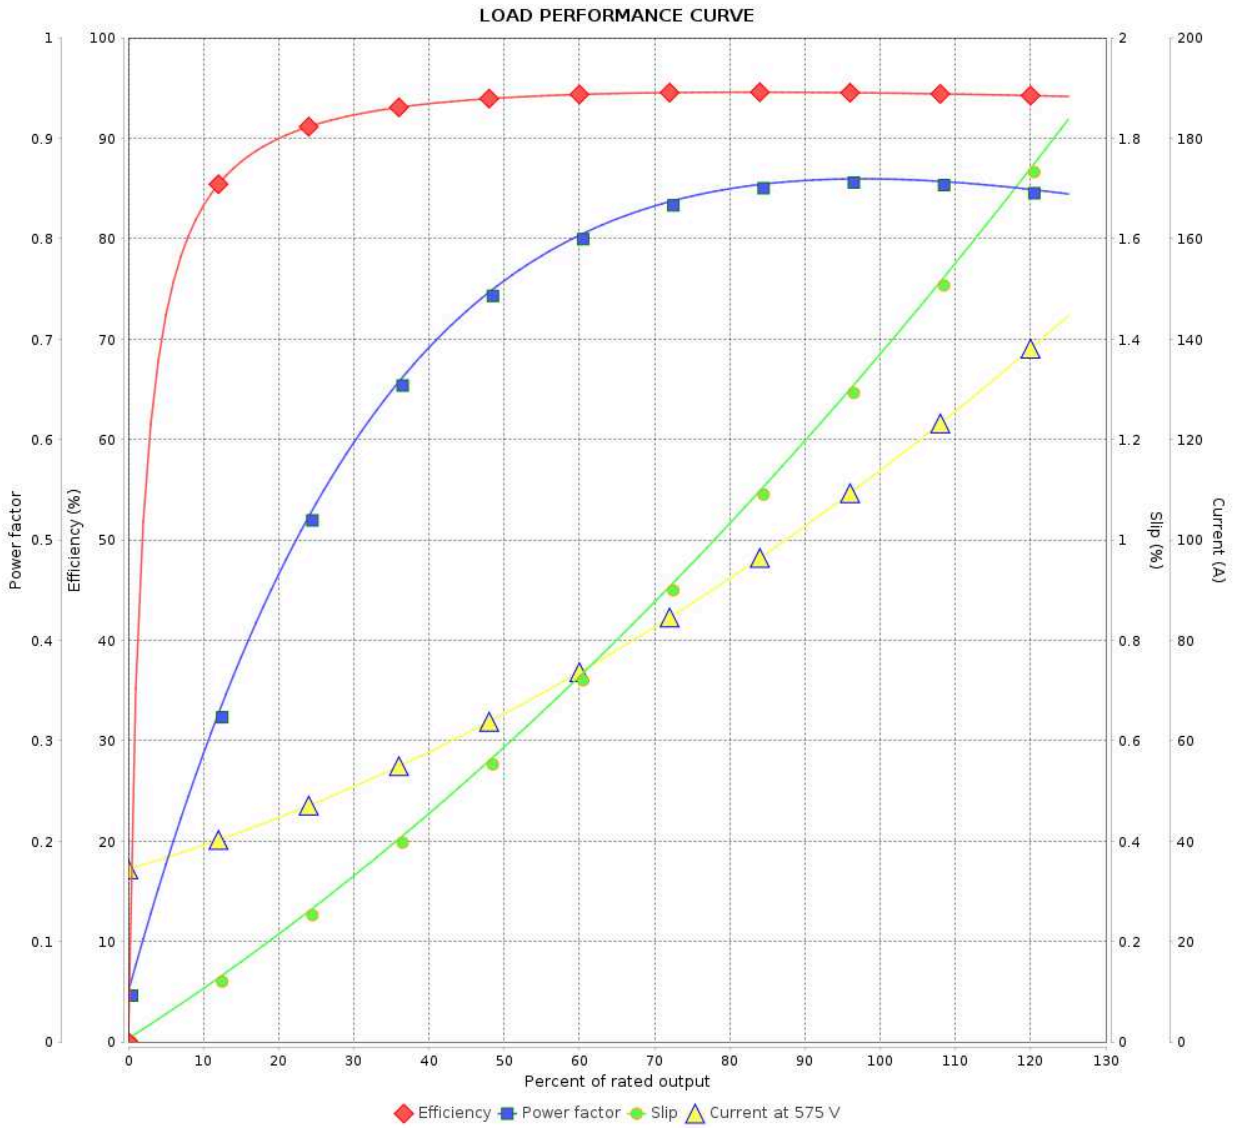



Performance	: 575 V 60 Hz 4P		
Rated current	: 111 A	Moment of inertia (J)	: 0.9076 kgm²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 51.1 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	14/07/2026		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

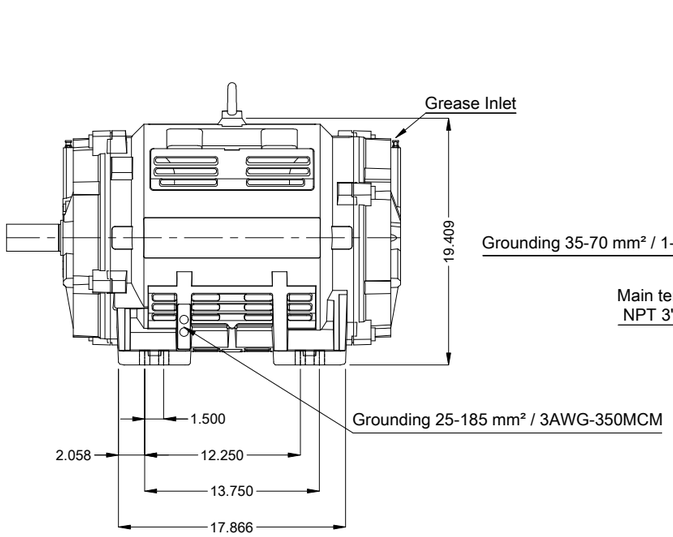


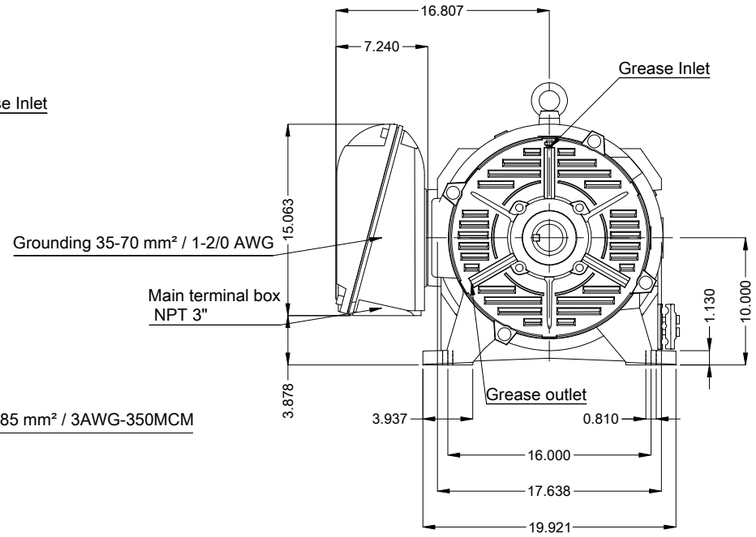

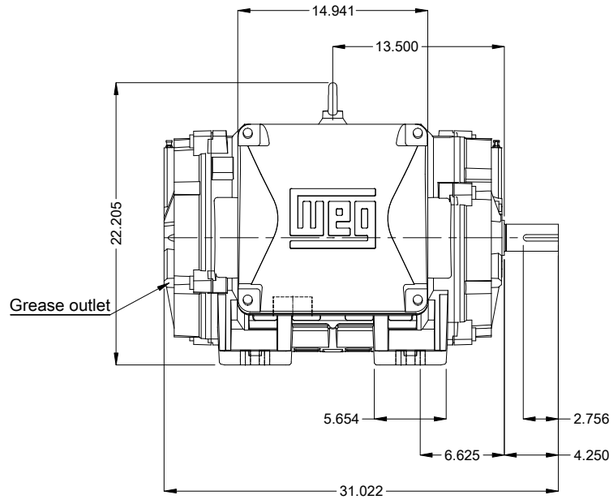

TS shaft end
Shaft material - SAE/ABNT 1040/45
Color RAL 3002
Painting plan 203A
Mounting NEMA F-1
Mounting B3R(D)

DE Shaft End



DUNC 3/4"-10 WEG WPR-7339

125 HP 04 Poles 60 Hz | A

Scale 1 : 12

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W40 HIGH EFF.
FRAME 404/5TS IP23 ODP

PREVIEW
WDD 00
SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.