DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line	: Saw Arbor Motor Standard Efficiency Three-Phase	Product code :	10793851

Frame	: 90L/MS	Locked rotor time	: 12s (cold) 7s (hot)
Output	: 10 HP (7.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 9.83 A	Protection degree	: IP54
L. R. Amperes	: 85.5 A	Cooling method	: IC411 - TEFC
LRC	: 8.7	Mounting	: B3R(D)
No load current	: 3.60 A	Rotation[1]	: CW
Rated speed	: 3480 rpm	Noise level[2]	: 68.0 dB(A)
Slip	: 3.33 %	Starting method	: Direct On Line
Rated torque	: 2.09 kgfm	Approx. weight[3]	: 75.9 kg
Locked rotor torque	: 400 %		
Breakdown torque	: 420 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0140 kgm²		
Design	: N		

Output	50%	75%	100%
Efficiency (%)	82.0	84.5	85.0
Power Factor	0.77	0.86	0.90

Foundation loads

Max. traction	: 180 kgf
Max. compression	: 256 kgf

		Drive end	Non drive end
Bearing type	:	6308 ZZ	6208 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	26/10/2024		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Saw Arbor Motor Standard Efficiency Three-Phase

Product code : 10793851

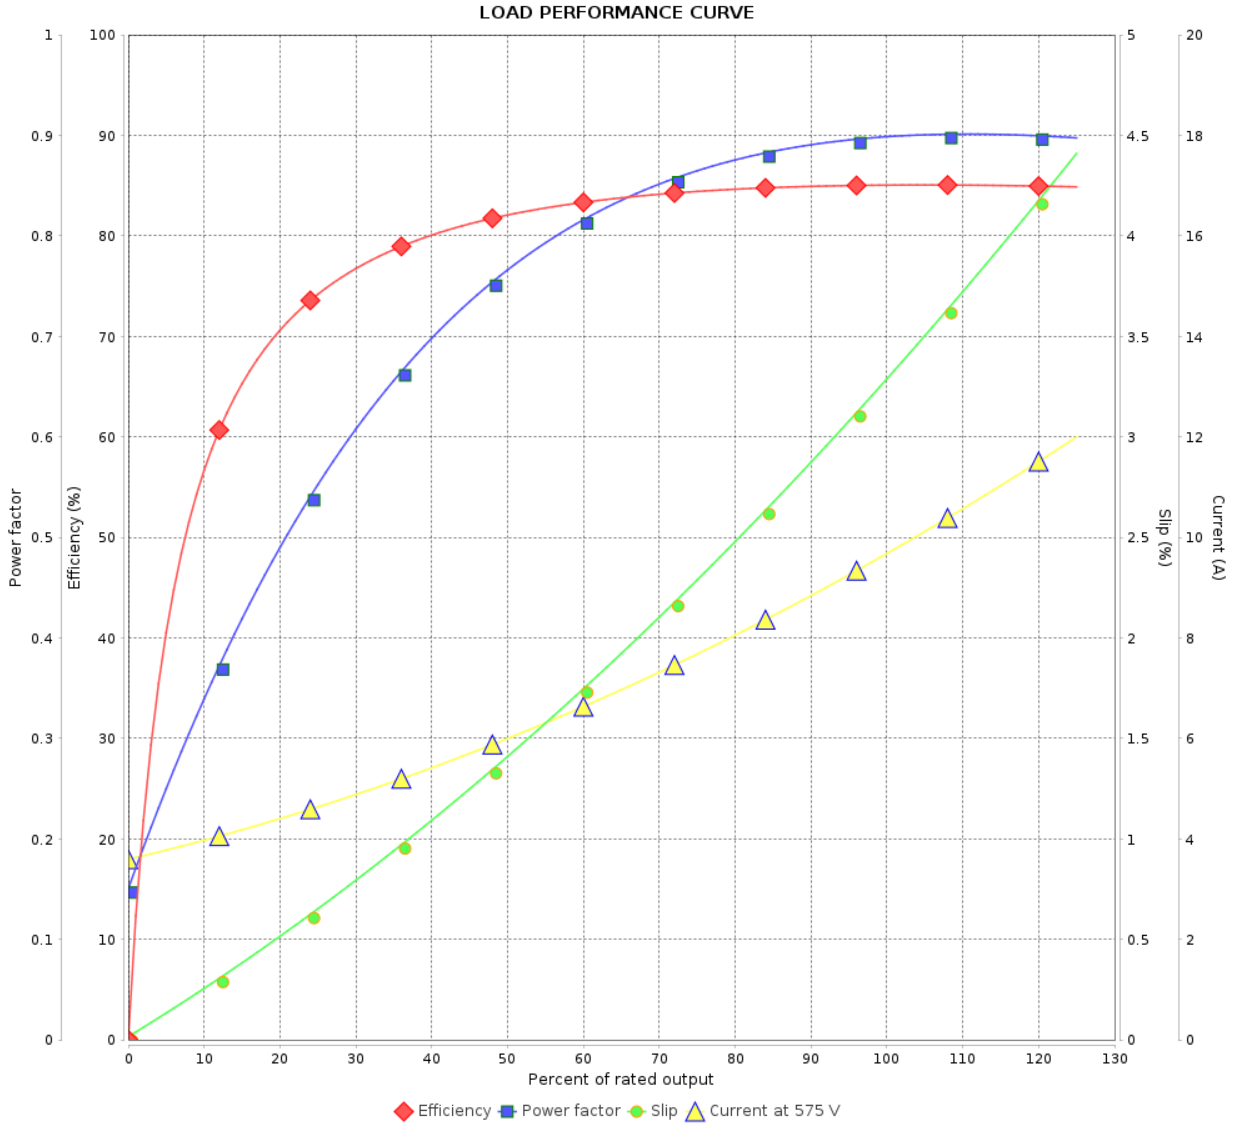

Performance	: 575 V 60 Hz 2P

Rated current	: 9.83 A	Moment of inertia (J)	: 0.0140 kgm²
LRC	: 8.7	Duty cycle	: S1
Rated torque	: 2.09 kgfm	Insulation class	: F
Locked rotor torque	: 400 %	Service factor	: 1.15
Breakdown torque	: 420 %	Temperature rise	: 80 K
Rated speed	: 3480 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	26/10/2024		2 / 2	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

EIXO/SHAFT	
PADRÃO/STANDARD	X
OPCIONAL/OPTIONAL	
ESPECIAL/SPECIAL	

Dimensões em mm
Dimensions in mm


THIS IS AN UPDATED REVISION, THE PREVIOUS ONE MUST BE DISREGARDED.

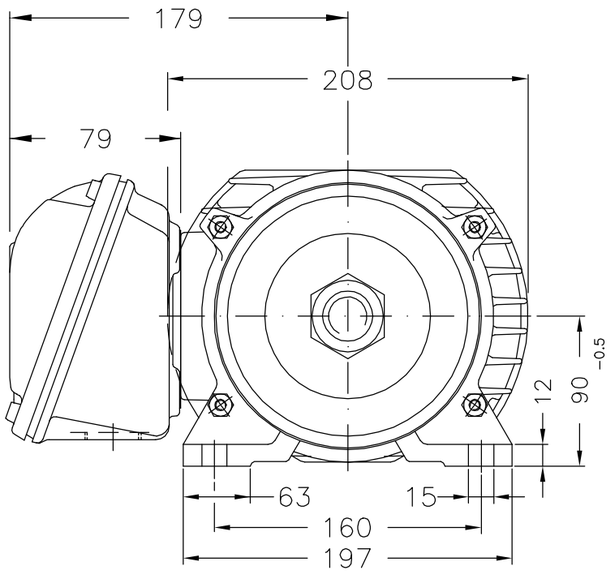

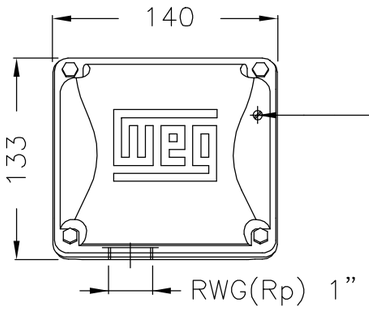

Main terminal box

Grounding for leads 2–10 mm² / 14–7 AWG

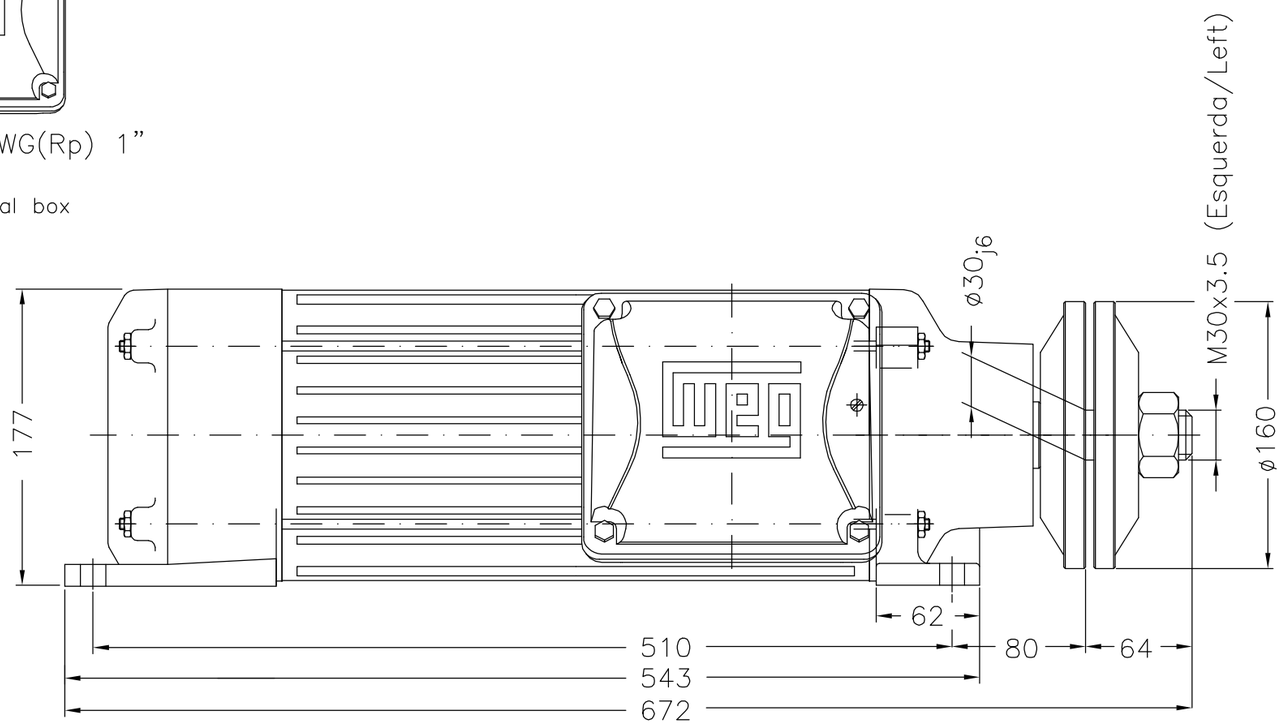

Fornecido com 2 arruelas onduladas com mancal traseiro para eliminal a folga axial
Supplied with 2 washer on ODE bearing to eliminate the axial clearance

Isolamento classe F (Dt=80K) / Class F insulation – 80K temperature rise

Sentido de Rotação Horário / Clockwise

Fator de Serviço 1.0 / Service factor 1.0

Forma Construtiva B3D / Mounting – B3R(D)

500001273522		ALT. CONFORME CLAIM 414559355	FRANCINES		CASSIO	23.02.2017	01
500000002434			ADRIANAP		ADRIANAP	22.08.2008	00
ECM *ECM*	LOC *LOC*	RESUMO MODIFICAÇÃO *SUMMARY OF MODIFICATIONS*	EXECUTADO *EXECUTED*	VERIFICADO *CHECKED*	LIBERADO *RELEASED*	DATA *DATE*	VER *VER*

EXEC. / *EXECUTED*	ADRIANAP	V.J.PAMENSKY CA (ME 90L-MS)	E1003182	
VERIF. / *CHECKED*			000 | 01	
LIBER. / *RELEASED*	ADRIANAP			
DATA LB / *REL DT*	22.08.2008	JARAGUÁ DO SUL ENG. DE PRODUTO	FOLHA / *SHEET* 01 / 01	

CÓPIA SEM CONTROLE
LIBERADO
ZME A3

Propriedade da WEG. Proibida reprodução sem autorização prévia. / *WEG's property. Forbidden reproduction without previous authorization.*