

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Single-Phase Product code : 11260295

Frame	: B56CEX	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.40/3.60-3.70 A	Protection degree	: IP44
L. R. Amperes	: 44.4/21.6-22.2 A	Cooling method	: IC411 - TEFC
LRC	: 6.0x(Code M)	Mounting	: F-1
No load current	: 6.00/2.59-3.00 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1750 rpm	Starting method	: Direct On Line
Slip	: 2.78 %	Approx. weight ³	: 17.1 kg
Rated torque	: 0.207 kgfm		
Locked rotor torque	: 280 %		
Breakdown torque	: 220 %		
Insulation class	: B		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0041 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	57.0	64.0	68.6	Max. traction	: 6 kgf
Power Factor	0.44	0.55	0.63	Max. compression	: 23 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 ZZ	6203 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	26/10/2024				
		Page		Revision	
		1 / 2			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Single-Phase Product code : 11260295

LOAD PERFORMANCE CURVE

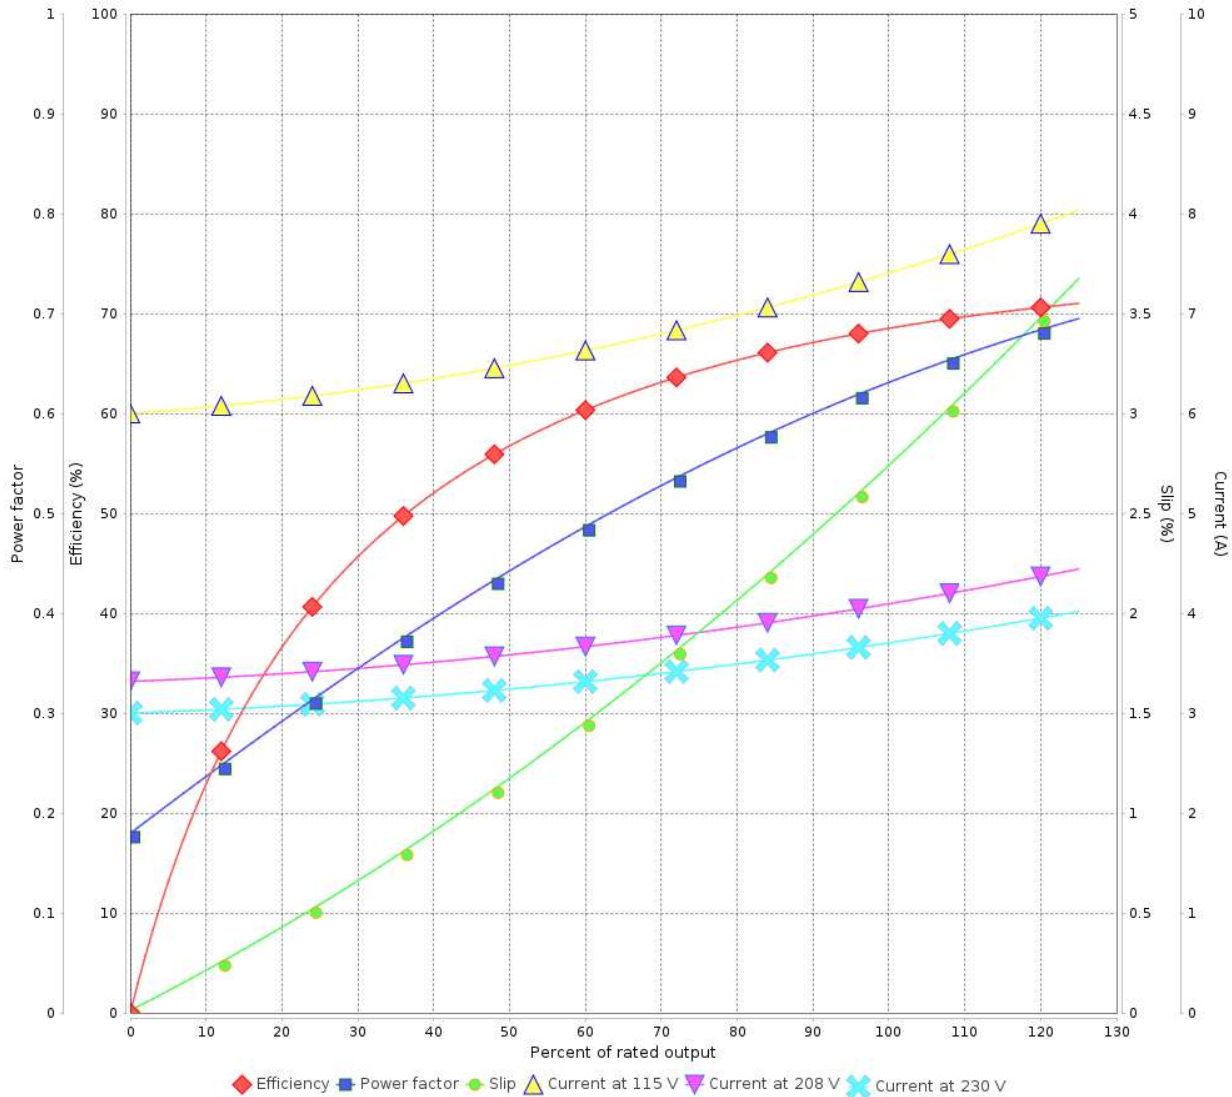



Performance : 115/208-230 V 60 Hz 4P

Rated current : 7.40/3.60-3.70 A
LRC : 6.0
Rated torque : 0.207 kgfm
Locked rotor torque : 280 %
Breakdown torque : 220 %
Rated speed : 1750 rpm

Moment of inertia (J) : 0.0041 kgm²
Duty cycle : Cont.(S1)
Insulation class : B
Service factor :
Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

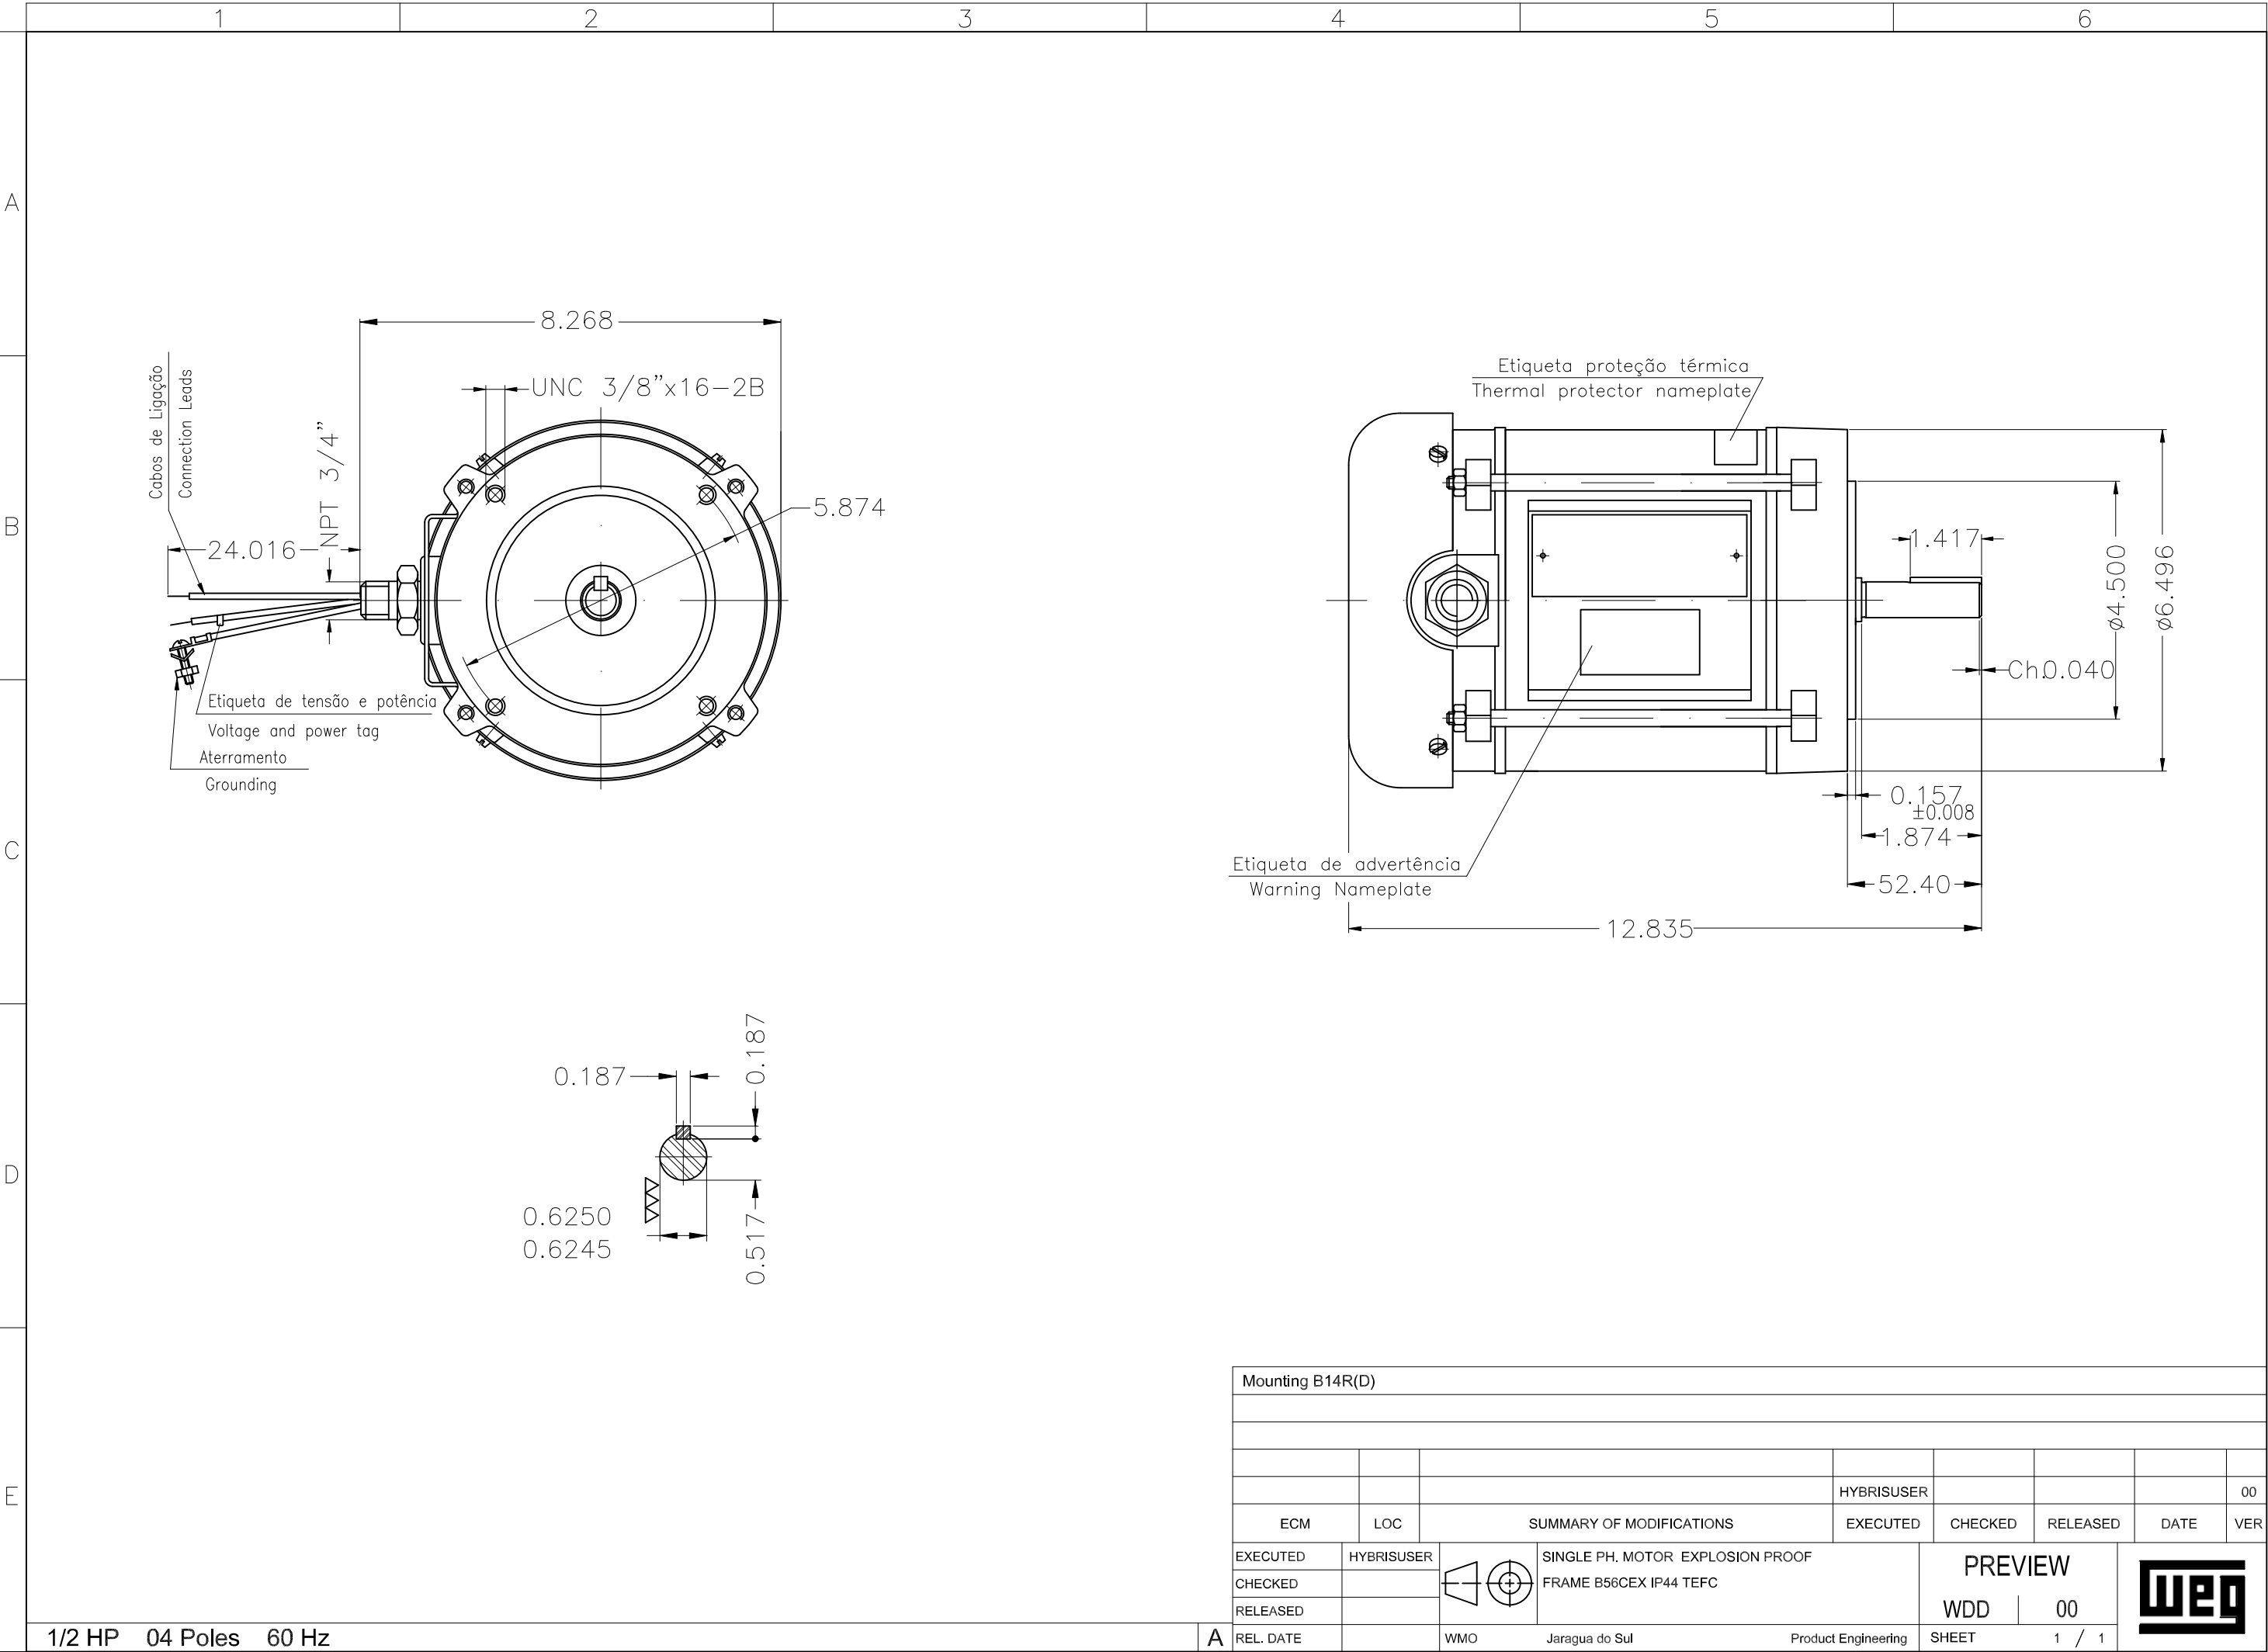

Mounting B14R(D)									
				HYBRISUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	 SINGLE PH. MOTOR EXPLOSION PROOF FRAME B56CEX IP44 TEFC			PREVIEW				
CHECKED					WDD	00			
RELEASED									
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			

1/2 HP 04 Poles 60 Hz

A