

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Single-Phase Product code : 15861200

Frame	: B56EX	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.40/3.60-3.70 A	Protection degree	: IP44
L. R. Amperes	: 44.4/21.6-22.2 A	Cooling method	: IC411 - TEFC
LRC	: 6.0x(Code M)	Mounting	: F-1
No load current	: 6.00/2.59-3.00 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1750 rpm	Starting method	: Direct On Line
Slip	: 2.78 %	Approx. weight ³	: 16.6 kg
Rated torque	: 0.207 kgfm		
Locked rotor torque	: 280 %		
Breakdown torque	: 220 %		
Insulation class	: B		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0041 kgm ²		

Output	50%	75%	100%	Foundation loads
Efficiency (%)	57.0	64.0	68.6	Max. traction : 6 kgf
Power Factor	0.44	0.55	0.63	Max. compression : 23 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 ZZ	6203 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	26/10/2024			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Single-Phase Product code : 15861200

LOAD PERFORMANCE CURVE

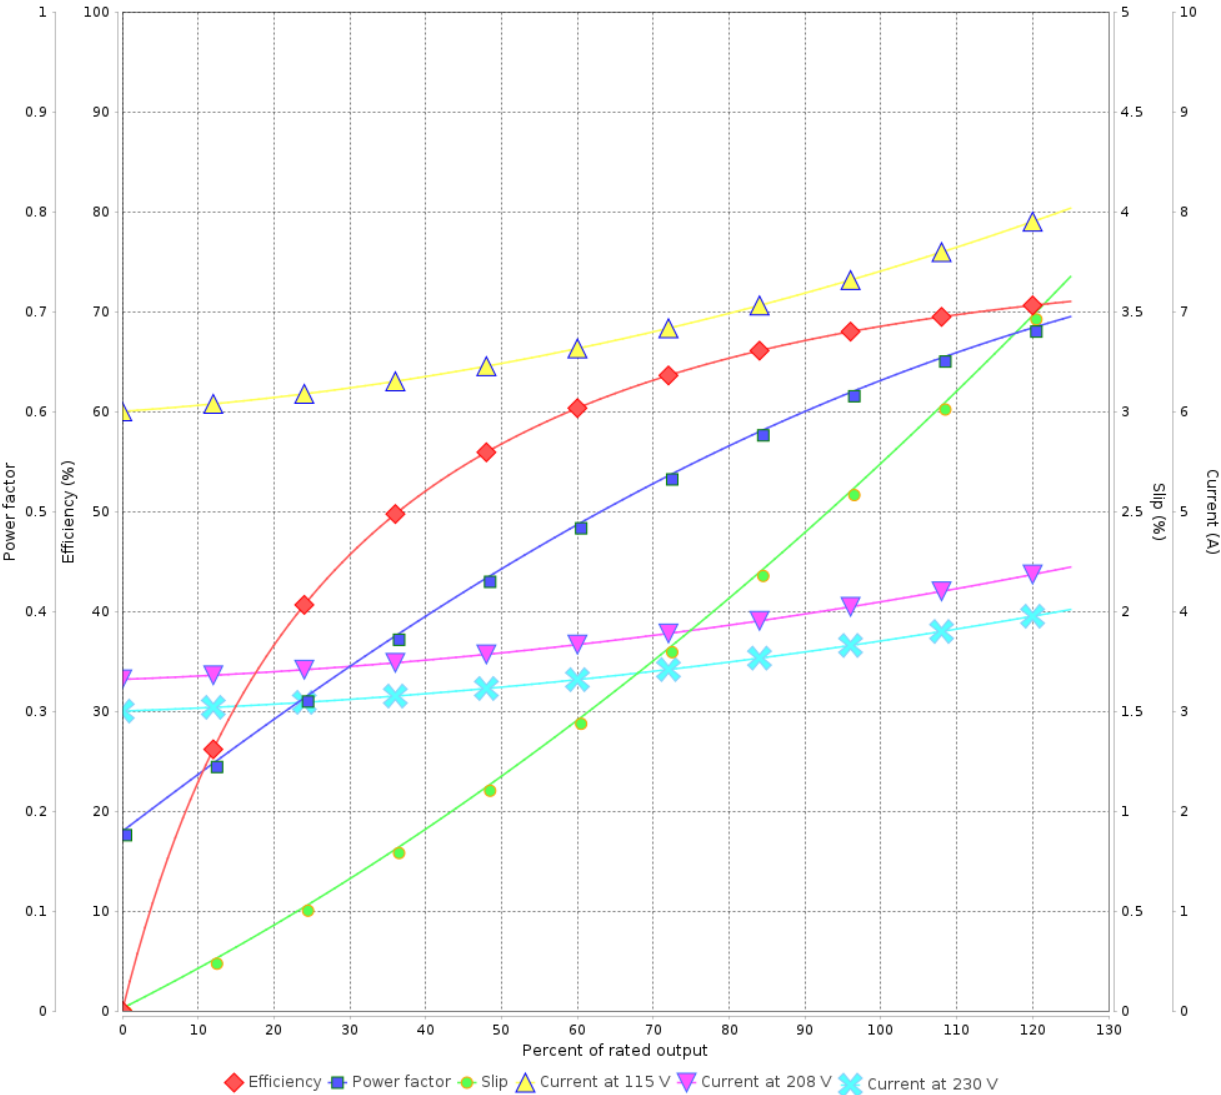


Performance : 115/208-230 V 60 Hz 4P

Rated current : 7.40/3.60-3.70 A
LRC : 6.0
Rated torque : 0.207 kgfm
Locked rotor torque : 280 %
Breakdown torque : 220 %
Rated speed : 1750 rpm

Moment of inertia (J) : 0.0041 kgm²
Duty cycle : Cont.(S1)
Insulation class : B
Service factor :
Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

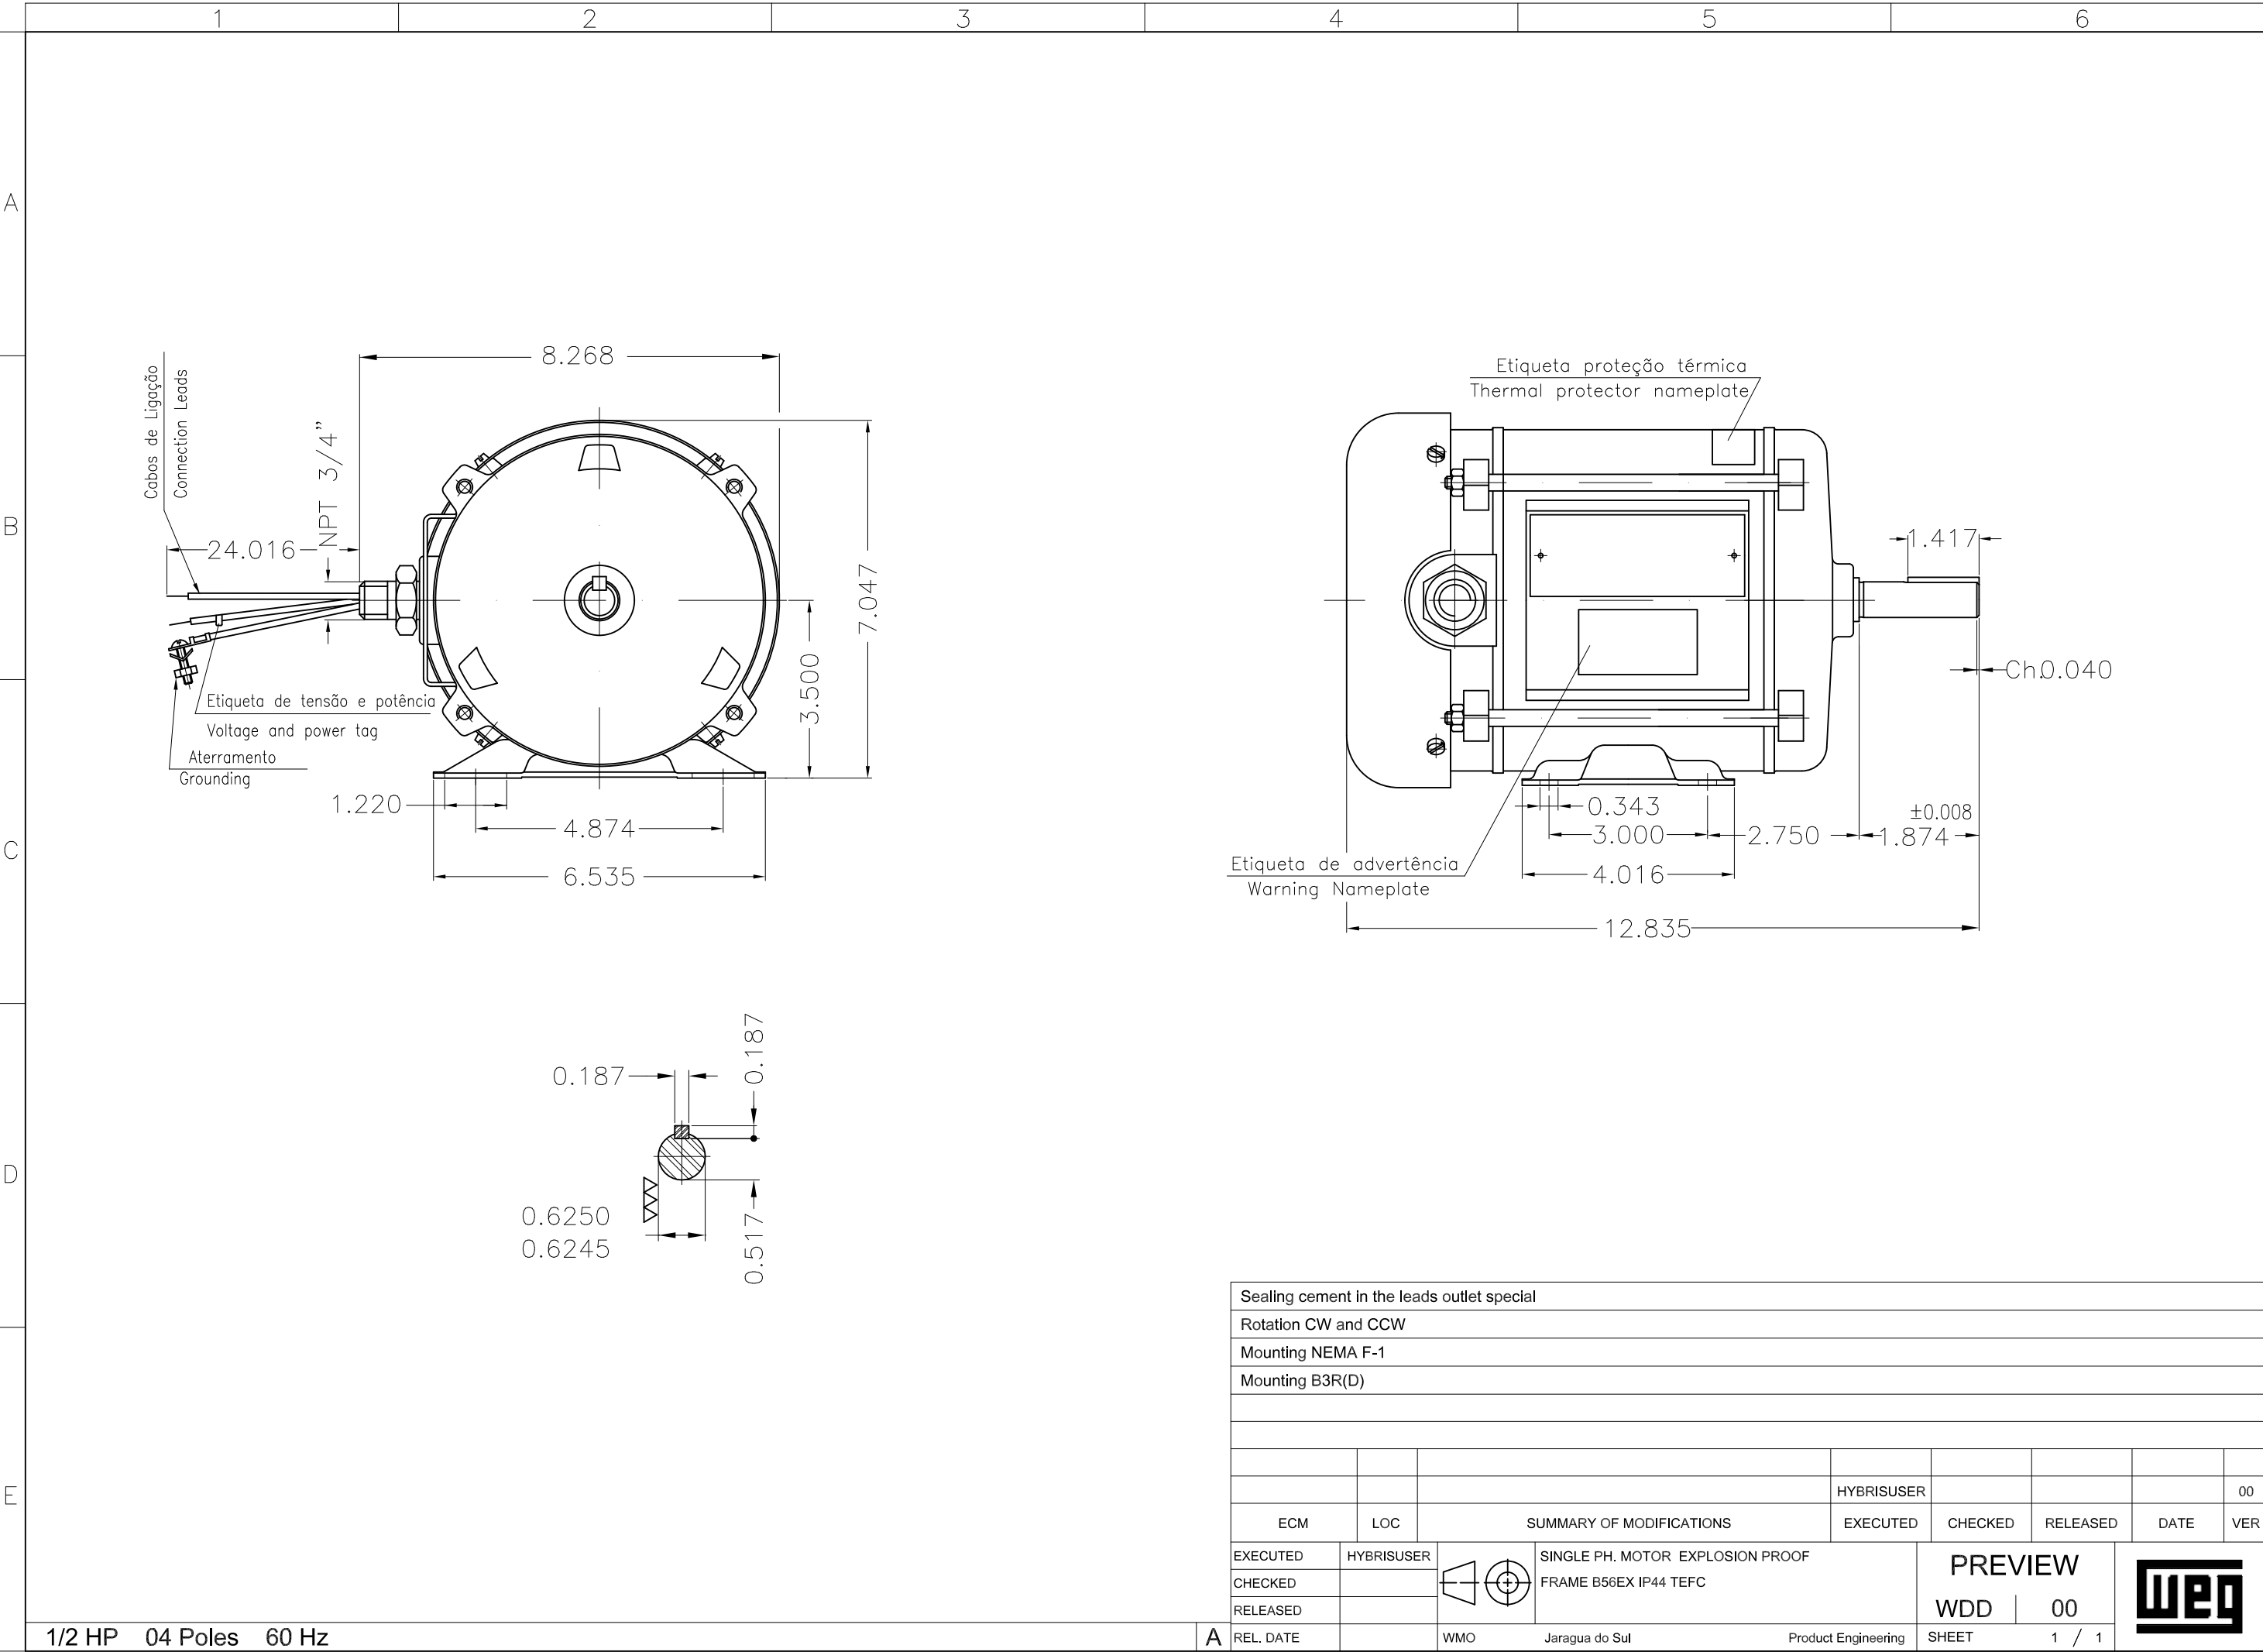

Sealing cement in the leads outlet special									
Rotation CW and CCW									
Mounting NEMA F-1									
Mounting B3R(D)									