

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Premium Efficiency Three-Phase	Product code :	13484339
Frame	: 56C	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 16.7 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0052 kgm ²	
Design	: B			
Output [HP]	1			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	1.18			
L. R. Amperes [A]	10.1			
LRC [A]	8.6x(Code M)			
No load current [A]	0.712			
Rated speed [RPM]	1765			
Slip [%]	1.94			
Rated torque [kgfm]	0.411			
Locked rotor torque [%]	280			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	34s (cold) 19s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%	81.0		
	50%	82.5		
	75%	84.0		
	100%	85.5		
Power Factor	25%	0.30		
	50%	0.52		
	75%	0.66		
	100%	0.75		
Bearing type	: Drive end 6204 ZZ	Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring	Without Bearing Seal	Max. traction : 31 kgf	
Lubrication interval	: -	-	Max. compression : 48 kgf	
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by				
Date	11/05/2022		Page 1 / 2	Revision


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Premium Efficiency Three-Phase Product code : 13484339

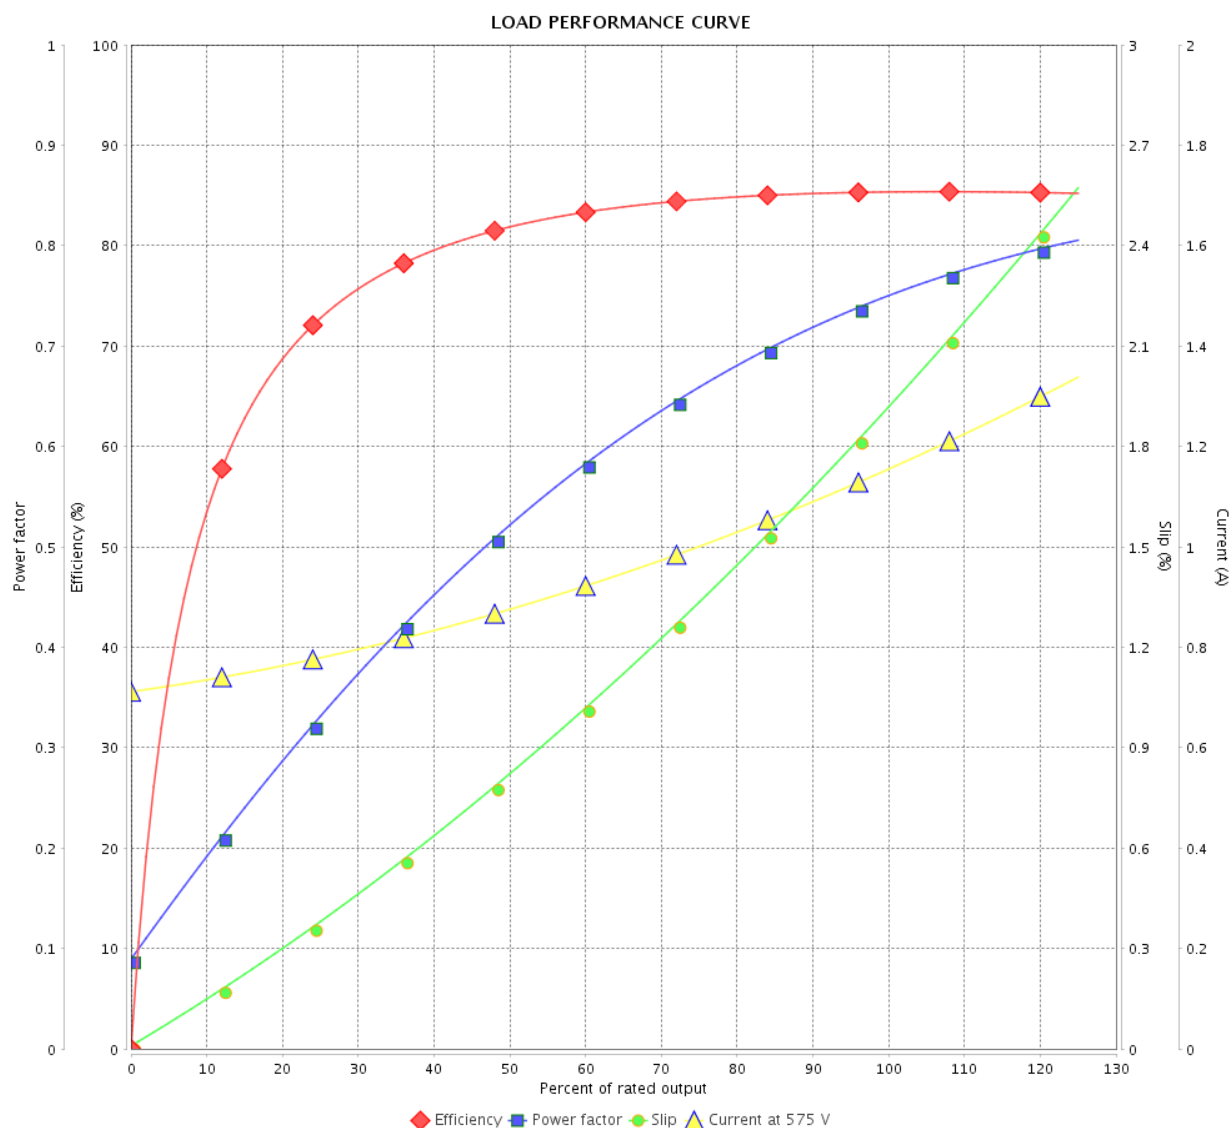

Performance : 575 V 60 Hz 4P

Rated current	: 1.18 A	Moment of inertia (J)	: 0.0052 kgm ²
LRC	: 8.6	Duty cycle	: Cont.(S1)
Rated torque	: 0.411 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1765 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	11/05/2022			

