DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Premium Efficiency Three-Phase	Product code :	13484359

Frame	: 56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation[1]	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight[3]	: 18.6 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0055 kgm²
Design	: B		

Output [HP]		2	2	2
Poles		4	4	4
Frequency [Hz]		60	50	50
Rated voltage [V]		230/460	190-220/380	415
Rated current [A]		5.44/2.72	6.50-5.61/3.25	3.07
L. R. Amperes [A]		44.6/22.3	39.0-33.7/19.5	21.8
LRC [A]		8.2x(Code K)	6.0x(Code H)	7.1x(Code J)
No load current [A]		2.80/1.40	2.75-2.37/1.37	1.64
Rated speed [RPM]		1745	1415	1435
Slip [%]		3.06	5.67	4.33
Rated torque [kgfm]		0.832	1.03	1.01
Locked rotor torque [%]		270	210	270
Breakdown torque [%]		300	240	300
Service factor			1.15	1.15
Temperature rise		80 K	80 K	80 K
Locked rotor time		27s (cold) 15s (hot)	25s (cold) 14s (hot)	21s (cold) 12s (hot)
Noise level[2]		52.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%			
	50%	85.5	85.4	84.2
	75%	87.5	84.9	85.1
	100%	86.5	82.6	84.0
Power Factor	25%			
	50%	0.60	0.68	0.60
	75%	0.73	0.80	0.73
	100%	0.80	0.85	0.81

		Drive end	Non drive end
Bearing type	:	6204 ZZ	6202 ZZ
Sealing	:	V'Ring	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 88 kgf

Max. compression : 107 kgf

Notes

USABLE @208V 6.02A SF 1.00 SFA 6.02A

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

(2) Measured at 1m and with tolerance of +3dB(A).

(3) Approximate weight subject to changes after manufacturing process.

(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Premium Efficiency Three-Phase	Product code :	13484359

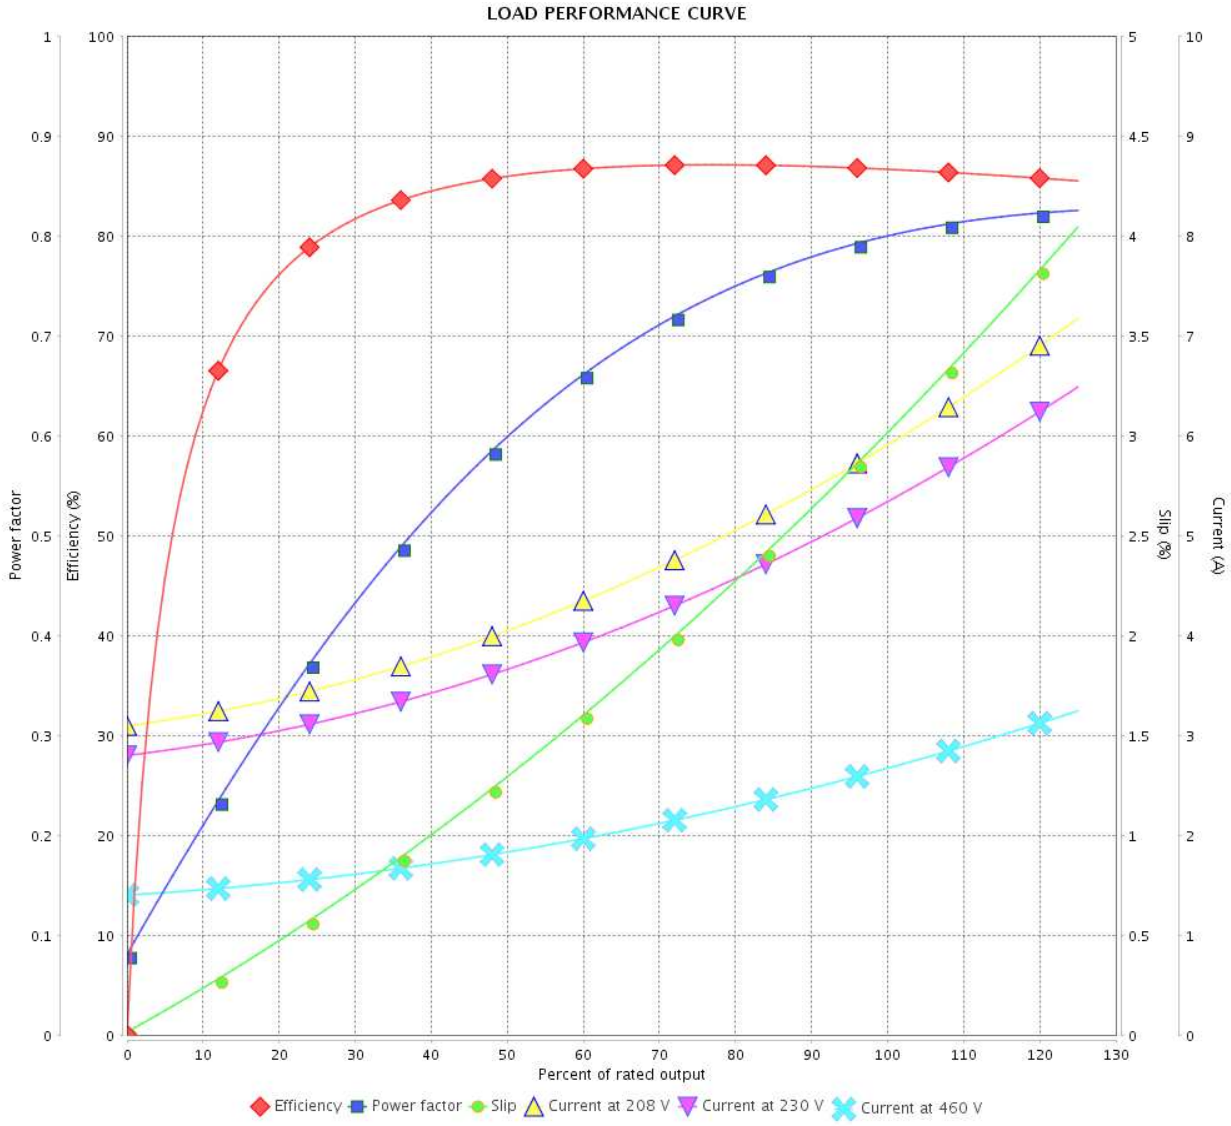

Performance	: 230/460 V 60 Hz 4P		
Rated current	: 5.44/2.72 A	Moment of inertia (J)	: 0.0055 kgm²
LRC	: 8.2	Duty cycle	: Cont.(S1)
Rated torque	: 0.832 kgfm	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	:
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1745 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	11/05/2022		2 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Premium Efficiency Three-Phase	Product code :	13484359

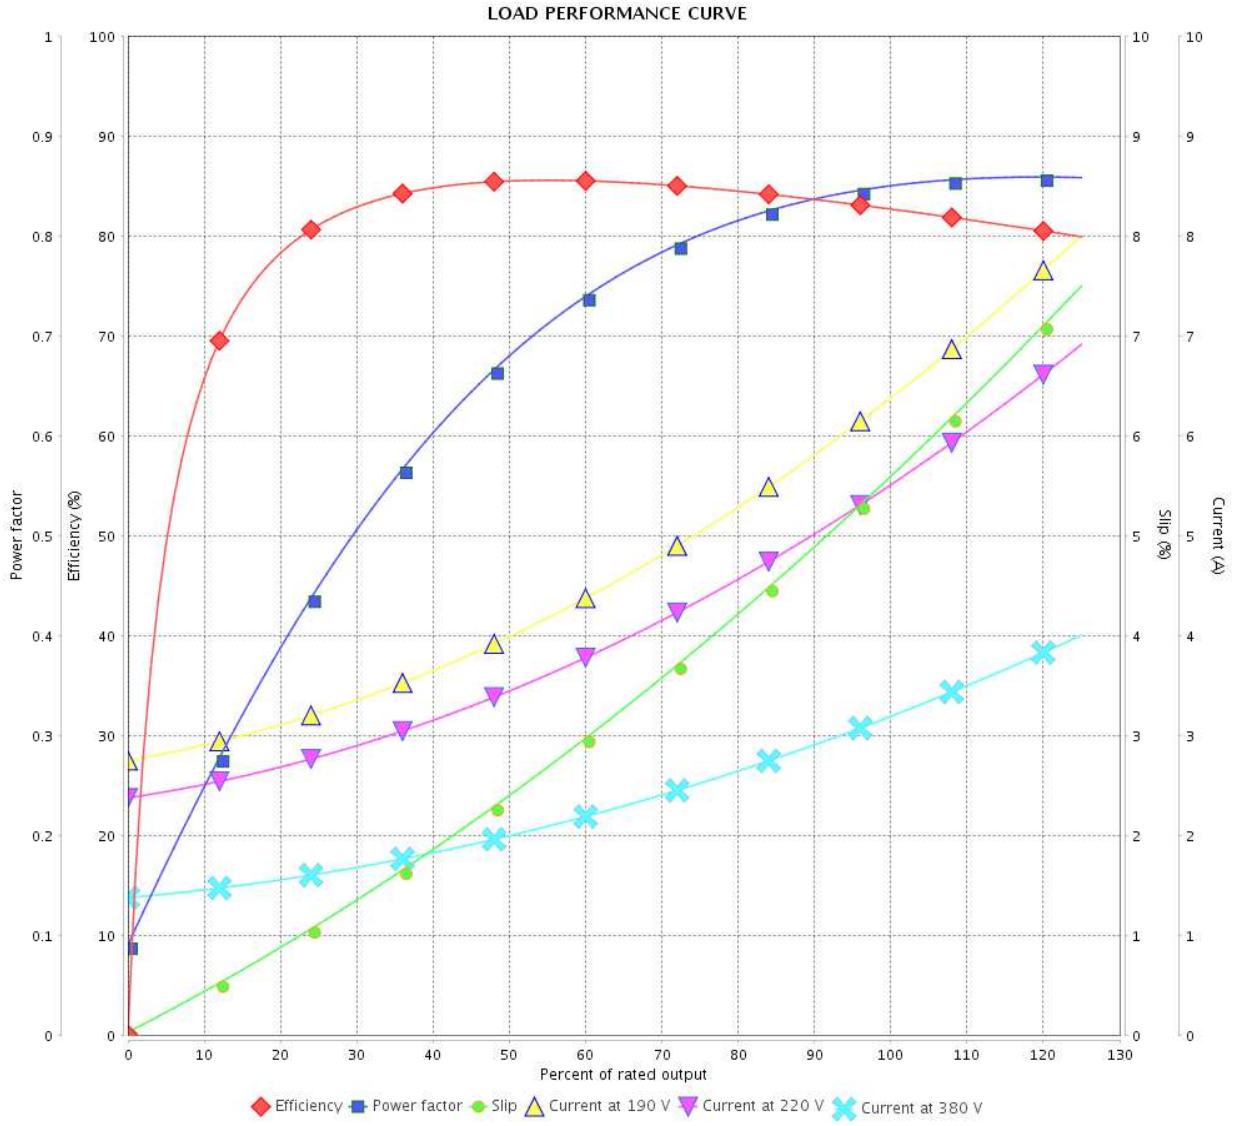

Performance	: 190-220/380 V 50 Hz 4P		
Rated current	: 6.50-5.61/3.25 A	Moment of inertia (J)	: 0.0055 kgm²
LRC	: 6.0	Duty cycle	: Cont.(S1)
Rated torque	: 1.03 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 1415 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	11/05/2022		3 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Premium Efficiency Three-Phase	Product code :	13484359

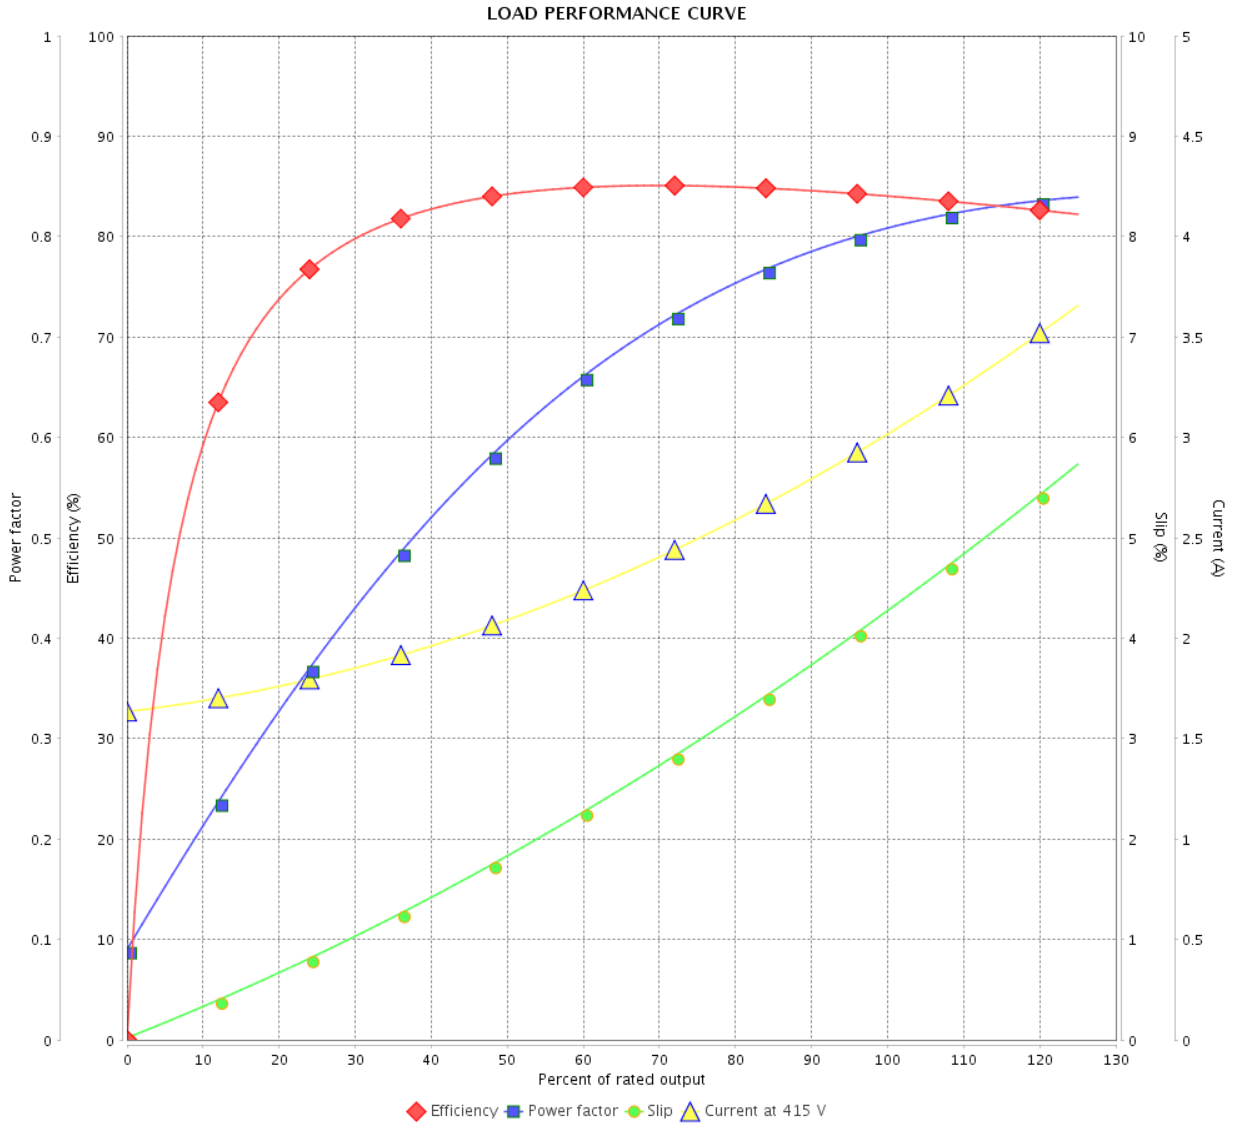



Performance	: 415 V 50 Hz 4P		
Rated current	: 3.07 A	Moment of inertia (J)	: 0.0055 kgm²
LRC	: 7.1	Duty cycle	: Cont.(S1)
Rated torque	: 1.01 kgfm	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1435 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	11/05/2022		4 / 4	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

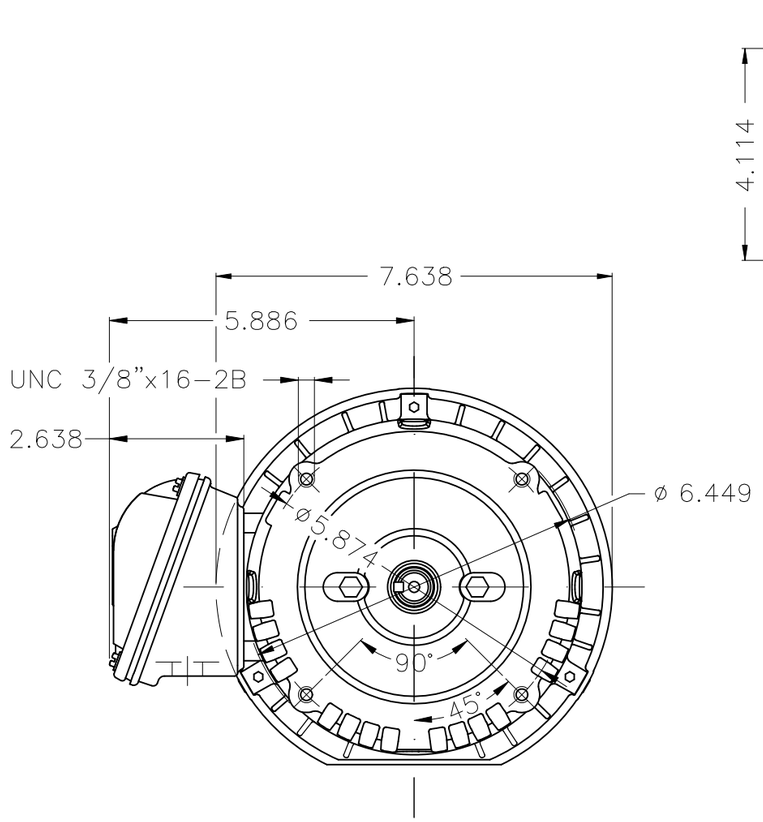

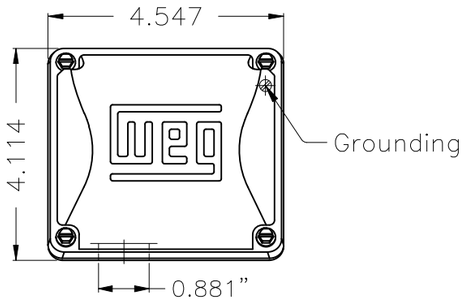

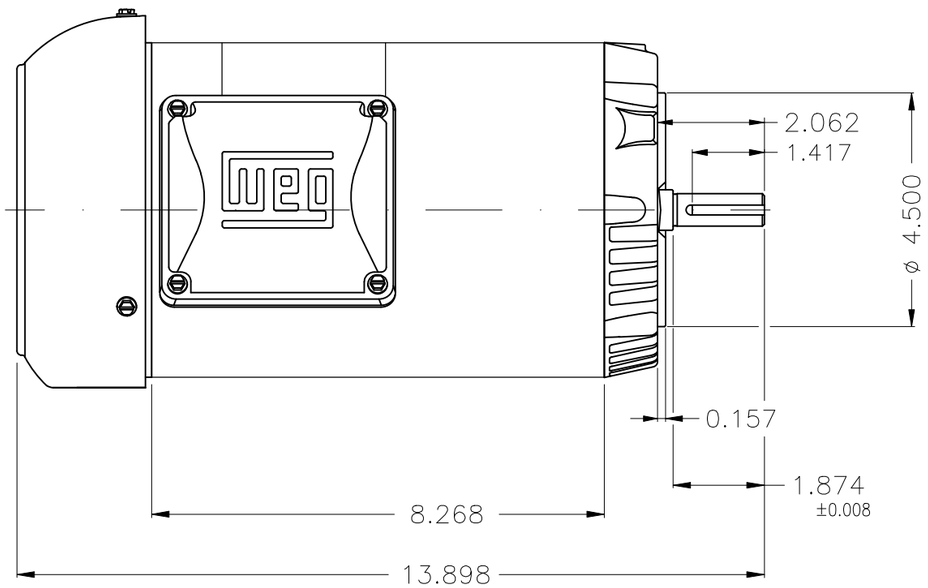



Fan cover - steel plate
Color Munsell N 1 matte black
Painting plan 207N
Mounting F-1/B14R(D)

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL PREM. EFF.	PREVIEW		
CHECKED		FRAME 56C IP55 TEFC	WDD	00	
RELEASED					
REL. DATE		WMO Jaragua do Sul Product Engineering	SHEET	1 / 1	

2 HP 04 Poles 60 Hz

A

Dimensions in inches

XME A3

WEG's property. Forbidden reproduction without previous authorization.