DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line	: W22 Cooling Tower NEMA Premium Efficiency Three-Phase	Product code :	15946318

Frame	: 254/6T	Locked rotor time	: 37s (cold) 21s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 14.4 A	Protection degree	: IP55
L. R. Amperes	: 92.2 A	Cooling method	: IC411 - TEFC
LRC	: 6.4x(Code G)	Mounting	: W-5
No load current	: 5.84 A	Rotation[1]	: Both (CW and CCW)
Rated speed	: 1770 rpm	Noise level[2]	: 64.0 dB(A)
Slip	: 1.67 %	Starting method	: Direct On Line
Rated torque	: 6.15 kgfm	Approx. weight[3]	: 114 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.1104 kgm²		
Design	: B		

Output	50%	75%	100%
Efficiency (%)	91.0	91.7	92.4
Power Factor	0.68	0.78	0.83

Foundation loads

Max. traction	: 174 kgf
Max. compression	: 309 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.1	7.0	6.5	3.9	2.8	1.8	1.3

		Drive end	Non drive end
Bearing type	:	6309 2RS C3	6209 2RS C3
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	02/07/2026		1 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Space heater information

Voltage: 110-127/200-240 V

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	02/07/2026		2 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Cooling Tower NEMA Premium Efficiency Three-Phase

Product code : 15946318

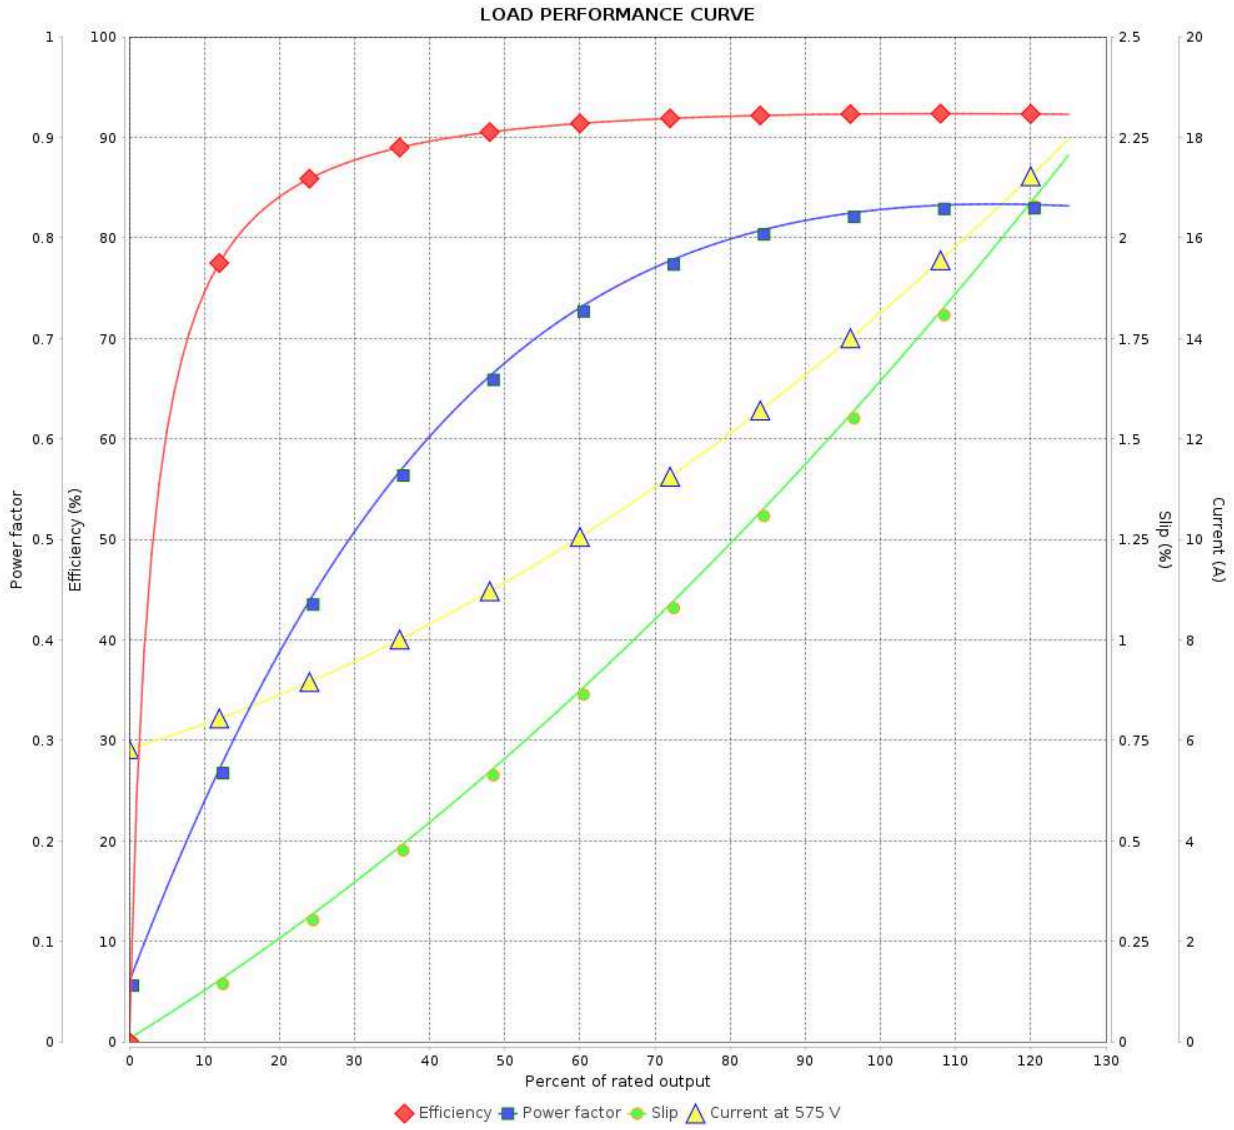



Performance	: 575 V 60 Hz 4P		
Rated current	: 14.4 A	Moment of inertia (J)	: 0.1104 kgm²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 6.15 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B


Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	02/07/2026		3 / 3	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

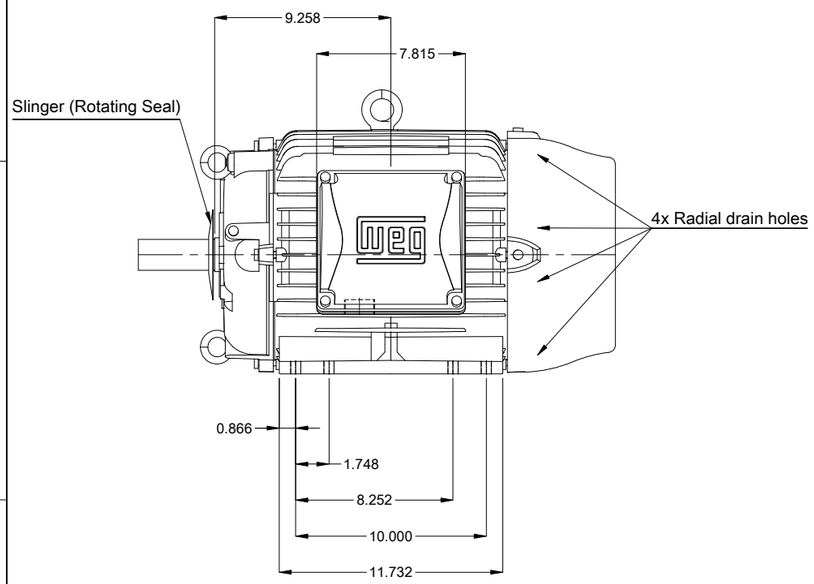

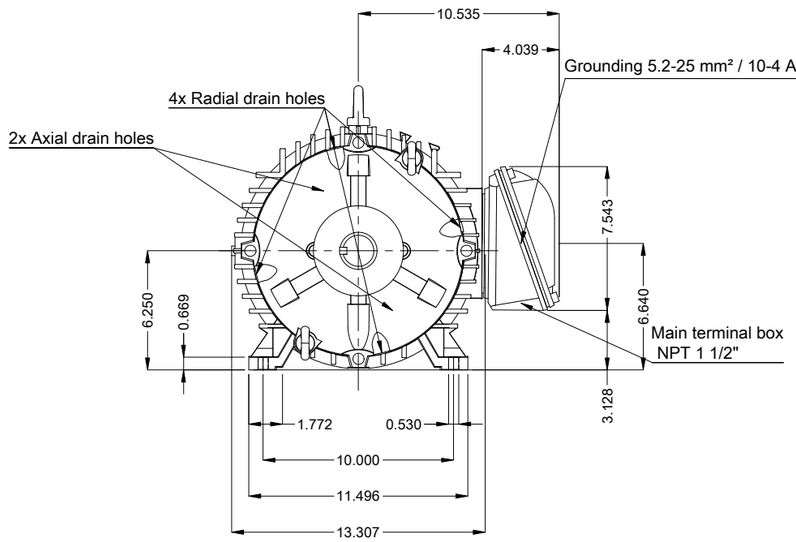

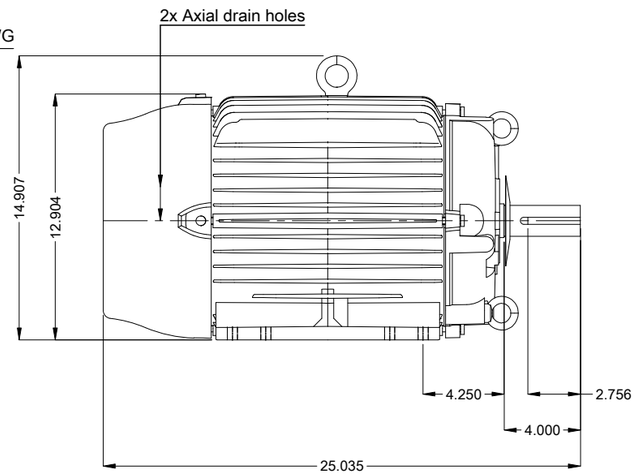

DE Shaft End



DUNC 5/8"-11 WEG WPR-7339

Color RAL 5009
Painting plan 222E
Mounting NEMA W-5
Mounting V6L(E)

15 HP 04 Poles 60 Hz | A

Scale 1 : 8

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR COOLING TOWER W22 NEMA PREM. EFF.
FRAME 254/6T IP55 TEFC

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.