

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 13997455		
Frame : 56C	Cooling method : IC01 - ODP			
Insulation class : F	Mounting : F-1			
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)			
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line			
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 16.5 kg			
Design : L	Moment of inertia (J) : 0.0027 kgm ²			
Output [HP]	1.5			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	13.3/6.90-6.65			
L. R. Amperes [A]	102/53.1-51.2			
LRC [A]	7.7x(Code J)			
No load current [A]	3.20/1.38-1.60			
Rated speed [RPM]	3500			
Slip [%]	2.78			
Rated torque [kgfm]	0.311			
Locked rotor torque [%]	260			
Breakdown torque [%]	270			
Service factor				
Temperature rise	80 K			
Locked rotor time	18s (cold) 10s (hot)			
Noise level ²	58.0 dB(A)			
Efficiency (%)	25%			
	50%	73.0		
	75%	79.0		
	100%	81.5		
Power Factor	25%			
	50%	0.88		
	75%	0.89		
	100%	0.89		
Bearing type : 6204 ZZ	Drive end	Non drive end	Foundation loads	
Sealing : Without			Max. traction	: 18 kgf
	Bearing Seal	Bearing Seal	Max. compression	: 35 kgf
Lubrication interval : -	-	-		
Lubricant amount : -	-	-		
Lubricant type : Mobil Polyrex EM				
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by			Page 1 / 2	Revision
Checked by				
Date	11/05/2022			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 13997455

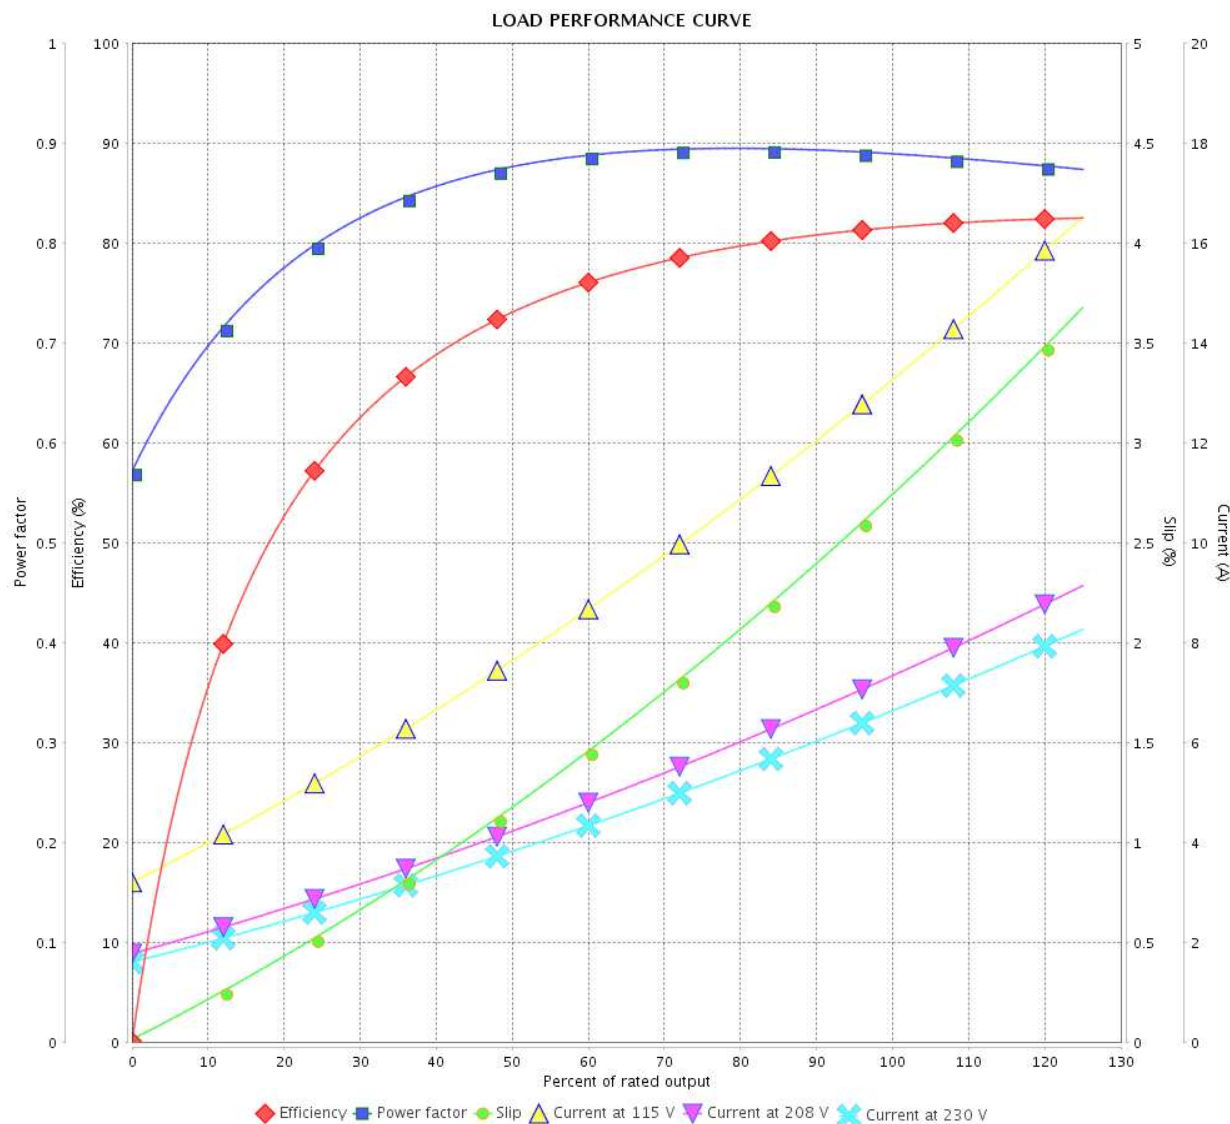



Performance : 115/208-230 V 60 Hz 2P

Rated current : 13.3/6.90-6.65 A
 LRC : 7.7
 Rated torque : 0.311 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 270 %
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0027 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : L

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

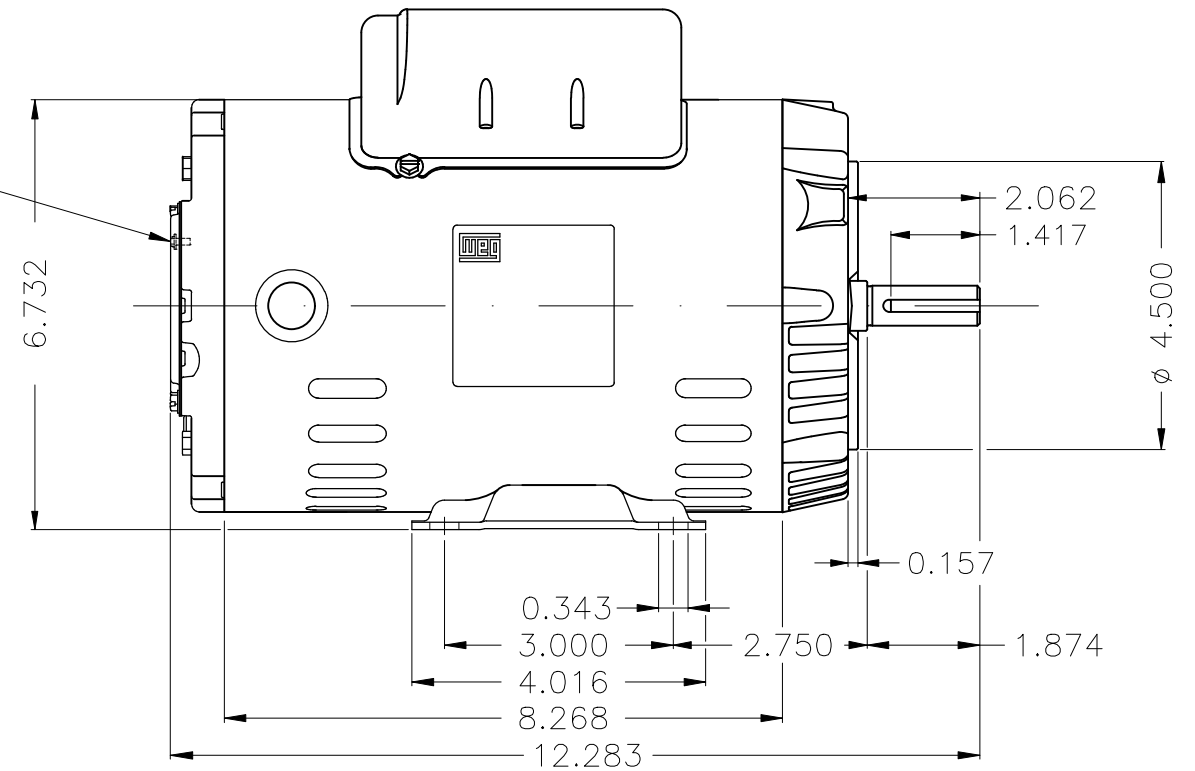

Color Munsell N 1 matte black										
Painting plan 207N										
Mounting B34D										
						HYBRISUSER			00	
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		SINGLE PH. MOTOR ROLLED STEEL PREM. EFF. FRAME 56C IP21 ODP				PREVIEW WDD 00			
CHECKED										
RELEASED										
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1				