

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency

Frame	: 143/5TC	Locked rotor time	: 22 s (hot) 40 s (cold)
Output	: 1 HP (0.75 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 208-230/460 V	Altitude	: 3280 ft
Rated current	: 3.19-2.88/1.44 A	Protection degree	: IP55
L. R. Amperes	: 24.8-22.5/11.2 A	Cooling method	: IC411 - TEFC
LRC	: 7.8	Mounting	: F-1/B14R(D)
No load current	: 1.21-1.40/0.700 A	Rotation ¹	: Both
Rated speed	: 3510 rpm	Noise level ²	: 68.0 dB(A)
Slip	: 2.50 %	Vibration class	: A
Rated torque	: 1.48 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 200 %	Approx. weight ³	: 29.4 lb
Pull up torque	: 170 %	Painting plan	: 207N
Breakdown torque	: 300 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0641 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	72.0	77.0	78.5	Load torque	: -
Power Factor	0.65	0.76	0.83	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads
Bearing type #1	6205-ZZ	6203-ZZ	Max. traction
Bearing type #2	-	-	Max. compression
Lubrication interval	-	-	
Lubricant amount #1	-	-	
Lubricant amount #2	-	-	
Lubricant type	MOBIL POLYREX EM		

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1858899613	
Checked by	AUTOMATICO			Page	Rev.
Date	10/06/2026			1 / 2	0

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer

: V.J. PAMENSKY CANADA INC.



Product line

: W01 - TEFC - Nema Premium Efficiency

Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7		
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12		
	Noise	: MG1 - Part 9				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.			
Rev.		Changes Summary		Rev.	Checked	Date
Performed by		farazq	1858899613			
Checked by		AUTOMATICO				
Date		10/06/2026				
			Page	Rev.		
			2 / 2	0		

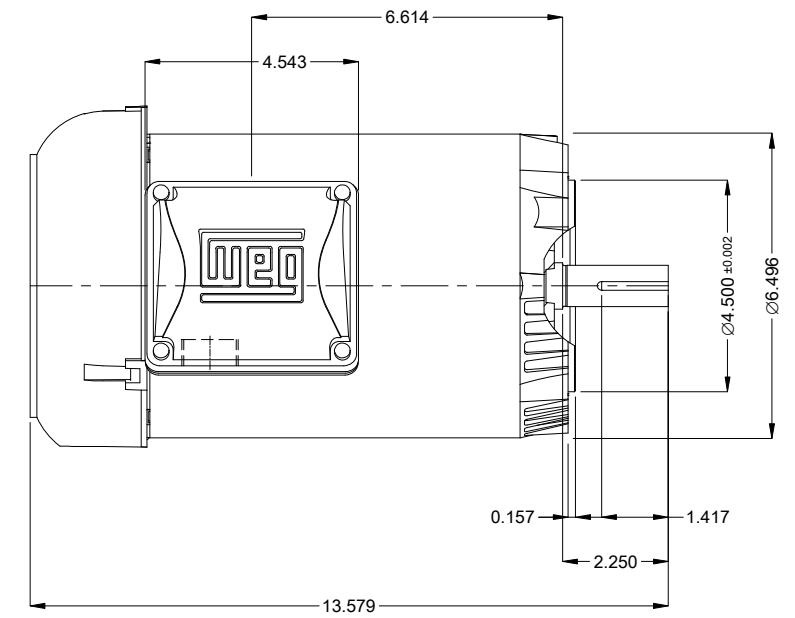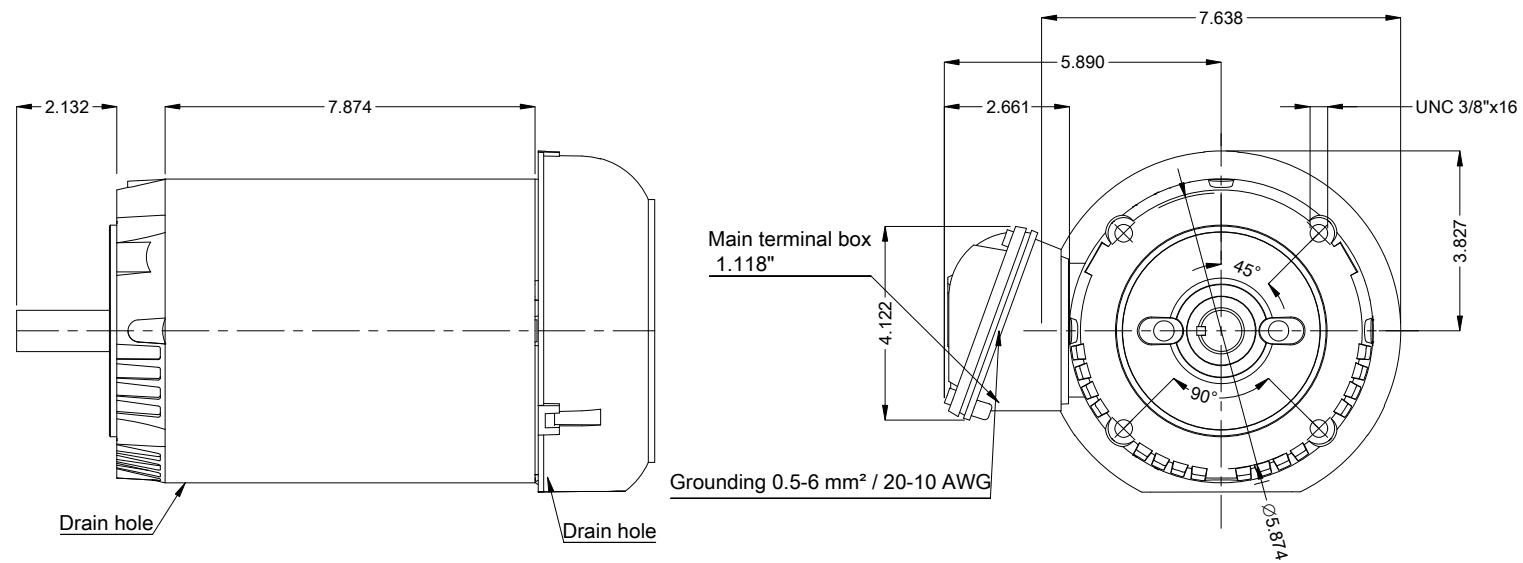

1 HP 02 Poles 60 Hz										A
V.J. PAMENSKY CANADA INC.										
						Scale			1 : 4	
						PIRWUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWUSER	 THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 143/5TC IP55 TEFC				PREVIEW WDD 00				
CHECKED										
RELEASED										
REL. DATE										
						SHEET		1 / 1		

Color Munsell N 1 matte black
Painting plan 207N
Mounting MARKET F-1/B14R(D)
Mounting F-1/B14R(D)

