

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency

Frame	: 213/5TC	Locked rotor time	: 10 s (hot) 18 s (cold)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 3280 ft
Rated current	: 34.1/17.1 A	Protection degree	: IP55
L. R. Amperes	: 280/140 A	Cooling method	: IC411 - TEFC
LRC	: 8.2	Mounting	: F-1/B14R(D)
No load current	: 11.2/5.60 A	Rotation ¹	: Both
Rated speed	: 3535 rpm	Noise level ²	: 70.0 dB(A)
Slip	: 1.81 %	Vibration class	: A
Rated torque	: 22.0 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 280 %	Approx. weight ³	: 172 lb
Pull up torque	: 230 %	Painting plan	: 207N
Breakdown torque	: 330 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: A
Service factor	: 1.15		
Moment of inertia (J)	: 0.6336 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	90.2	91.0	91.0	Load torque	: -
Power Factor	0.76	0.85	0.89	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads
Bearing type #1	6208-ZZ	6206-ZZ	Max. traction
Bearing type #2	-	-	Max. compression
Lubrication interval	-	-	
Lubricant amount #1	-	-	
Lubricant amount #2	-	-	
Lubricant type	MOBIL POLYREX EM		

Notes
See notes on page 2.

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.5	6.6	6.1	5.0	3.1	2.4	1.5

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq	1859574673		
Checked by	AUTOMATICO	Page	Rev.	
Date	11/06/2026	1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency

Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------


Notes


USABLE @208V 37.6A SF 1.00 SFA 37.6A

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1859574673		
Checked by	AUTOMATICO		Page	Rev.	
Date	11/06/2026		2 / 2	0	

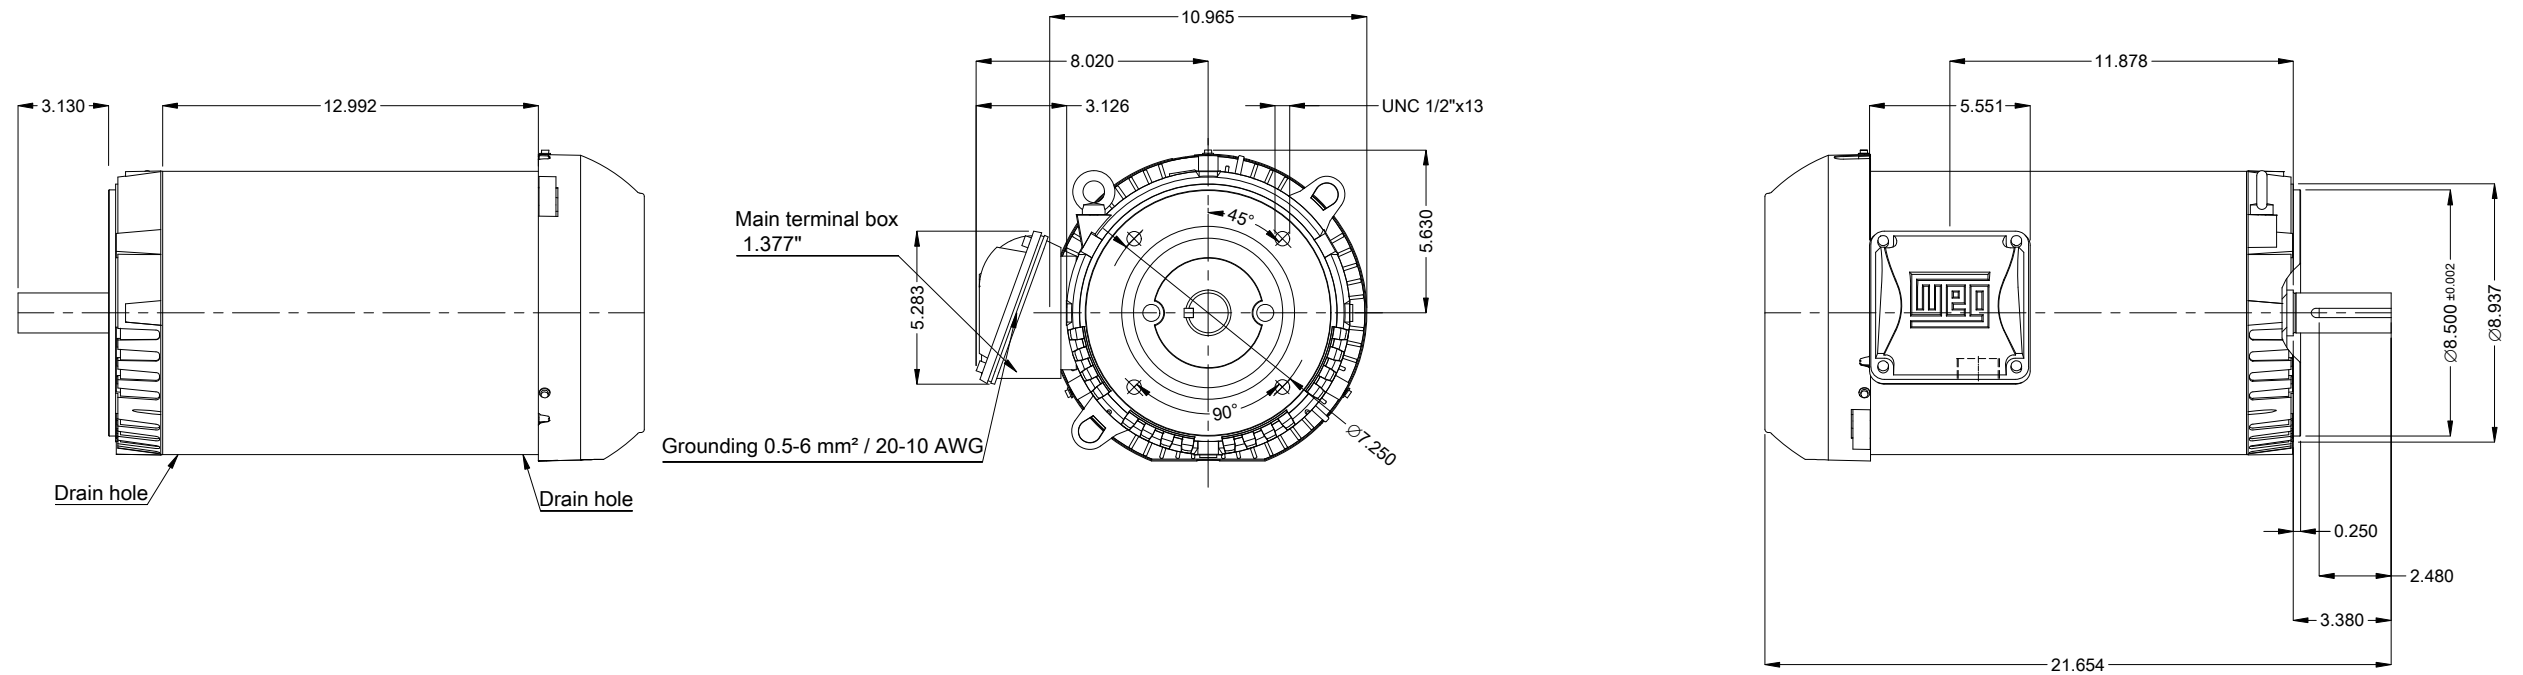

15 HP 02 Poles 60 Hz										A
V.J. PAMENSKY CANADA INC.										
						Scale			2 : 13	
						PIRWBUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	 THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 213/5TC IP55 TEFC				PREVIEW				
CHECKED						WDD 00				
RELEASED										
REL. DATE						SHEET 1 / 1				