

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel 00022 Single-Phase Product code : 14058208

Frame	: 182/4T	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 115/230 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 19.9/9.96 A	Protection degree	: IP55
	: 10.3x(Code N)	Cooling method	: IC411 - TEFC
Rated speed	: 1770 rpm	Mounting	: F-1
Rated torque	: 0.820 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 59.0 dB(A)
Service factor	: 1.15	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0137 kgm ²	Approx. weight ³	: 37.9 kg

Output	25%	50%	75%	100%	Foundation loads
Efficiency (%)	63.4	66.0	74.0	77.0	Max. traction : 48 kgf
Power Factor	0.42	0.72	0.80	0.85	Max. compression : 86 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6206 2RS	6205 2RS
Sealing	:	V'Ring	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	11/05/2026			


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage





Customer :

Product line : Rolled Steel 00022 Single-Phase Product code : 14058208

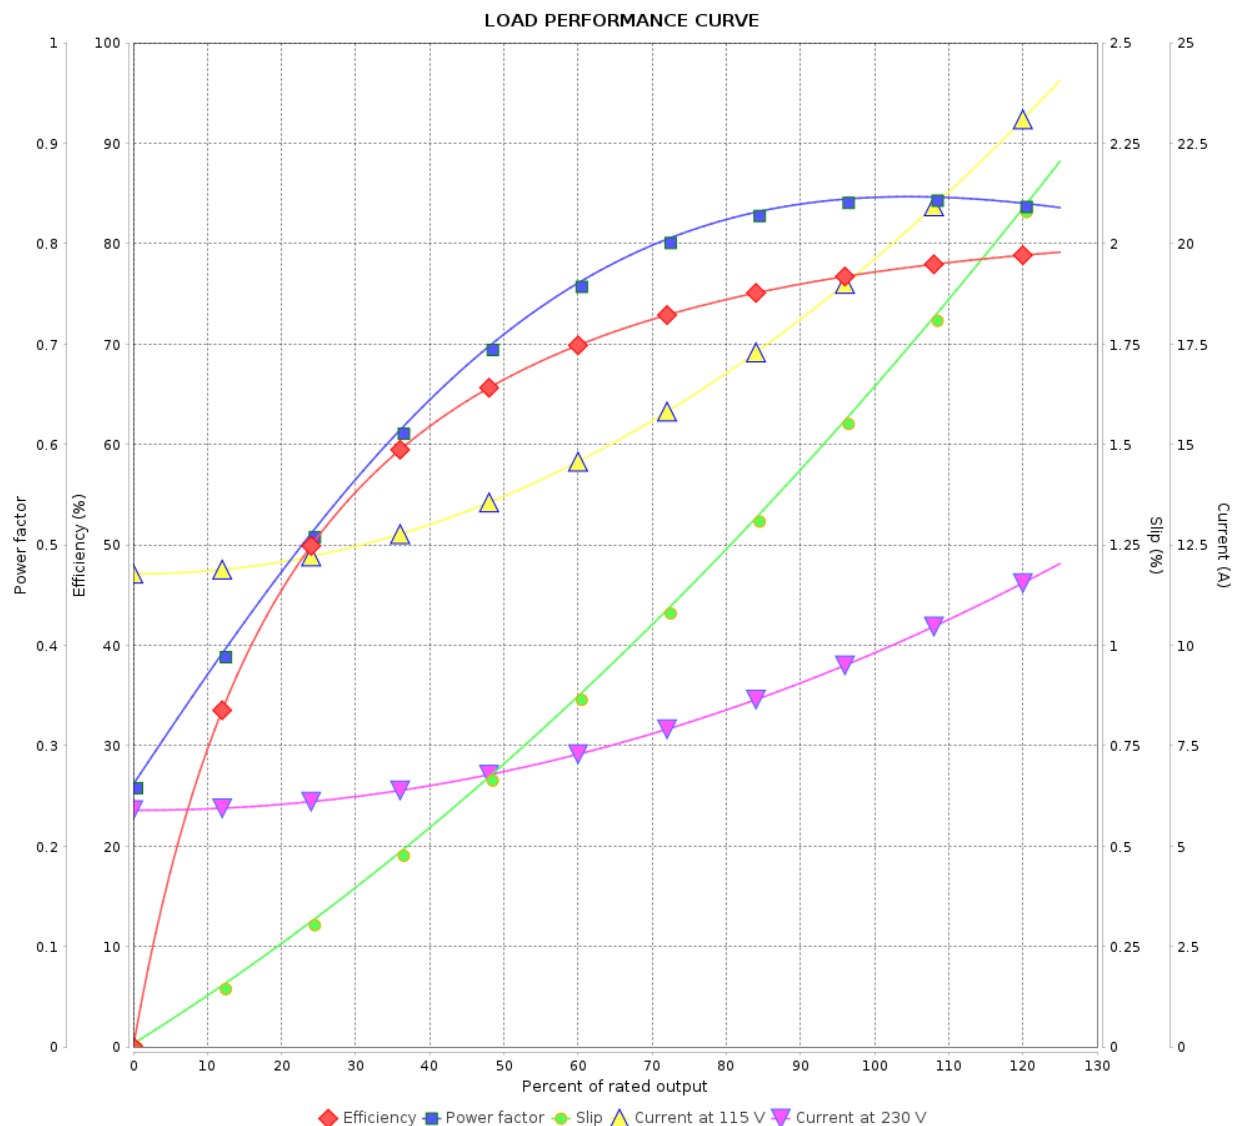

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 2 / 2Revision			
Checked by					
Date	11/05/2026				

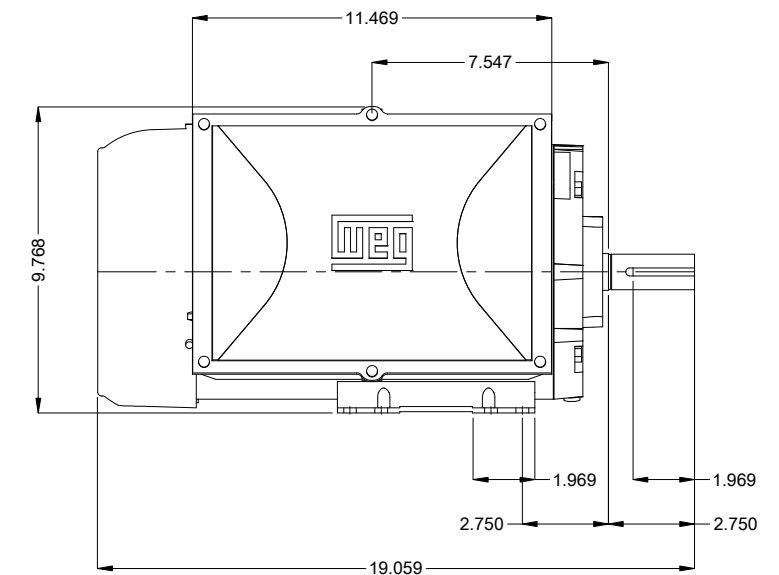

WEG's property. Forbidden reproduction without previous authorization.