

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 15584459

Frame	: 182/4TC	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-12
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 33.6 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0066 kgm ²
Design	: B		

Output [HP]	3	3	3
Poles	2	2	2
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190-220/380	415
Rated current [A]	7.34/3.67	8.70-7.51/4.35	4.07
L. R. Amperes [A]	64.6/32.3	60.0-51.8/30.0	33.4
LRC [A]	8.8x(Code K)	6.9x(Code H)	8.2x(Code J)
No load current [A]	3.22/1.61	3.18-2.74/1.59	1.80
Rated speed [RPM]	3515	2885	2910
Slip [%]	2.36	3.83	3.00
Rated torque [kgfm]	0.619	0.755	0.748
Locked rotor torque [%]	220	180	229
Breakdown torque [%]	300	280	340
Service factor	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	39s (cold) 22s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level ²	68.0 dB(A)	65.0 dB(A)	65.0 dB(A)
Efficiency (%)	25%		
	50%	84.0	85.5
	75%	86.5	86.9
	100%	86.5	86.5
Power Factor	25%		
	50%	0.71	0.71
	75%	0.82	0.82
	100%	0.87	0.87

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads	
Bearing type	: 6206 ZZ	6205 ZZ	Max. traction	: 36 kgf
Sealing	: V'Ring	Without Bearing Seal	Max. compression	: 70 kgf
Lubrication interval	: -	-		
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			

Notes

USABLE @208V 8.12A SF 1.00 SFA 8.12A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	11/05/2022		Page 1 / 4	Revision


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 15584459

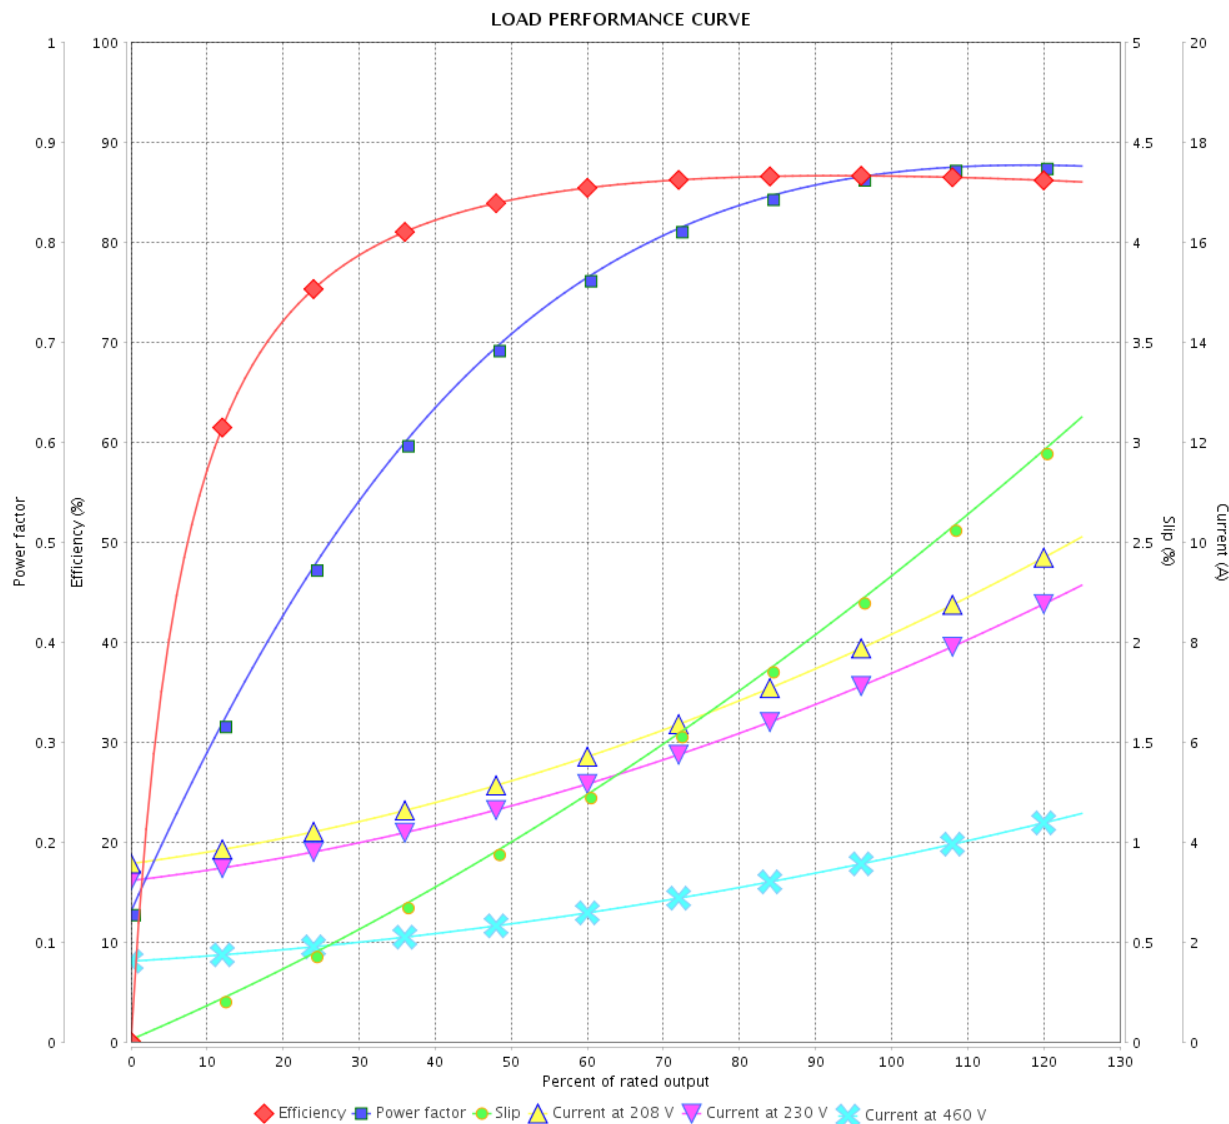

Performance : 230/460 V 60 Hz 2P

Rated current : 7.34/3.67 A
 LRC : 8.8
 Rated torque : 0.619 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 300 %
 Rated speed : 3515 rpm

Moment of inertia (J) : 0.0066 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 4	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 15584459

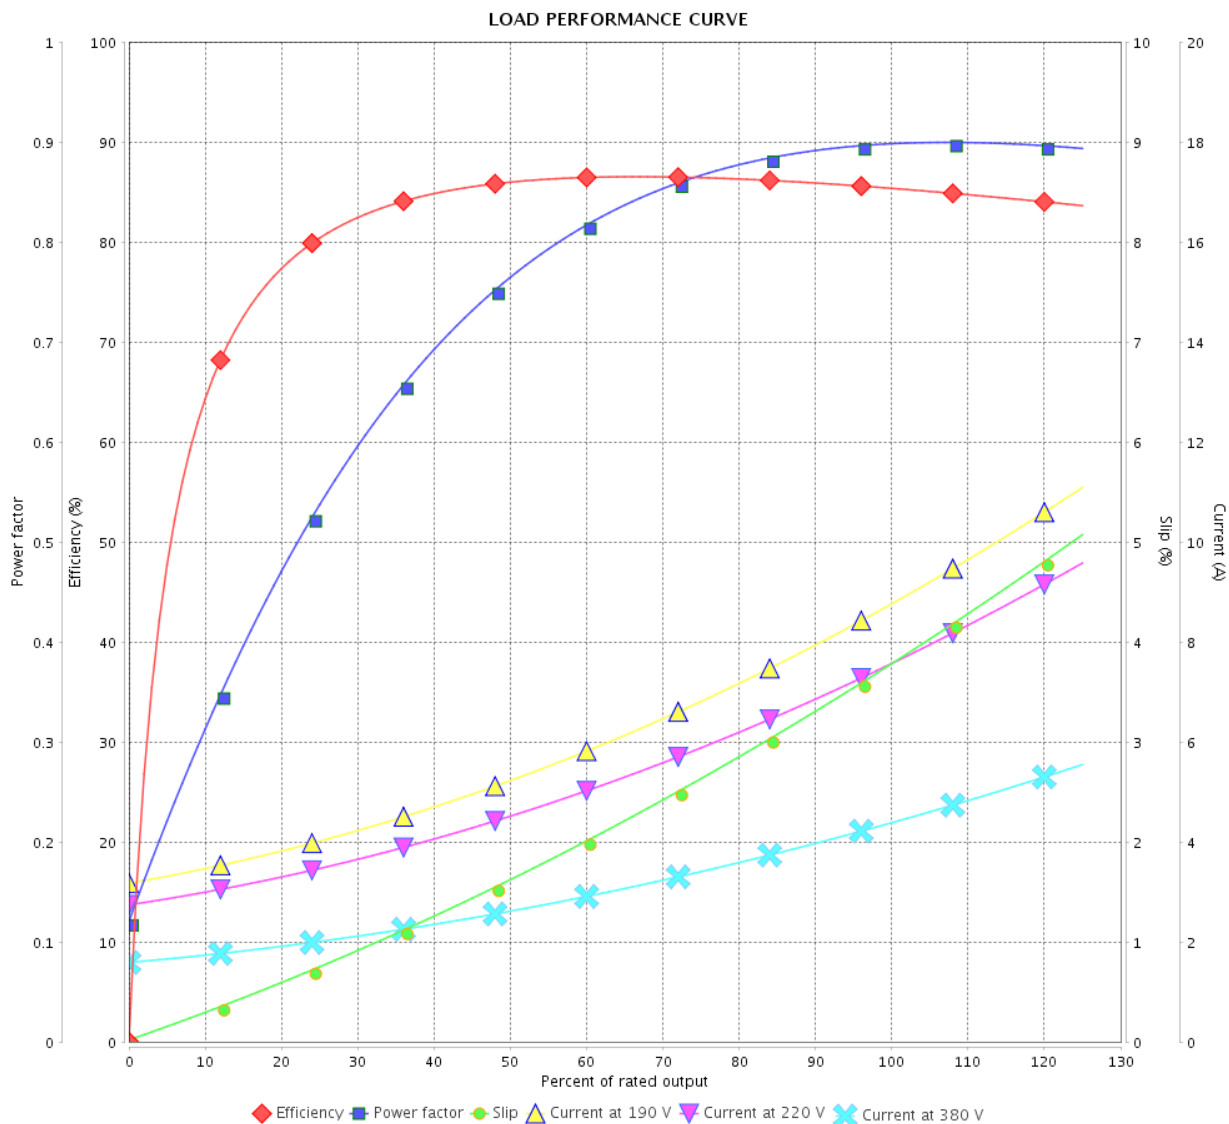

Performance : 190-220/380 V 50 Hz 2P

Rated current : 8.70-7.51/4.35 A
 LRC : 6.9
 Rated torque : 0.755 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 280 %
 Rated speed : 2885 rpm

Moment of inertia (J) : 0.0066 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 3 / 4
Checked by				
Date				
11/05/2022				Revision


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 15584459

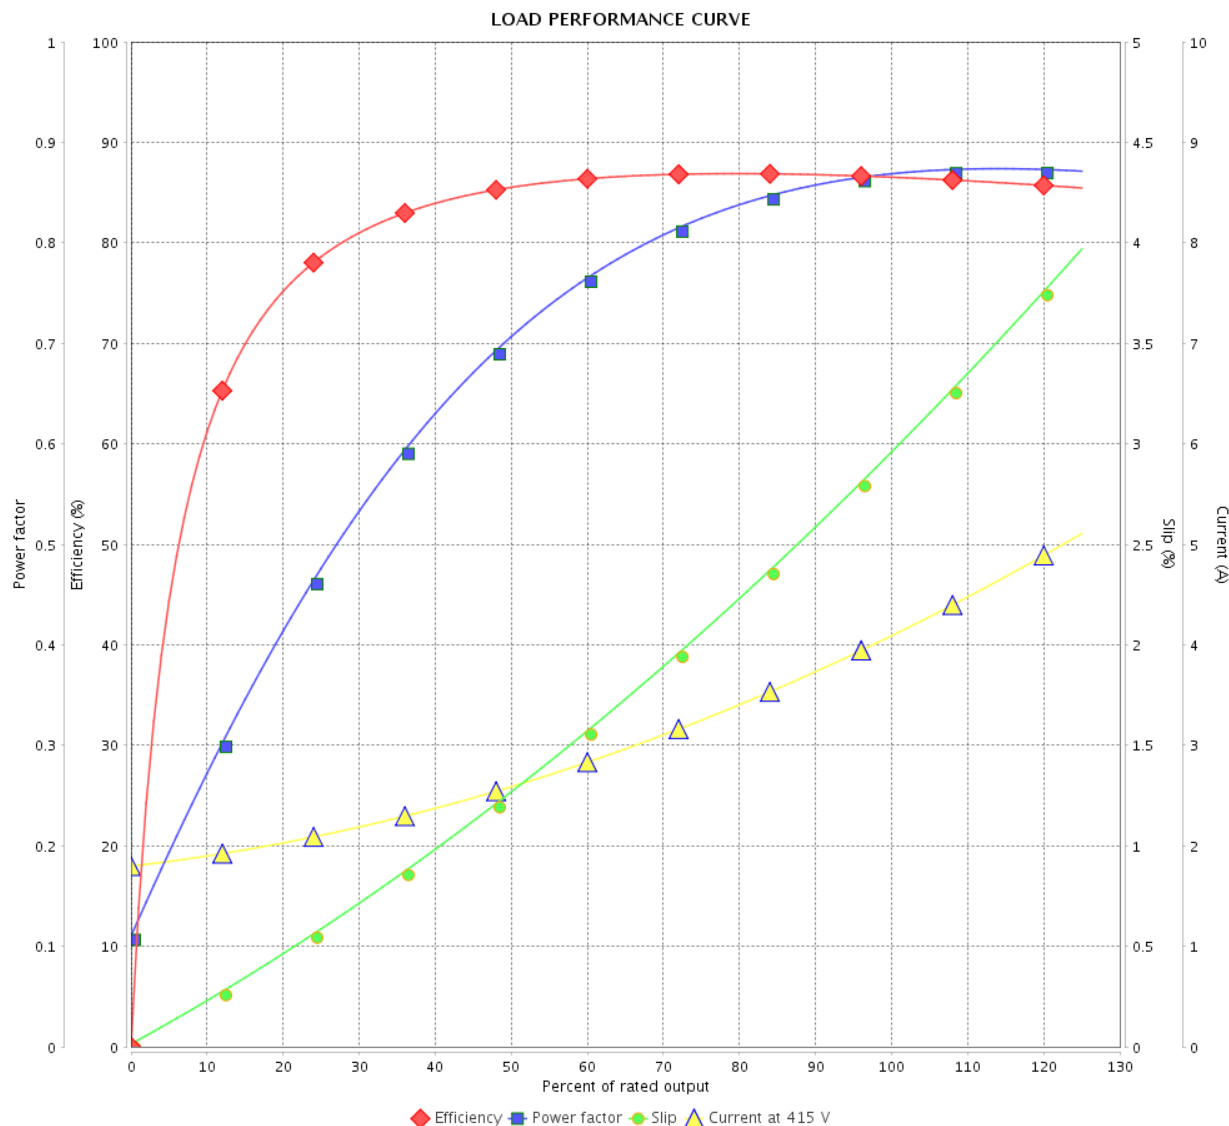

Performance : 415 V 50 Hz 2P

Rated current : 4.07 A
 LRC : 8.2
 Rated torque : 0.748 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 340 %
 Rated speed : 2910 rpm

Moment of inertia (J) : 0.0066 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 4	
Date					

