

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Jet Pump - C type Premium Efficiency Three-Phase	Product code :	14156820
Frame	: 56C	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 16.6 kg	
Design	: A	Moment of inertia (J)	: 0.0049 kgm ²	
Output [HP]	2	2	2	
Poles	2	2	2	
Frequency [Hz]	60	50	50	
Rated voltage [V]	230/460	190/380	220/415	
Rated current [A]	4.84/2.42	5.88/2.94	5.26/2.79	
L. R. Amperes [A]	43.1/21.5	40.6/20.3	40.0/21.2	
LRC [A]	8.9x(Code K)	6.9x(Code H)	7.6x(Code J)	
No load current [A]	1.83/0.917	1.81/0.906	1.84/0.978	
Rated speed [RPM]	3510	2890	2900	
Slip [%]	2.50	3.67	3.33	
Rated torque [kgfm]	0.414	0.502	0.501	
Locked rotor torque [%]	220	180	200	
Breakdown torque [%]	330	250	280	
Service factor		1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	25s (cold) 14s (hot)	18s (cold) 10s (hot)	18s (cold) 10s (hot)	
Noise level ²	62.0 dB(A)	60.0 dB(A)	60.0 dB(A)	
Efficiency (%)	25%			
	50%	84.0	82.5	83.5
	75%	85.5	83.0	84.0
	100%	85.5	83.4	84.3
Power Factor	25%			
	50%	0.77	0.83	0.80
	75%	0.86	0.90	0.88
	100%	0.91	0.93	0.92
Bearing type	: Drive end 6203 2RS Non drive end 6202 2RS	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction : 36 kgf		
		Max. compression : 53 kgf		
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V 5.35A SF 1.00 SFA 5.35A				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 4	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Premium
Efficiency Three-Phase

Product code : 14156820

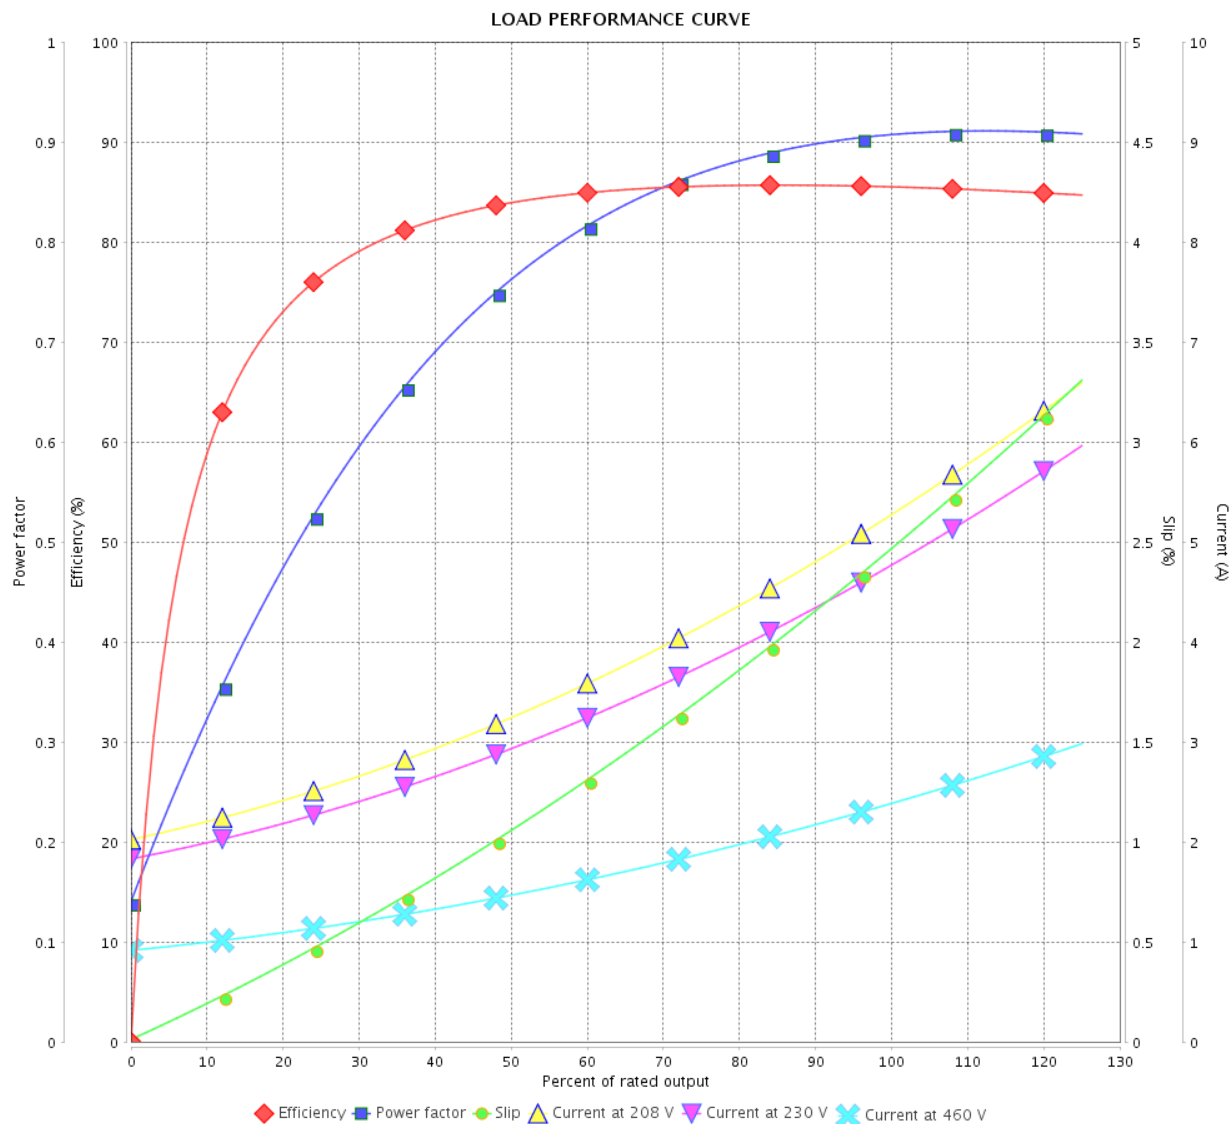

Performance : 230/460 V 60 Hz 2P

Rated current : 4.84/2.42 A
 LRC : 8.9
 Rated torque : 0.414 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 330 %
 Rated speed : 3510 rpm

Moment of inertia (J) : 0.0049 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 4	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Premium
Efficiency Three-Phase

Product code : 14156820

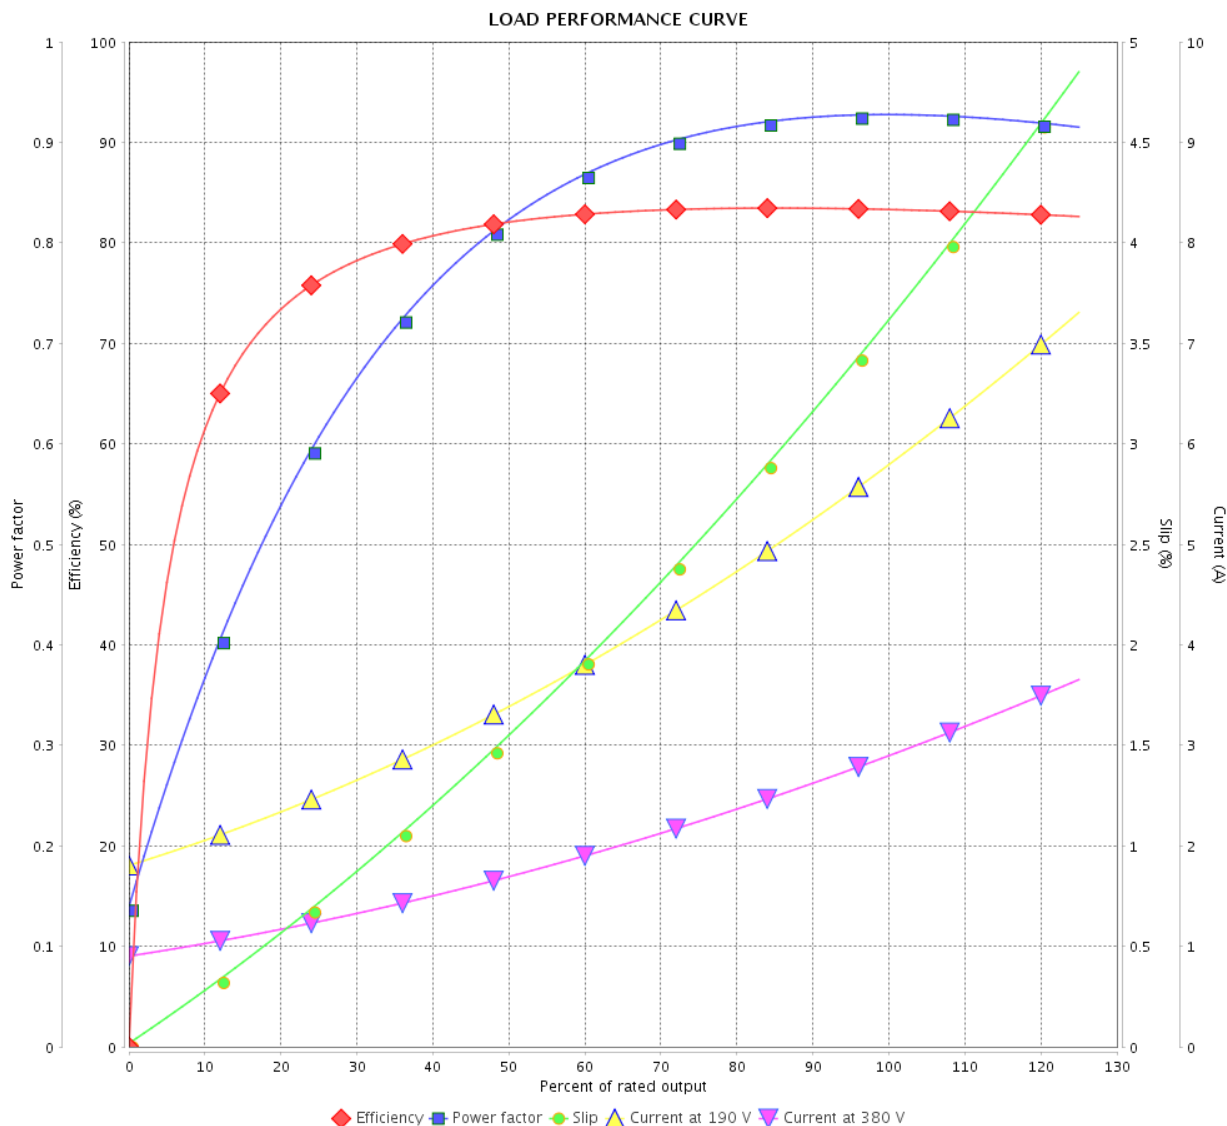

Performance : 190/380 V 50 Hz 2P

Rated current : 5.88/2.94 A
LRC : 6.9
Rated torque : 0.502 kgfm
Locked rotor torque : 180 %
Breakdown torque : 250 %
Rated speed : 2890 rpm

Moment of inertia (J) : 0.0049 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 3 / 4		Revision
Checked by					
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Premium
Efficiency Three-Phase

Product code : 14156820

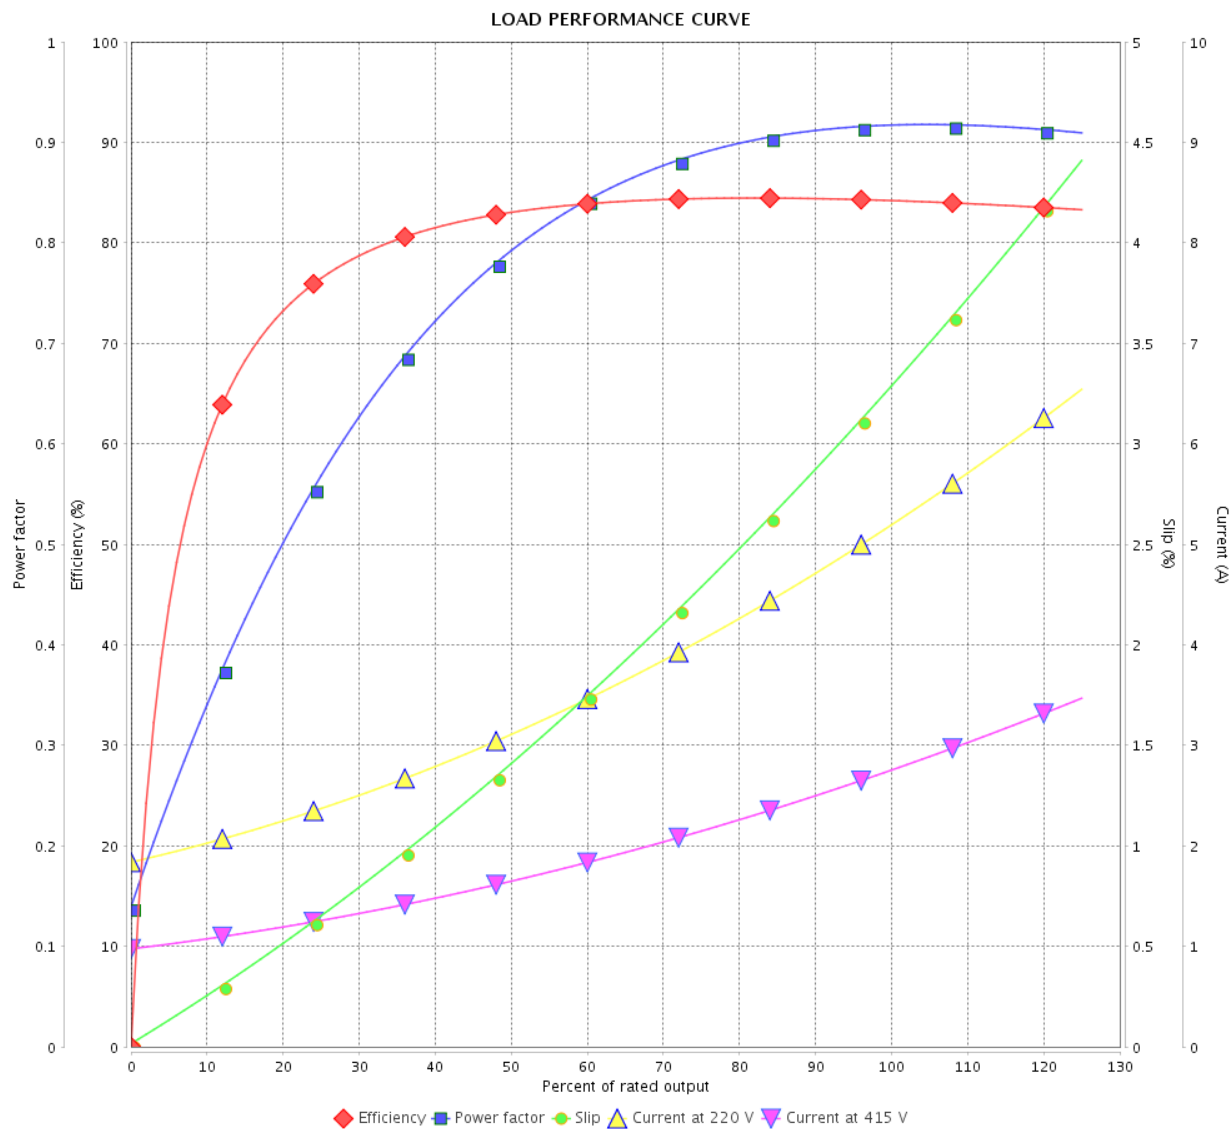



Performance : 220/415 V 50 Hz 2P

Rated current : 5.26/2.79 A
LRC : 7.6
Rated torque : 0.501 kgfm
Locked rotor torque : 200 %
Breakdown torque : 280 %
Rated speed : 2900 rpm

Moment of inertia (J) : 0.0049 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 4	
Date					

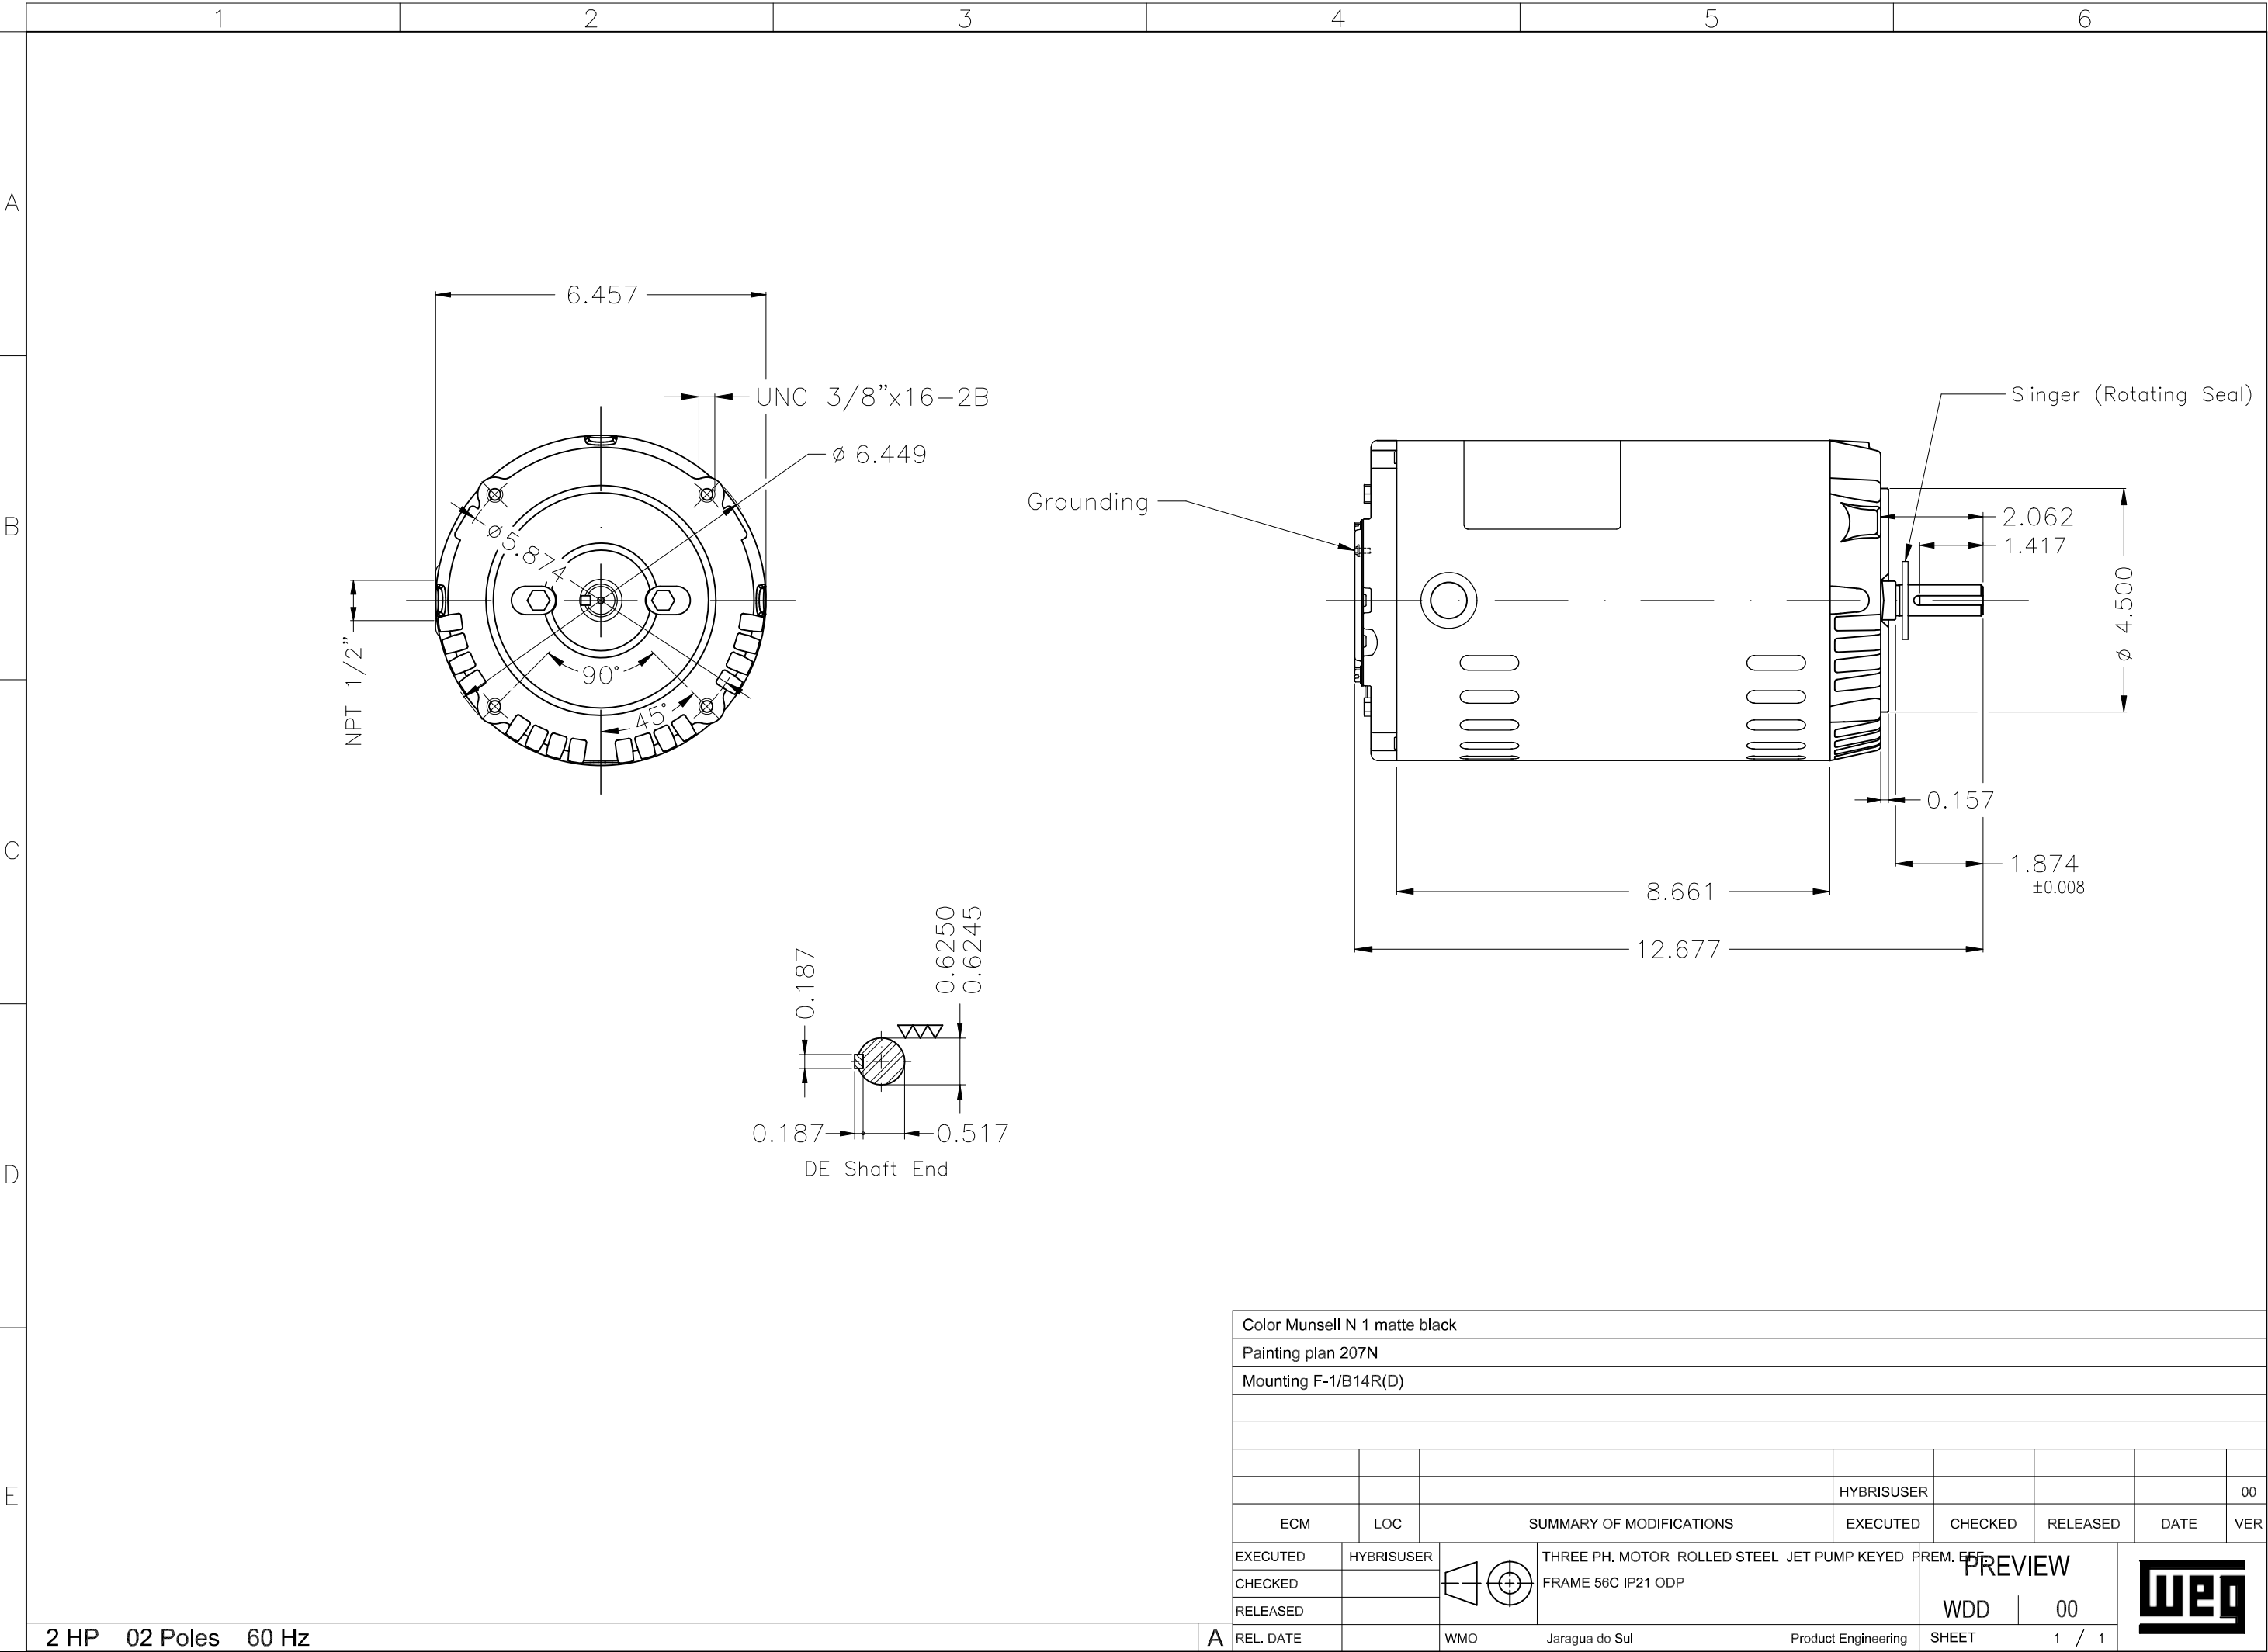

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting F-1/B14R(D)									
				HYBRISUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR ROLLED STEEL JET PUMP KEYED PREM. EFF.			PREVIEW			
CHECKED			FRAME 56C IP21 ODP						
RELEASED									
REL. DATE			WMO Jaragua do Sul Product Engineering			SHEET	1 / 1		