

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Single-Phase

Product code : 18970856

Frame	: 213/5T	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 208-230 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 33.0-31.7 A	Protection degree	: IP55
	: 7.7x(Code J)	Cooling method	: IC411 - TEFC
Rated speed	: 1750 rpm	Mounting	: F-1
Rated torque	: 3.11 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 63.0 dB(A)
Service factor	: 1.15	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0457 kgm ²	Approx. weight ³	: 81.5 kg

Output	50%	75%	100%	Foundation loads
Efficiency (%)	75.6	81.0	83.0	Max. traction : 109 kgf
Power Factor	0.82	0.88	0.91	Max. compression : 190 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6308 ZZ	6206 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:		
		00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	29/05/2026			

Page 1 / 2
Revision

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Single-Phase

Product code : 18970856

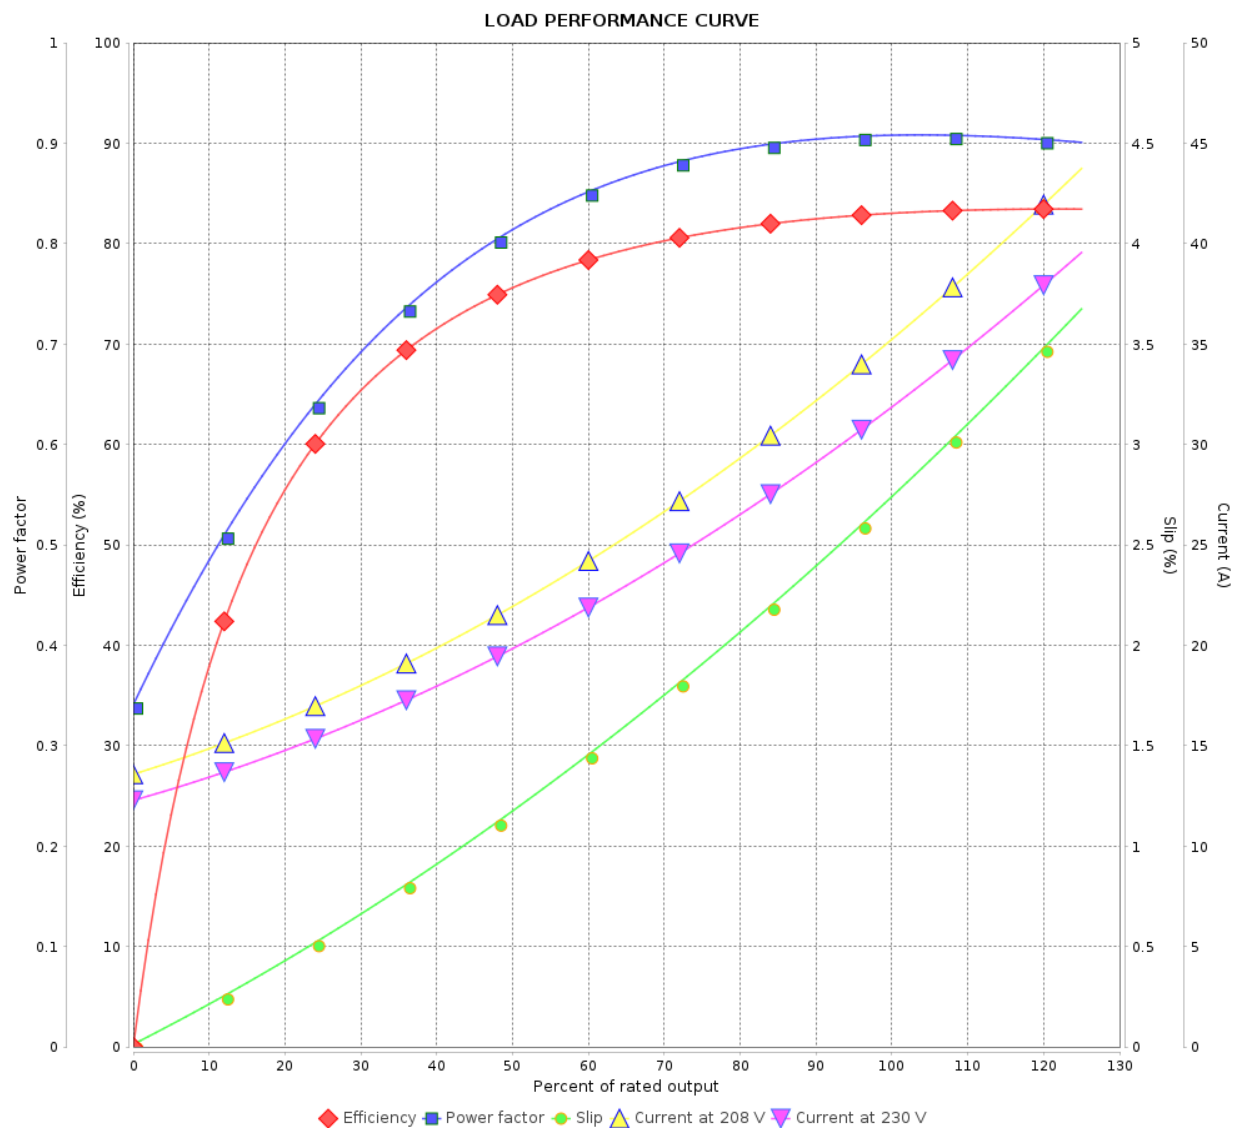

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	29/05/2026				
			Page 2 / 2	Revision	

