

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer : V.J. PAMENSKY CANADA INC.

Product line : W22 - Nema Premium Efficiency (Centro 3100)

Frame	: 182/4TCZ	Locked rotor time	: 19 s (hot) 35 s (cold)
Output	: 5 HP (3.7 kW)	Temperature rise ⁴	: 105 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l
Rated current	: 5.69 A	Degree of protection	: IP55
L. R. Amperes	: 54.1 A	Cooling method	: IC410 - TENV
LRC (p.u.)	: 9.5 Code M	Mounting	: F-1
No load current	: 3.30 A	Direct of rotation ¹	: Both
Rated speed	: 1762 rpm	Starting method	: VFD
Slip	: 2.11 %	Approx. weight ³	: 43.0 kg
Rated torque	: 2.06 kgfm	Design	: A
Locked rotor torque	: 340 %		
Pull up torque	: 195 %		
Breakdown torque	: 420 %		
Insulation class	: H		
Service factor	: 1.00		
Moment of inertia (J)	: 0.0169 kgm ²		

Output	Start	50%	75%	100%	Load type	: Parabolic torque
Efficiency (%)	-	88.5	89.5	89.5	Load torque	: 2.05 kgfm
Power factor	0.58	0.51	0.64	0.73	Load inertia (J=GD ² /4)	: 0.0169 kgm ²

Operation limits with inverter
 6 Hz up to 60 Hz (Variable torque): 2.05 kgfm
 Maximum peak voltage phase-to-phase <= 2400 V
 dV/dt <= 7800 V/μs
 Rise time >= 0,1 μs

	Drive end	Non drive end	Foundation loads
Bearing type	6207-ZZ	6206-ZZ	Maximum traction : 158 kgf
Lubrication interval	-	-	Maximum compression : 201 kgf
Lubricant amount	-	-	
Lubricant type	MOBIL POLYREX EM		

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.2	9.4	8.7	5.3	3.7	2.4	1.7

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Tests	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancels the previous one, which must be eliminated.

- (1) When viewed from the drive end.
 (2) Measured at 1m and with tolerance of +3dB(A).
 (3) Approximate weight subject to changes after manufacturing process.
 (4) At the rated point.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Summary of changes		Performed	Checked	Date
Performed by	ialejandra			865216/2024	
Checked by	barrios			Page	Revision
Date	20/12/2024			1/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization.

DATA SHEET



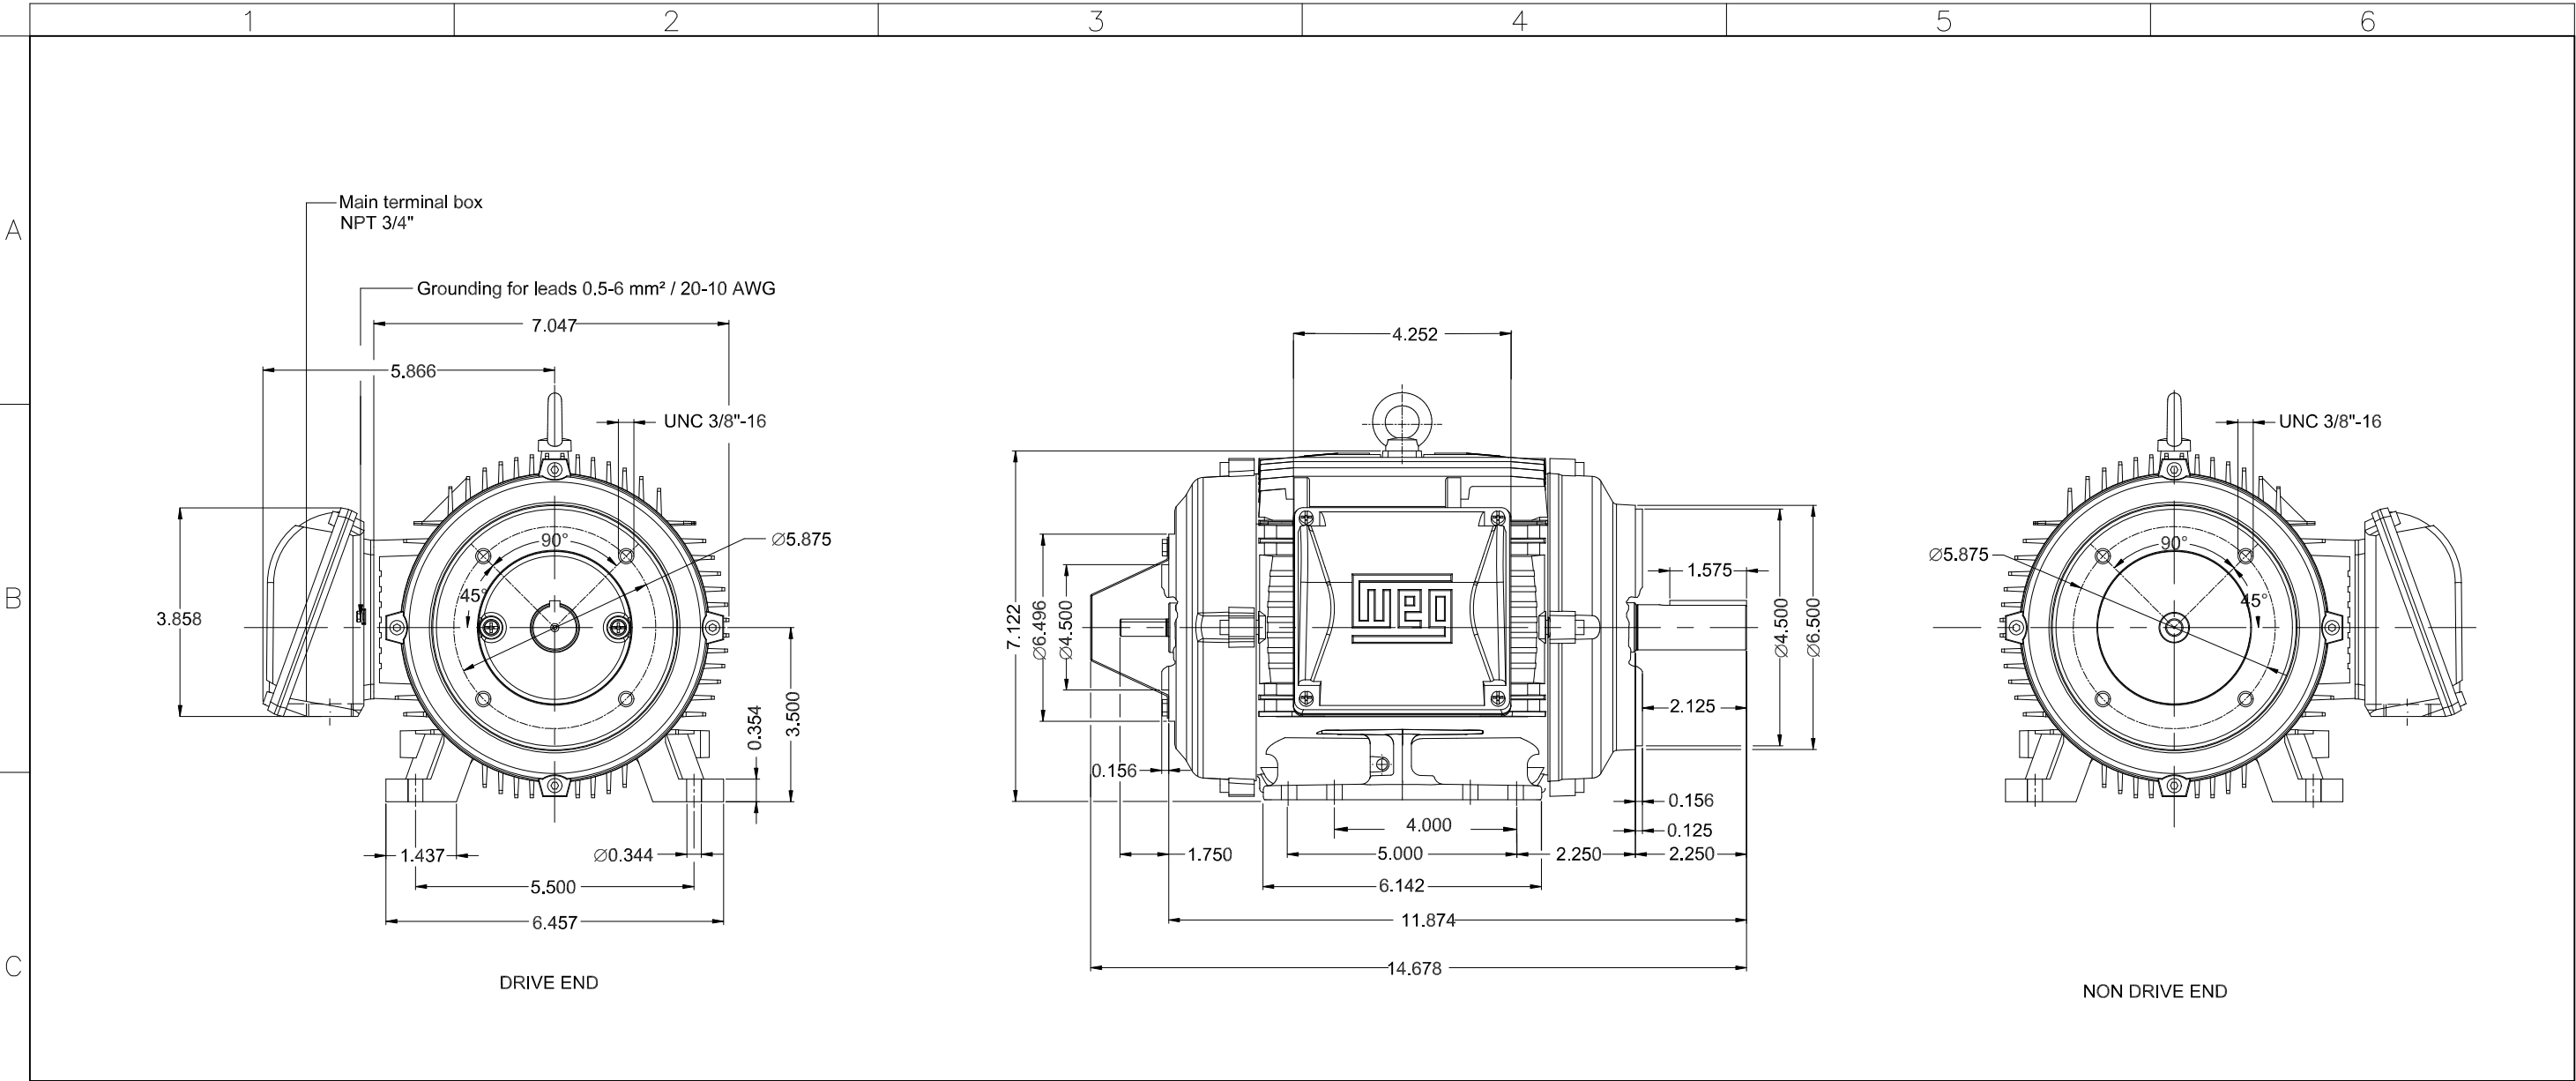
Three Phase Induction Motor - Squirrel Cage




Customer : V.J. PAMENSKY CANADA INC.

Product line : W22 - Nema Premium Efficiency (Centro 3100)

Rev.	Summary of changes		Performed	Checked	Date
Performed by	ialejandra			865216/2024	
Checked by	barrios			Page	Revision
Date	20/12/2024			2/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization.



D										
E	Without fan									
	Bearing cap									
	Thermal protection to switch off - thermostat 155°C									
	Without fan cover									
	Color RAL 5009									
	Painting plan 207A									
	Service factor 1.0									
	Mounting NEMA F-1									
	Mounting B34D									
DE Shaft End 				NDE Shaft End 						
5 HP 04 Poles 60 Hz										
V.J. PAMENSKY CANADA INC.										
		INITIAL ISSUE				BARRAZA	IGNACIOS	RIOMIGUEL	17.01.2025	00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	BARRAZA	 THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME 182/4TCZ IP55 TENV				1635257902				
CHECKED	IGNACIOS									
RELEASED	RIOMIGUEL									
REL. DATE	17.01.2025	WEG	HUEHUETOCA			[Ventas Exportacion]		SHEET	1 / 1	