

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Premium Efficiency (DOE) Jet Pump - Forma J Product code : 19098121

Frame	: 56J	Locked rotor time	: 26 s (hot) 47 s (cold)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 115/208-230 V	Altitude	: 3280 ft
Rated current	: 6.60/3.65-3.30 A	Protection degree	: IP55
L. R. Amperes	: 51.5/28.5-25.7 A	Cooling method	: IC411 - TEFC
LRC	: 7.8	Mounting	: F-1/B14R(D)
No load current	: 2.20/0.948-1.10 A	Rotation ¹	: Counter clockwise
Rated speed	: 1750 rpm	Noise level ²	: 54.0 dB(A)
Slip	: 2.78 %	Vibration class	: A
Rated torque	: 2.22 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 280 %	Approx. weight ³	: 35.3 lb
Pull up torque	: 235 %	Painting plan	: 207N
Breakdown torque	: 250 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: N
Service factor	: 1.15		
Moment of inertia (J)	: 0.1092 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	74.0	78.5	78.5
Power Factor	0.78	0.83	0.87

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type	6203-2RS	6202-2RS
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: -
Max. compression	: -

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1853363888	
Checked by	AUTOMATICO			Page	Rev.
Date	27/05/2026			1 / 2	0

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Premium Efficiency (DOE) Jet Pump - Forma J

Product code : 19098121


Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1853363888		
Checked by	AUTOMATICO		Page	Rev.	
Date	27/05/2026		2 / 2	0	

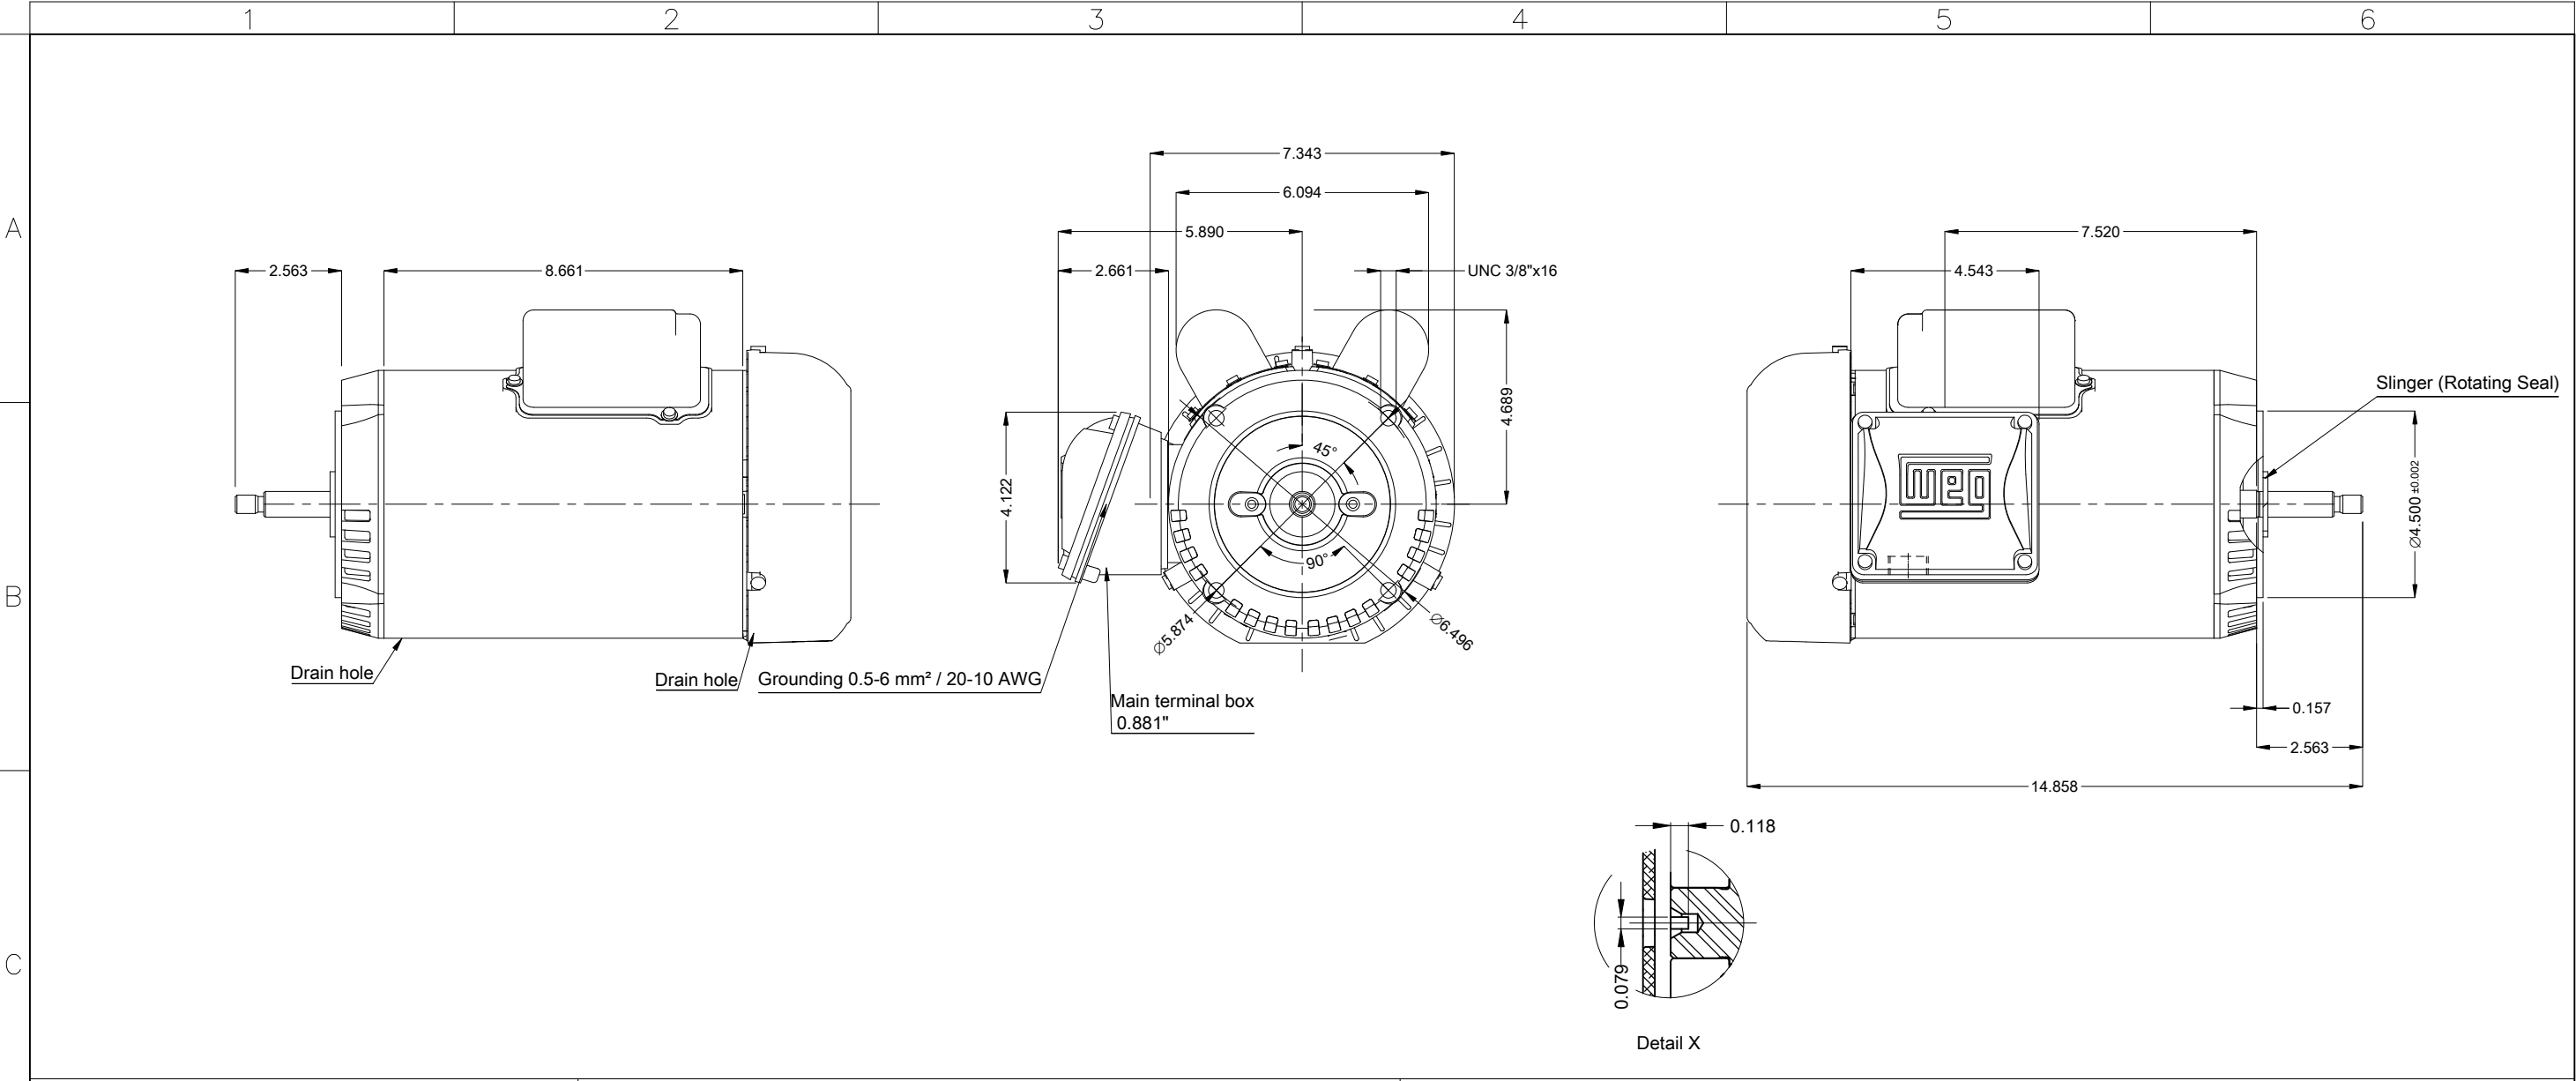

D		0.75 HP 04 Poles 60 Hz										A	
		V.J. PAMENSKY CANADA INC.											
												Scale 1 : 4	
								PIRWUSER				00	
		ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER	
E	Fan cover - steel plate Color Munsell N 1 matte black Painting plan 207N Mounting MARKET F-1/B14R(D) Mounting F-1/B14R(D)				EXECUTED	PIRWUSER		SINGLE PH. MOTOR ROLLED STEEL JET PUMP THREADED PRELIM			PREVIEW		
					CHECKED			FRAME 56J IP55 TEFC					
					RELEASED								
					REL. DATE								
							SHEET		1 / 1				