

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : Special Motor

Frame	: 56CZ	Locked rotor time	: 16 s (hot) 29 s (cold)
Output	: 2 HP (1.5 kW)	Temperature rise	: 105 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 3280 ft
Rated current	: 6.04/3.02 A	Protection degree	: IP55
L. R. Amperes	: 49.5/24.8 A	Cooling method	: IC410 - TENV
LRC	: 8.2 Code L	Mounting	: F-1/B34R(D)
No load current	: 3.66/1.83 A	Rotation ¹	: Both
Rated speed	: 1750 rpm	Noise level ²	: -
Slip	: 2.78 %	Vibration class	: A
Rated torque	: 6.00 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 350.0 %	Approx. weight ³	: 51.2 lb
Pull up torque	: 295.0 %	Painting plan	: 207N
Breakdown torque	: 350.0 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: H	Design	: B
Service factor	: 1.00		
Moment of inertia (J)	: 0.1590 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	85.5	86.5	86.5
Power Factor	0.48	0.62	0.72

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type	6204-ZZ	6203-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	:
Max. compression	:

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date	
Performed by	martint					
Checked by					Page	Rev.
Date	06/03/2026				1 / 2	0

DATA SHEET

Three Phase Induction Motor - Squirrel Cage




Customer : V.J. PAMENSKY CANADA INC.

Product line : Special Motor

Thermal protection				
ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155°C

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7		
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12		
	Noise	: MG1 - Part 9				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.			
Rev.		Changes Summary		Rev.	Checked	Date
Performed by		martint		Page 2 / 2 Rev. 0		
Checked by						
Date		06/03/2026				

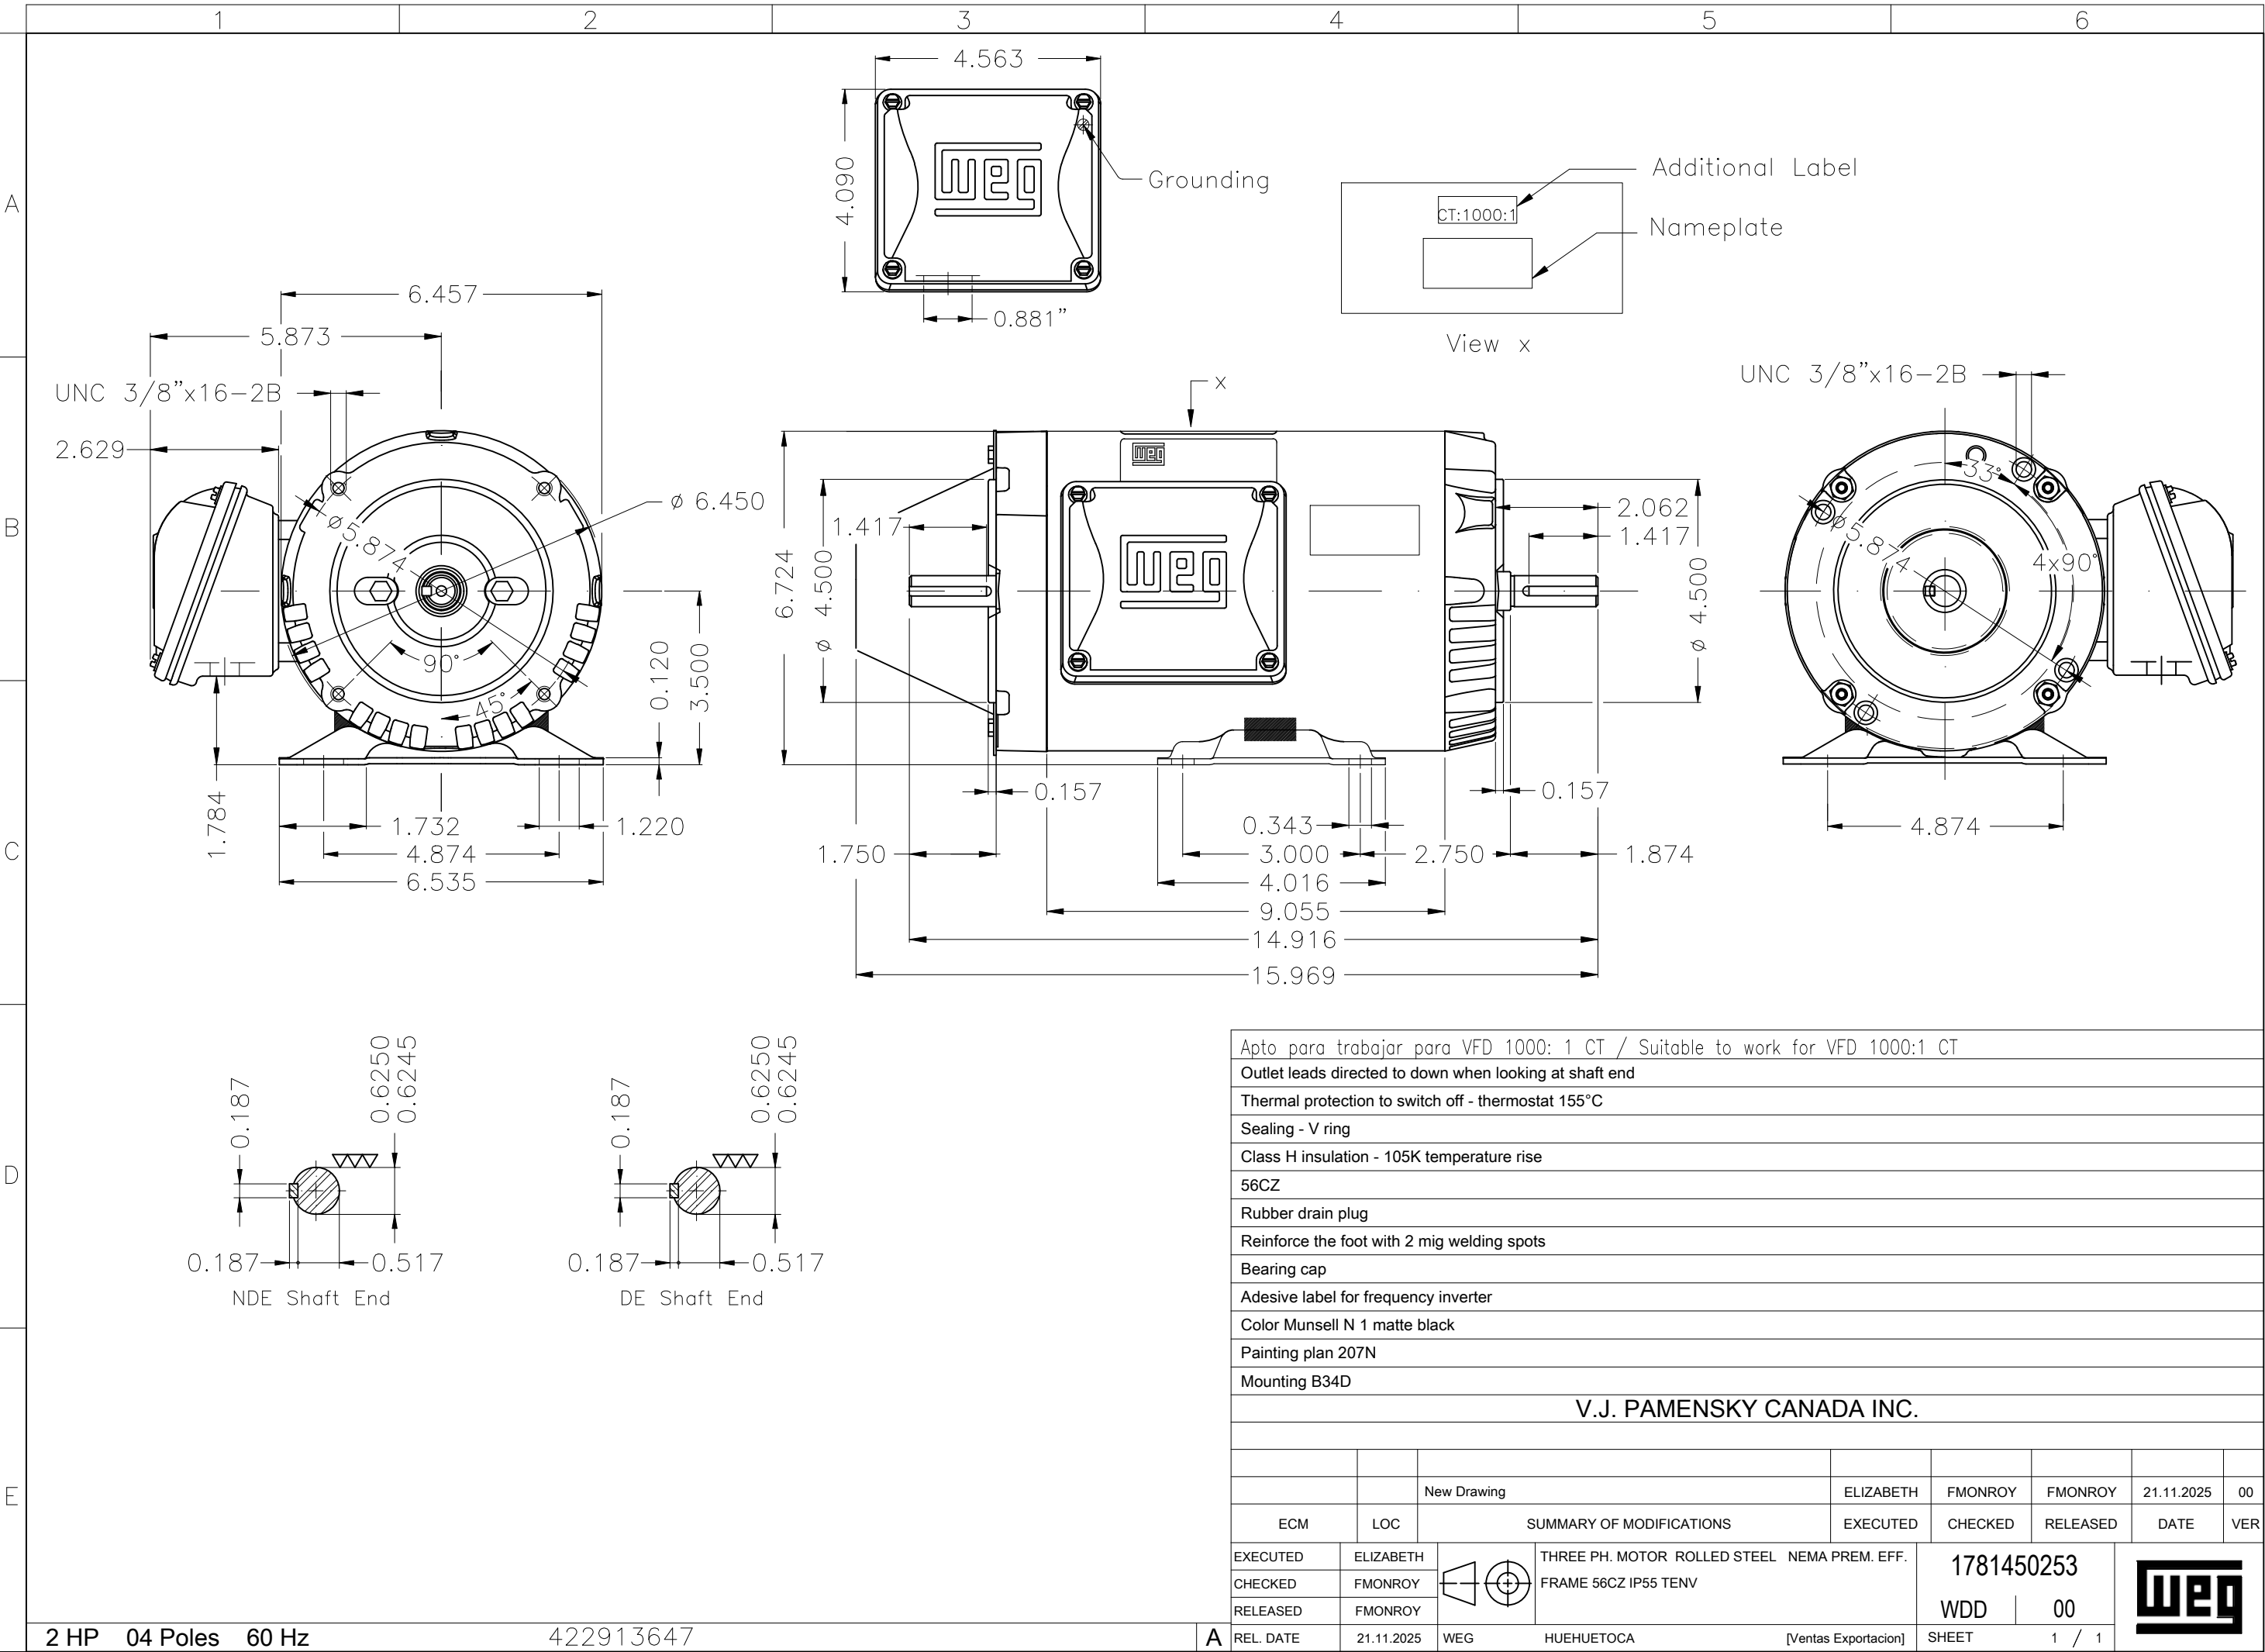

Apto para trabajar para VFD 1000: 1 CT / Suitable to work for VFD 1000:1 CT						
Outlet leads directed to down when looking at shaft end						
Thermal protection to switch off - thermostat 155°C						
Sealing - V ring						
Class H insulation - 105K temperature rise						
56CZ						
Rubber drain plug						
Reinforce the foot with 2 mig welding spots						
Bearing cap						
Adesive label for frequency inverter						
Color Munsell N 1 matte black						
Painting plan 207N						
Mounting B34D						
V.J. PAMENSKY CANADA INC.						
New Drawing			ELIZABETH	FMONROY	FMONROY	21.11.2025 00
ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE VER
EXECUTED	ELIZABETH	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 56CZ IP55 TENV	1781450253			
CHECKED	FMONROY					
RELEASED	FMONROY					
REL. DATE	21.11.2025	WEG HUEHUETOCA	[Ventas Exportacion]	SHEET	1 / 1	

2 HP 04 Poles 60 Hz 422913647