

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : Special Motor

Product code : 18404332

Frame	: 56HJ	Locked rotor time	: 4 s (hot) 7 s (cold)
Output	: 5 HP (3.7 kW)	Temperature rise	: 105 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 208-230 V	Altitude	: 3280 ft
Rated current	: 22.6-20.4 A	Protection degree	: IP21
L. R. Amperes	: 158-143 A	Cooling method	: ODPFC
LRC	: 7.0 Code H	Mounting	: F-1/B34R(D)
No load current	: 3.50-7.00 A	Rotation ¹	: Counter clockwise
Rated speed	: 3450 rpm	Noise level ²	: 68.0 dB(A)
Slip	: 4.17 %	Vibration class	: A
Rated torque	: 7.60 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 300.0 %	Approx. weight ³	: 53.4 lb
Pull up torque	: 255.0 %	Painting plan	: 207N
Breakdown torque	: 260.0 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: L
Service factor	: 1.00		
Moment of inertia (J)	: 0.0854 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	74.0	80.0	82.0	Load torque	: -
Power Factor	0.90	0.95	0.96	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads
Bearing type #1	6203-2RS	6202-2RS	Max. traction : -
Bearing type #2	-	-	Max. compression : -
Lubrication interval	-	-	
Lubricant amount #1	-	-	
Lubricant amount #2	-	-	
Lubricant type	MOBIL POLYREX EM		

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1866066254		
Checked by	AUTOMATICO		Page	Rev.	
Date	26/06/2026		1 / 2	0	

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : Special Motor

Product code : 18404332


Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1866066254	
Checked by	AUTOMATICO			Page	Rev.
Date	26/06/2026			2 / 2	0

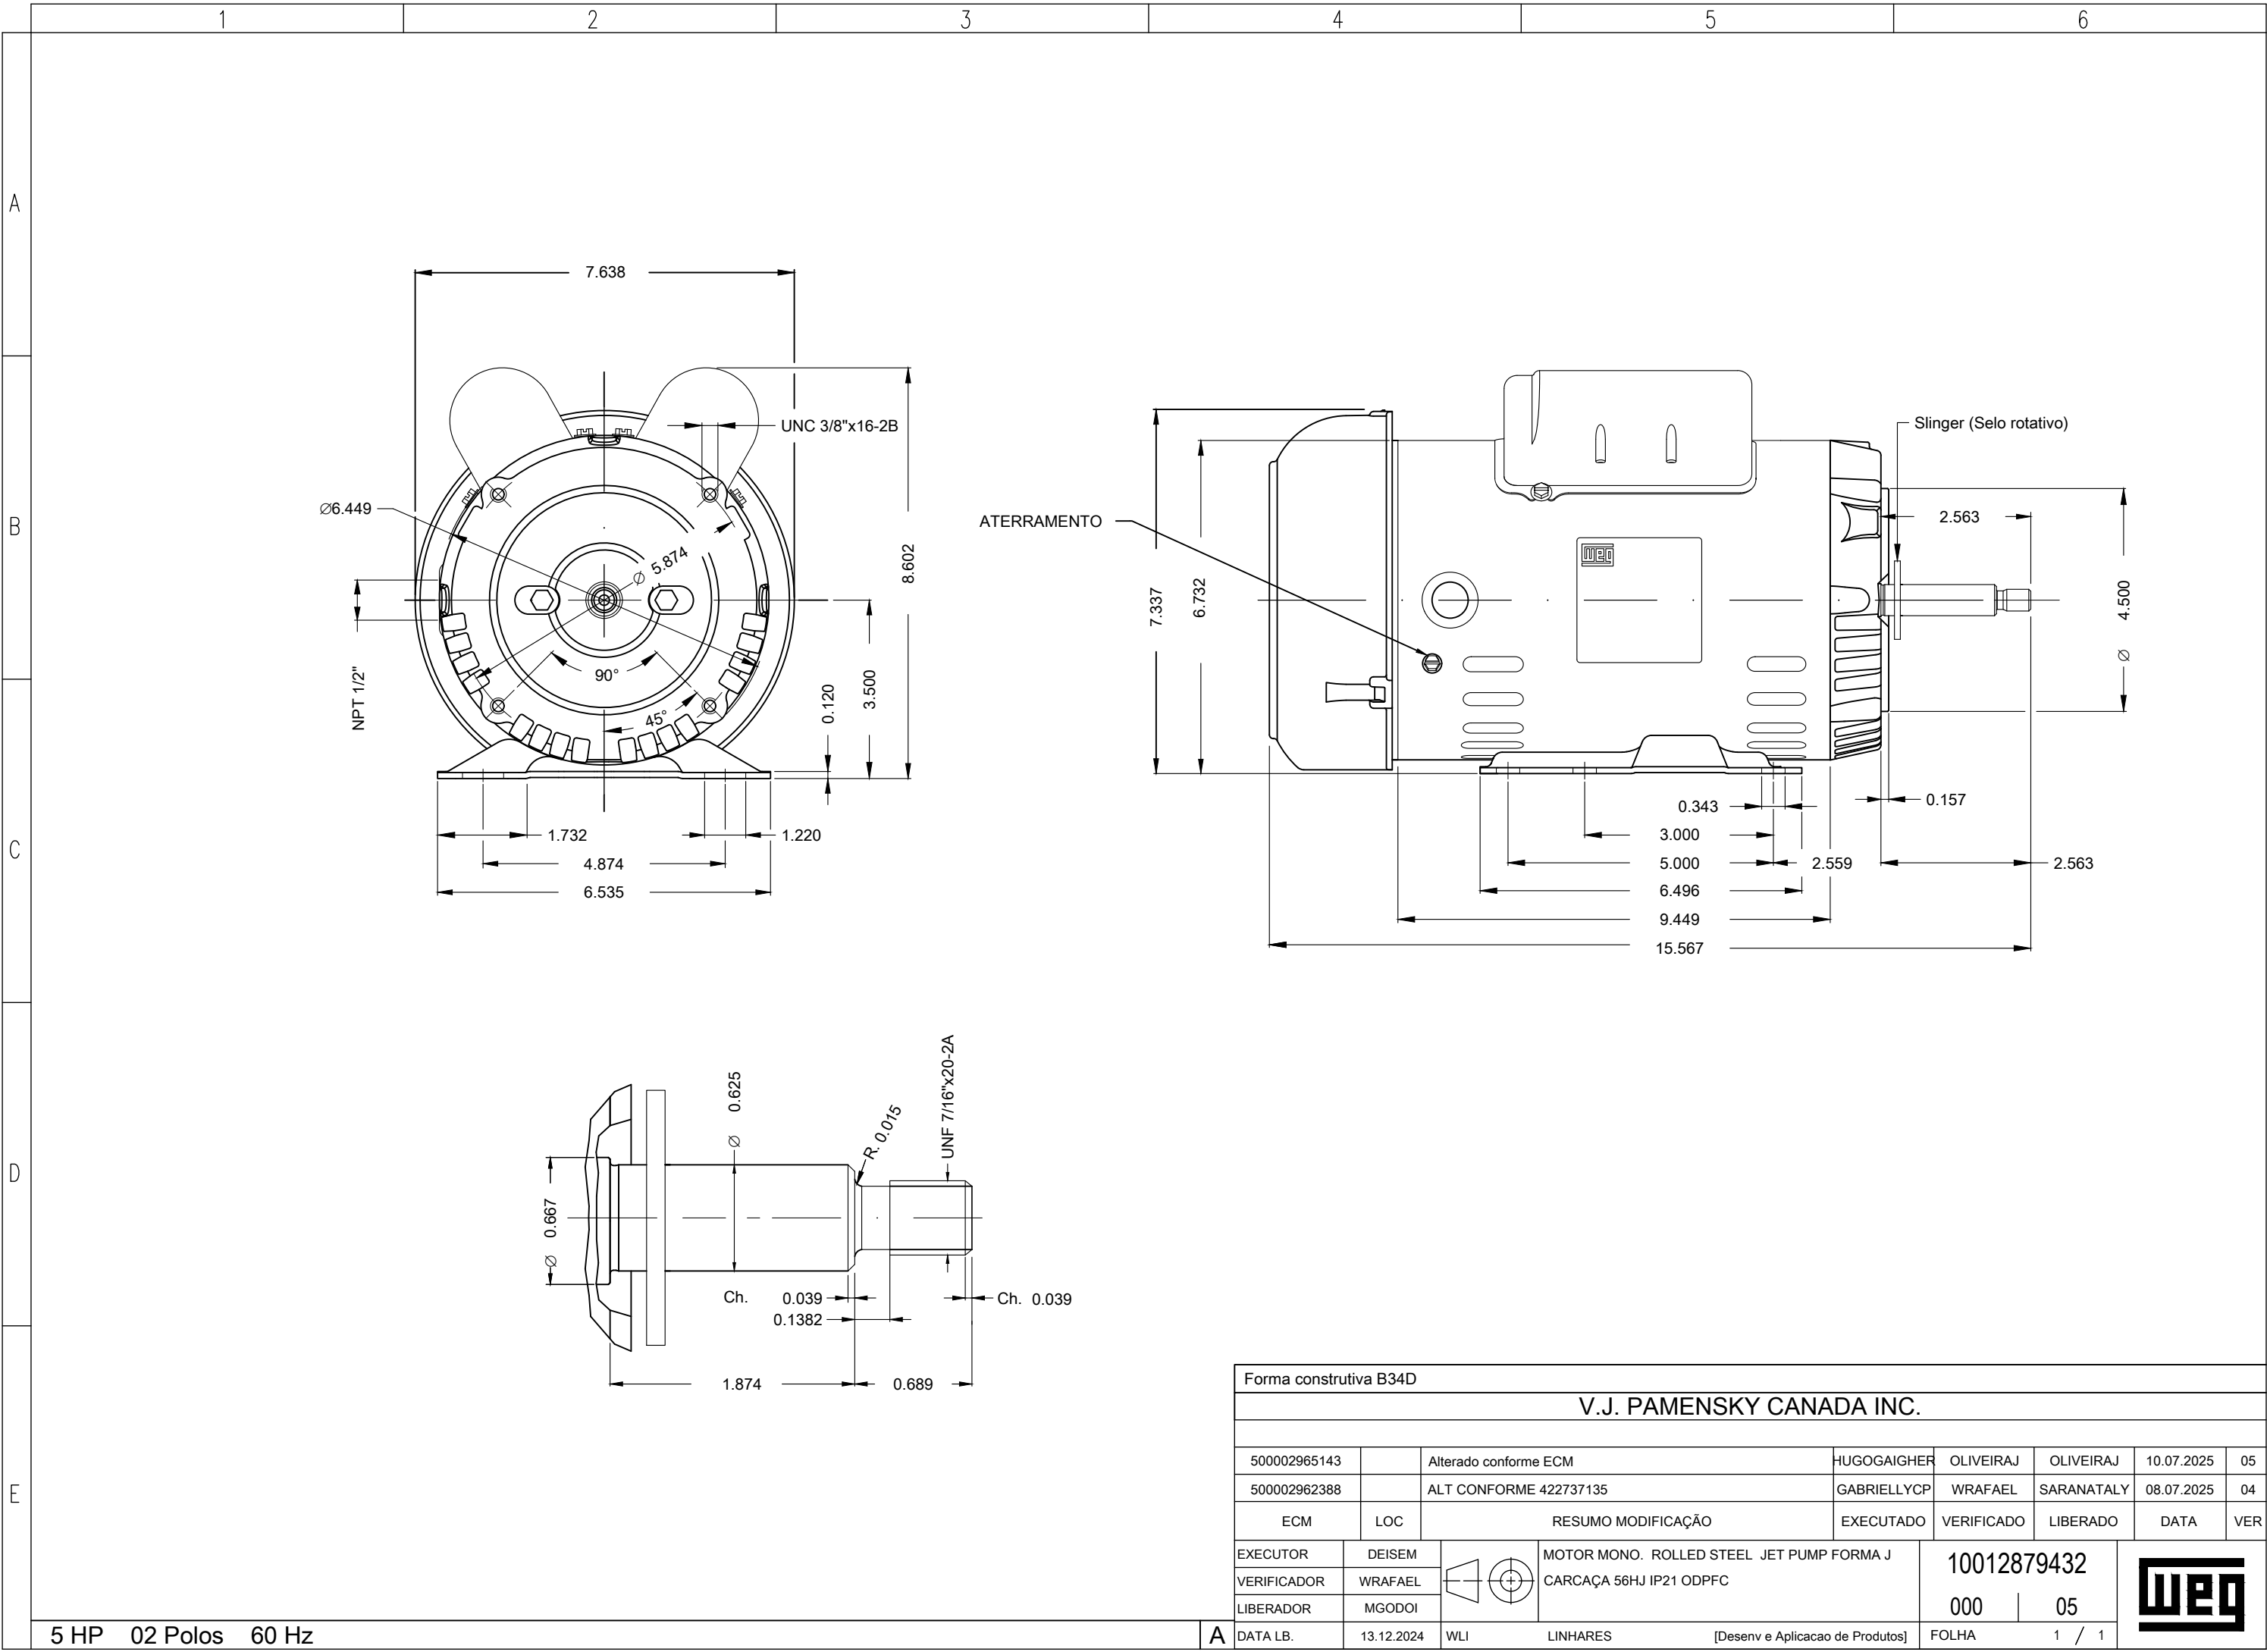

Forma construtiva B34D							
V.J. PAMENSKY CANADA INC.							
500002965143		Alterado conforme ECM	HUGOGAIGHER	OLIVEIRAJ	OLIVEIRAJ	10.07.2025	05
500002962388		ALT CONFORME 422737135	GABRIELLYCP	WRAFAEL	SARANATALY	08.07.2025	04
ECM	LOC	RESUMO MODIFICAÇÃO	EXECUTADO	VERIFICADO	LIBERADO	DATA	VER
EXECUTOR	DEISEM		MOTOR MONO. ROLLED STEEL JET PUMP FORMA J CARÇA 56HJ IP21 ODPFC			10012879432 000 05	
VERIFICADOR	WRAFAEL						
LIBERADOR	MGODOI						
DATA LB.	13.12.2024	WLI	LINHARES	[Desenv e Aplicacao de Produtos]		FOLHA	1 / 1

5 HP 02 Polos 60 Hz

A