

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 14459511		
Frame : 56HC	Insulation class : F	Cooling method : IC01 - ODP	Mounting : F-1	
Duty cycle : Cont.(S1)	Ambient temperature : -20°C to +40°C	Rotation ¹ : Both (CW and CCW)	Starting method : Direct On Line	
Altitude : 1000 m.a.s.l.	Design : L	Approx. weight ³ : 18.5 kg	Moment of inertia (J) : 0.0032 kgm ²	
Output [HP]	2			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	16.8/9.29-8.40			
L. R. Amperes [A]	144/79.9-72.2			
LRC [A]	8.6x(Code K)			
No load current [A]	4.40/1.90-2.20			
Rated speed [RPM]	3500			
Slip [%]	2.78			
Rated torque [kgfm]	0.415			
Locked rotor torque [%]	250			
Breakdown torque [%]	280			
Service factor				
Temperature rise	80 K			
Locked rotor time	14s (cold) 8s (hot)			
Noise level ²	58.0 dB(A)			
Efficiency (%)	25%			
	50%	76.0		
	75%	81.0		
	100%	82.9		
Power Factor	25%			
	50%	0.90		
	75%	0.94		
	100%	0.94		
Bearing type : 6204 ZZ	Drive end	Non drive end	Foundation loads	
Sealing : Without			Max. traction : 28 kgf	
	Bearing Seal	Bearing Seal	Max. compression : 46 kgf	
Lubrication interval : -	-	-		
Lubricant amount : -	-	-		
Lubricant type : Mobil Polyrex EM				
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by			Page 1 / 2	Revision
Checked by				
Date	17/05/2022			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 14459511

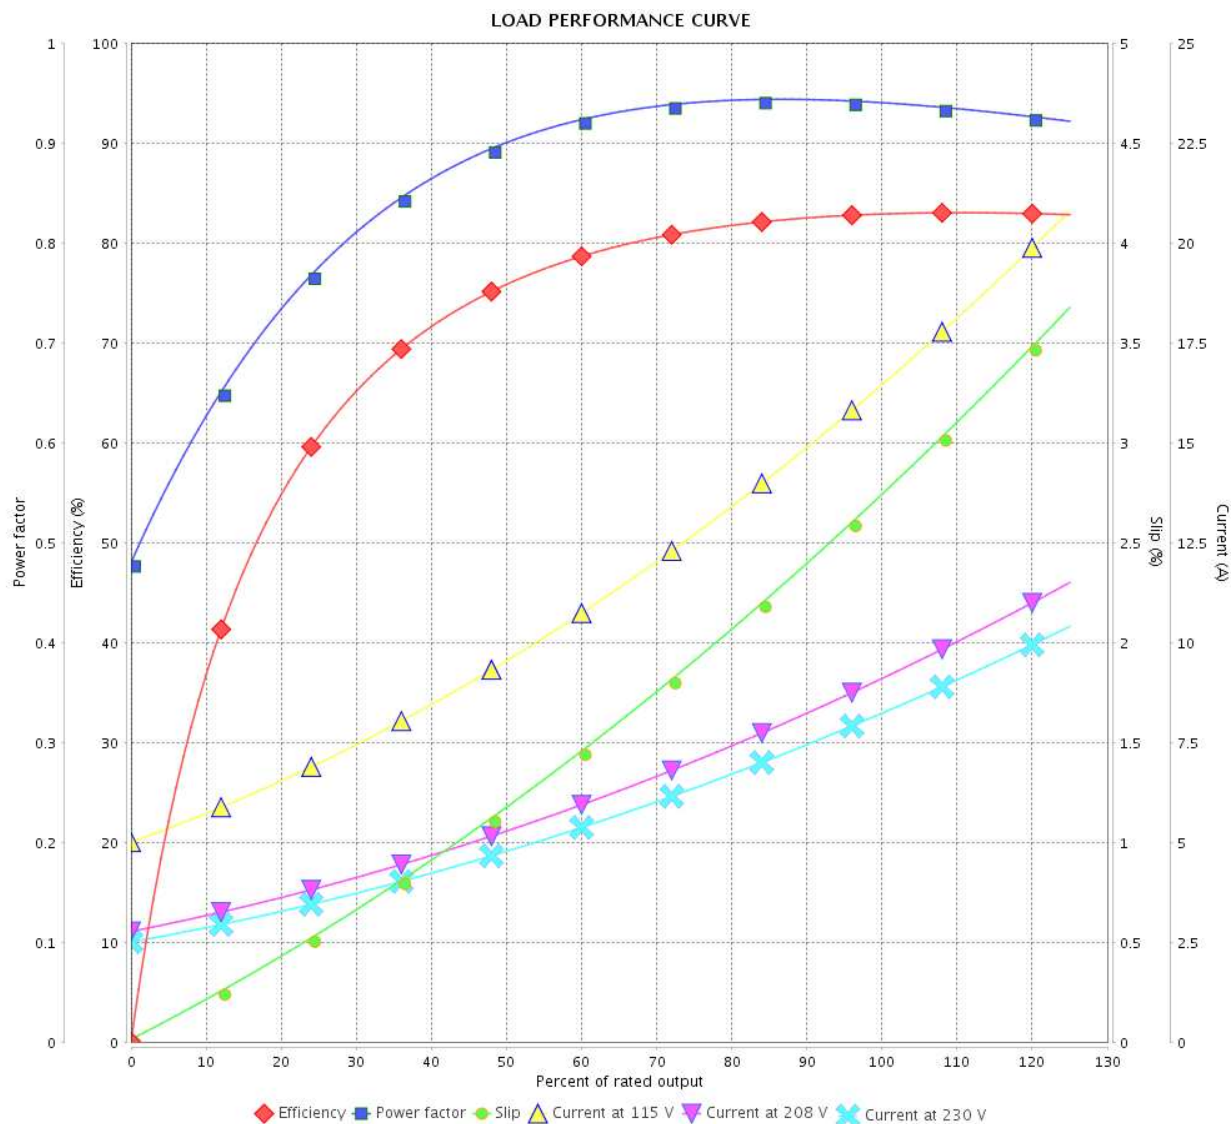



Performance : 115/208-230 V 60 Hz 2P

Rated current : 16.8/9.29-8.40 A
 LRC : 8.6
 Rated torque : 0.415 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 280 %
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0032 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : L

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

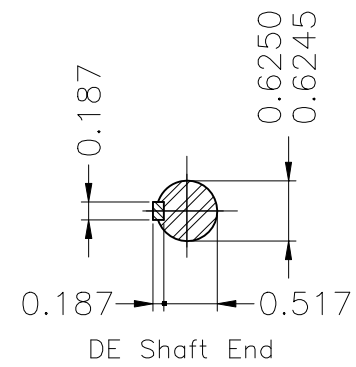

Mounting B34D									
						HYBRISUSER			00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE VER
EXECUTED	HYBRISUSER		SINGLE PH. MOTOR ROLLED STEEL PREM. EFF. FRAME 56HC IP21 ODP			PREVIEW WDD 00			
CHECKED									
RELEASED									
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			

WEG's property. Forbidden reproduction without previous authorization.

Dimensions in inches

XME	A3
-----	----